

车载冰箱 Car Refrigerator

— “路”相伴 享受“库”生活
“LUck” with you, enjoy your “KC”ol” outdoor life.



COMPANY PROFILE

公司简介

Oulun Group is a large-scale refrigeration diversified comprehensive enterprise specializing in the research and development, design, manufacture, sales and service of car refrigerators, air dehumidification, humidification, purification and other air equipment. It currently has more than 1,000 employees, nearly 50 R&D personnel, 167 various inventions and technical patents, a total of 144,000 square meters of production base, the first phase of production base covers an area of 20 acres, the factory building is 27,000 square meters, and the completed second phase of intelligent production base covers an area of 86 acres, 117,000 square meters of factory buildings, and a planned annual production capacity of more than 3 million units.

The car refrigerator division has a total investment of 50 million yuan, with a planned annual production capacity of 600,000 units. With intelligence as the production line standard, it focuses on the R&D, design, production and sales of car refrigerators, and provides intelligent mobile refrigeration products and solutions for global users.

During the period, focusing on product lines such as smart mobile refrigerators, truck refrigerators, off-road vehicle refrigerators, RV yacht refrigerators, commercial vehicle armrest refrigerators, and new energy vehicle refrigerators, we cooperated with many global automakers, RV/refitted vehicles, 4S groups/distributors, etc. Head customers to cooperate.



工厂认证 Factory Certification



ISO



IATF16949



BSCI

产品认证 Product Certification



CCC



UKCA



DOE



FCC



ERP



CE



RoHS

All-in-one refrigerator and ice maker
冰箱制冰一体机



Custom refrigerator
for business car
商务定制冰箱



Car refrigerator
车载冰箱



Portable refrigerator
便携冰箱

Cooling
Up to -20°C
Heating
Up to 50°C



Outdoor refrigerator
户外冰箱



PRODUCT
MATRIX
产品矩阵

PRODUCT LIST

产品目录

F026A 新品加推中/New product recommendation



F028A 新品加推中/New product recommendation



加热款/工具电池款

新品加推中/New product recommendation



F009A 新品加推中/New product recommendation



F011A 新品加推中/New product recommendation



F012A 新品加推中/New product recommendation



EA-D 新品加推中/New product recommendation



PRODUCT LIST

产品目录

F016A 新品加推中/New product recommendation



F001A 新品加推中/New product recommendation



F006A 新品加推中/New product recommendation



F005A 新品加推中/New product recommendation



F005B 新品加推中/New product recommendation



F005C 新品加推中/New product recommendation



EF 单温系列/Single temperature zone series



PRODUCT LIST
产品目录

ED-A 双温双控系列/Dual temperature and dual control



ED40-A



ED50-A



ED60-A

选配



蓝牙APP
Bluetooth App



可拆卸电池
Lithium battery

ED-C 双温双控系列/Dual temperature and dual control



ED40-C



ED50-C



ED60-C

选配



蓝牙APP
Bluetooth App



可拆卸电池
Lithium battery

EC 双温系列/Dual temperature zone series



EC30



EC40



EC50

选配



蓝牙APP
Bluetooth App

EB 单温系列/Single temperature zone series



EB18



EB25

选配



蓝牙APP
Bluetooth App

EB-C 新品加推中/New product recommendation



EB18-C



EB25-C

选配



蓝牙APP
Bluetooth App

EA 双温系列/Dual temperature zone series



EA35



EA45



EA55

选配



蓝牙APP
Bluetooth App

EA-B 双温系列/Dual temperature zone series



EA35-B



EA45-B



EA55-B

选配



蓝牙APP
Bluetooth App

PRODUCT LIST
产品目录

EA-C 双温系列/Dual temperature zone series



EA35-C



EA45-C



EA55-C

选配



蓝牙APP
Bluetooth App

卡车冰箱 新品加推中/New product recommendation



F007-A/-B/-C款

选配



蓝牙APP
Bluetooth App

改装冰箱 商务定制改装冰箱系列/Modified series



EH4



EH4-Y

DW 储能电源/Energy storage power supply



DW300



DW600

MD 太阳能板/Solar panels



MD-100

产品亮点/ Product Highlights

- 

10分钟极速制冷

10 minutes of rapid cooling
- 

外嵌开瓶器

Embedded bottle opener
- 

便携拉杆滑轮设计

Telescope handle and wheels help you move easily
- 

双向USB-C


Reversible USB-C



F026A Series 系列




OL-BCD42-F026A




冷冻/冷藏区/Freezer/Refrigerator Area
L327.5*W332*D325.4(mm)
冷冻/冷藏区/Freezer/Refrigerator Area
L166.3*W332*D135.1(mm)

OL-BCD50-F026A



冷冻/冷藏区/Freezer/Refrigerator Area
L326.5*W332*D375.4(mm)
冷冻/冷藏区/Freezer/Refrigerator Area
L166.3*W332*D184.6(mm)

OL-BCD58-F026A



冷冻/冷藏区/Freezer/Refrigerator Area
L325.7*W332*D425.4(mm)
储藏区/Storage area
L166.3*W332*D234.2(mm)



型号/Model	OL-BCD42-F026A	OL-BCD50-F026A	OL-BCD58-F026A
包装尺寸/Packing size	725*500*476mm	725*500*526mm	725*500*576mm
产品尺寸/Product dimensions	700*447*416mm	700*447*466mm	700*447*516mm
颜色/Color	灰黑(可订制) Gray and black (customizable)		
净重/N.W 毛重/G.W	14.3/16.1Kg	15.0/16.8Kg	15.8/17.5Kg
制冷剂/Refrigerant	R134a/R600a	R134a/R600a	R134a/R600a
制冷范围/ Temperature interval of refrigeration	-20℃~20℃	-20℃~20℃	-20℃~20℃
最大温差/Maximum temperature difference	52℃	52℃	52℃
额定电压/Nominal voltage	DC12V/24V,AC100-240V		
额定功率/Rated power	45W(±20%)	45W(±20%)	45W(±20%)
装柜量/FCL Quantity/20GP,40HQ	140/292	140/365	140/365

产品亮点/ Product Highlights



10分钟极速制冷
10 minutes of rapid cooling



便捷移动
Easy to carry




超大存储容量
Ultra-large capacity



F028A Series
系列




OL-BCD32-F028A



冷冻/冷藏区/Freezer/Refrigerator Area
L485.3*W300.5*D247.5(mm)




OL-BCD42-F028A



冷冻/冷藏区/Freezer/Refrigerator Area
L485.3*W300.5*D317.5(mm)



OL-BCD52-F028A



冷冻/冷藏区/Freezer/Refrigerator Area
L485.3*W300.5*D387.5(mm)



型号/Model	OL-BCD32-F028A	OL-BCD42-F028A	OL-BCD52-F028A
包装尺寸/Packing size	670*430*432mm	670*430*502mm	670*430*572mm
产品尺寸/Product dimensions	615*375*372mm	615*375*442mm	615*375*512mm
颜色/Color	黑色(可订制) Black (customizable)		
净重/N.W 毛重/G.W	13.2/15.6Kg	14.1.5/16.5Kg	14.9/17.7Kg
制冷剂/Refrigerant	R134a/R600a	R134a/R600a	R134a/R600a
制冷范围/ Temperature interval of refrigeration	-20℃~20℃	-20℃~20℃	-20℃~20℃
最大温差/Maximum temperature difference	52℃	52℃	52℃
额定电压/Nominal voltage	DC12V,AC100-240V		
额定功率/Rated power	45W(±20%)	45W(±20%)	45W(±20%)
装柜量/FCL Quantity/20GP,40HQ	220/540	176/450	176/360

冷暖便携式冰箱

Portable Cooling and Heating Refrigerator



冷暖两用
Cold and warm



节能省电
Energy saving



立体锁温
Temperature locking



精致空间
Exquisite Space



型号/Model		ED50-H
包装尺寸/Packing size		775*525*585mm
产品尺寸/Product dimensions	ED50A-H →	674*409*516(mm)
	ED50C-H →	765*470*516(mm)
颜色/Color		黑白(可订制) Black and white (customizable)
净重/N.W 毛重/G.W	ED50A-H →	16/18.8Kg
	ED50C-H →	19.4/22.5Kg
制冷剂/Refrigerant		R134a/R600a
制冷范围/ Temperature interval of refrigeration		-20°C~20°C
制热范围/ Heating Temperature Range		20°C~50°C
最大温差/Maximum temperature difference		52°C
额定电压/Nominal voltage		DC 12V/24V
额定功率/Rated power		75W(±20%)
装柜量/FCL Quantity/20GP,40HQ		132/264

冷暖便携式冰箱

Portable Cooling and Heating Refrigerator



冷暖两用
Cold and warm




节能省电
Energy saving



立体锁温
Temperature locking



精致空间
Exquisite Space

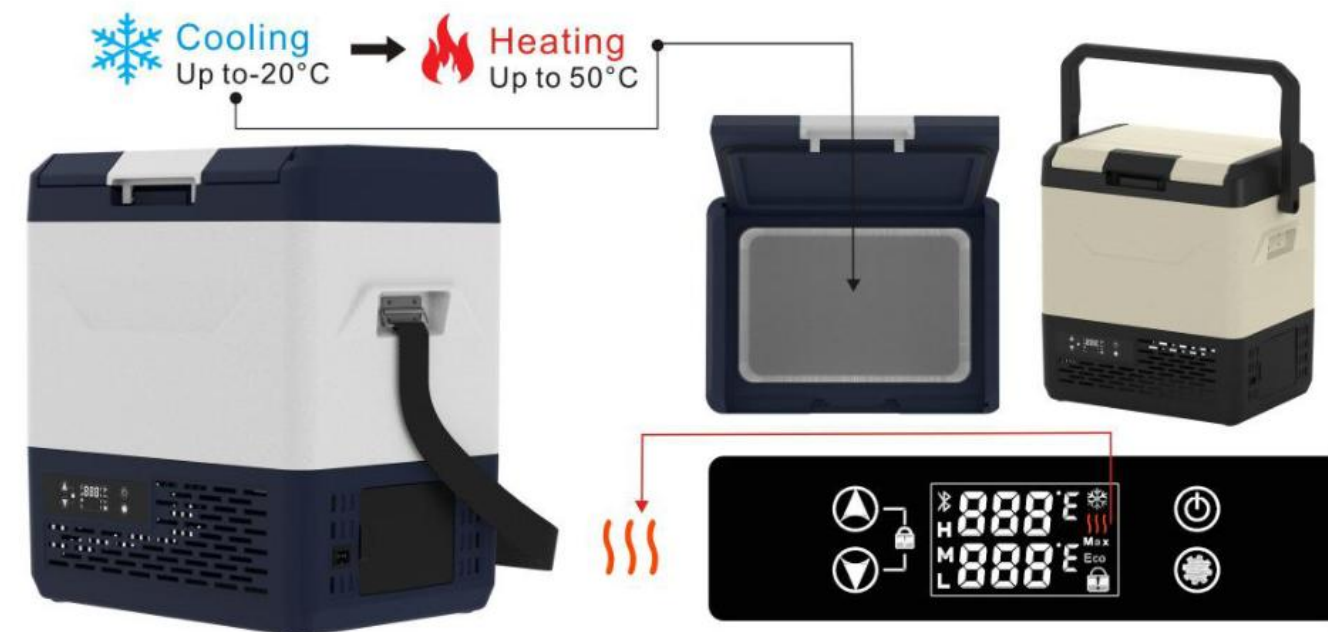

型号/Model		EF15-H
包装尺寸/Packing size		475*370*530(mm)
产品尺寸/Product dimensions		412*292*454mm (Shoulder strap) 459*292*611mm(Handle)
颜色/Color		蓝白(可订制) Blue and White (customizable)
净重/N.W 毛重/G.W		9.2/11.4Kg
制冷剂/Refrigerant		R134a/R600a
制冷范围/ Temperature interval of refrigeration		-20°C~20°C
制热范围/ Heating Temperature Range		20°C~50°C
最大温差/Maximum temperature difference		52°C
额定电压/Nominal voltage		DC 12V/24V
额定功率/Rated power		45W(±20%)
装柜量/FCL Quantity/20GP,40HQ		300/785

冷暖便携式冰箱

Portable Cooling and Heating Refrigerator



冷暖两用
Cold and warm



节能省电
Energy saving



立体锁温
Temperature locking



精致空间
Exquisite Space

Cooling
Up to -20°C



Heating
Up to 50°C



型号/Model	OL-BCD30-F005H
包装尺寸/Packing size	653*431*420(mm)
产品尺寸/Product dimensions	623*378*370(mm)
颜色/Color	灰黑(可订制) Gray and black (customizable)
净重/N.W 毛重/G.W	12.4/15.2Kg
制冷剂/Refrigerant	R134a/R600a
制冷范围/ Temperature interval of refrigeration	-20°C~20°C
制热范围/ Heating Temperature Range	20°C~50°C
最大温差/Maximum temperature difference	52°C
额定电压/Nominal voltage	DC 12V/24V
额定功率/Rated power	45W±20%
装柜量/FCL Quantity/20GP,40HQ	200/540

工具电池款冰箱

Portable refrigerator for tool batteries



10分钟极速制冷
10 minutes of rapid cooling




立体锁温
Temperature locking



工具电池
Tool Batteries



精致空间
Exquisite Space

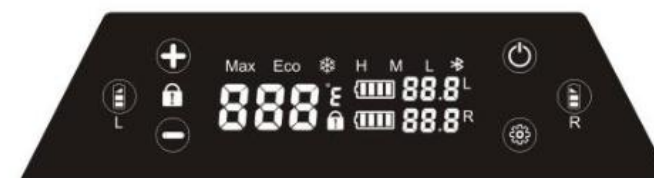

(工具电池参考图)
Tool Battery Reference Image

型号/Model	OL-BCD25TB-F011B
包装尺寸/Packing size	580*362*430(mm)
产品尺寸/Product dimensions	530*330*383(mm)
颜色/Color	冷灰(可订制) Cold ash (customizable)
净重/N.W 毛重/G.W	12.5/13.8Kg
制冷剂/Refrigerant	R134a/R600a
制冷范围/ Temperature interval of refrigeration	-20°C~20°C
最大温差/Maximum temperature difference	52°C
额定电压/Nominal voltage	DC 12V/24V
额定功率/Rated power	45W±20%
装柜量/FCL Quantity/20GP,40HQ	320/792

产品亮点/ Product Highlights

- 

精控冷热
Precision Cooling & Heating
- 

长效保鲜
Lasting Freshness
- 

智能出行
Smart Mobility
- 

精致空间
Exquisite Space



商务定制改装冰箱
Custom refrigerator for business car



型号/Model	OL-BCD6-F009A
包装尺寸/Packing size	517*307*434(mm)
产品尺寸/Product dimensions	404*186*324(mm)
颜色/Color	紫色(可订制) Purple (customizable)
净重/N.W 毛重/G.W	6.45/7.8Kg
制冷剂/Refrigerant	R134a/R600a
制冷范围/ Temperature interval of refrigeration	-6℃~10℃
制热范围/ Heating Temperature Range	35℃~55℃
最大温差/Maximum temperature difference	低于环境温度10℃~15℃ (Below ambient temperature10℃~15℃)
额定电压/Nominal voltage	DC12V,AC100-240V
额定功率/Rated power	45W(±20%)
装柜量/FCL Quantity/20GP,40HQ	410/1018

产品亮点/ Product Highlights



10分钟极速制冷
10 minutes of rapid cooling



外嵌开瓶器
Embedded bottle opener



储藏区设计
Storage area design



F011A Series
系列




OL-BCD15-F011A



冷冻/冷藏区/Freezer/Refrigerator Area
L282*W255*D177(mm)
储藏区/Storage area
L285*W92*D73(mm)




OL-BCD20-F011A



冷冻/冷藏区/Freezer/Refrigerator Area
L282*W255*D245(mm)
储藏区/Storage area
L285*W92*D73(mm)



OL-BCD25-F011A



冷冻/冷藏区/Freezer/Refrigerator Area
L282*W255*D315(mm)
储藏区/Storage area
L285*W92*D73(mm)



型号/Model	OL-BCD15-F011A	OL-BCD20-F011A	OL-BCD25-F011A
包装尺寸/Packing size	580*362*290mm	580*362*360mm	580*362*430mm
产品尺寸/Product dimensions	530*330*243mm	530*330*313mm	530*330*383mm
颜色/Color	灰黑(可订制) Gray and black (customizable)		
净重/N.W 毛重/G.W	8.8/9.7Kg	9.5/10.8Kg	11/12.3Kg
制冷剂/Refrigerant	R134a/R600a	R134a/R600a	R134a/R600a
制冷范围/ Temperature interval of refrigeration	-20℃~20℃	-20℃~20℃	-20℃~20℃
最大温差/Maximum temperature difference	52℃	52℃	52℃
额定电压/Nominal voltage	DC12V/24V,AC100-240V		
额定功率/Rated power	45W(±20%)	45W(±20%)	45W(±20%)
装柜量/FCL Quantity/20GP,40HQ	512/1188	384/924	320/792



产品亮点/ Product Highlights



微电脑控温，冷藏保鲜
Microcomputer temperature control,
refrigeration and preservation



超大存储容量
Ultra-large capacity




便捷移动
Easy to carry

F012A Series
系列




OL-BCD20-F012A



冷藏区/Refrigerator Area
L303*W193*D320(mm)



OL-BCD23-F012A



冷藏区/Refrigerator Area
L303*W193*D380(mm)



OL-BCD26-F012A



冷藏区/Refrigerator Area
L303*W193*D440(mm)



型号/Model	OL-BCD20-F012A	OL-BCD23-F012A	OL-BCD26-F012A
包装尺寸/Packing size	416*302*460mm	416*302*520mm	416*302*580mm
产品尺寸/Product dimensions	360*250*400mm	360*250*460mm	360*250*520mm
颜色/Color	白黑(可订制) Black and White (customizable)		
净重/N.W	4.4/5.9Kg	4.8/6.4Kg	5.2/6.9Kg
毛重/G.W			
制冷片/Cooling plate	TEC1-12706	TEC1-12706	TEC1-12706
制冷范围/ Temperature interval of refrigeration	10℃~25℃	10℃~25℃	10℃~25℃
制热范围/ Heating Temperature Range	25℃~55℃	25℃~55℃	25℃~55℃
最大温差/Maximum temperature difference	低于环境温度10℃~15℃ 低于环境温度10℃~15℃ 低于环境温度10℃~15℃ (Below ambient temperature10℃~15℃) (Below ambient temperature10℃~15℃) (Below ambient temperature10℃~15℃)		
额定电压/Nominal voltage	DC12V,AC100-240V		
额定功率/Rated power	50W(±20%)	50W(±20%)	50W(±20%)
装柜量/FCL Quantity/20GP,40HQ	520/1040	416/1040	416/832

产品亮点/ Product Highlights



微电脑控温，冷藏保鲜
Microcomputer temperature control,
refrigeration and preservation



便捷移动
Easy to carry




超大存储容量
Ultra-large capacity

EA-D Series
系列




EA35-D



冷冻/冷藏区/Freezer/Refrigerator Area
L259*W190*D355.5(mm)
L259*W133*D355.5(mm)
L262*W145*D178(mm)




EA45-D



冷冻/冷藏区/Freezer/Refrigerator Area
L258*W190*D425.5(mm)
L258*W133*D425.5(mm)
L261*W145*D248(mm)



EA55-D



冷冻/冷藏区/Freezer/Refrigerator Area
L257*W188*D495.5(mm)
L257*W132*D495.5(mm)
L260*W145*D318(mm)



型号/Model	EA35-D	EA45-D	EA55-D
包装尺寸/Packing size	704*440*512mm	704*440*582mm	704*440*652mm
产品尺寸/Product dimensions	691*390*440mm	691*390*510mm	691*390*580mm
颜色/Color	灰黑(可订制) Gray and black (customizable)		
净重/N.W 毛重/G.W	15.6Kg/17.7Kg	16.6/18.9Kg	17.9/20.4Kg
制冷剂/Refrigerant	R134a/R600a	R134a/R600a	R134a/R600a
制冷范围/ Temperature interval of refrigeration	-20℃~20℃	-20℃~20℃	-20℃~20℃
最大温差/Maximum temperature difference	52℃	52℃	52℃
额定电压/Nominal voltage	DC12V/24V,AC100-240V		
额定功率/Rated power	45W(±20%)	45W(±20%)	45W(±20%)
装柜量/FCL Quantity/20GP,40HQ	168/430	168/344	126/344

产品亮点/ Product Highlights

 10分钟极速制冷
10 minutes of rapid cooling

 超大存储容量
Ultra-large capacity

 蓝牙APP远程操作
Bluetooth App control



F016A Series 系列




OL-BCD22-F016A



冷冻/冷藏区/Freezer/Refrigerator Area
L351*W243*D248(mm)



OL-BCD29-F016A



冷冻/冷藏区/Freezer/Refrigerator Area
L351*W243*D316(mm)



数码显示屏
Digital display



电池保护等级
Battery protection level



童锁键
Child lock button



温度升
Temp up



温度降
Temp down



设置键
Set key



开/关机
ON/OFF



型号/Model	OL-BCD22-F016A	OL-BCD29-F016A
包装尺寸/Packing size	625*374*380mm	625*374*445mm
产品尺寸/Product dimensions	570*319*326mm	570*319*394mm
颜色/Color	灰黑(可订制) Gray and black (customizable)	
净重/N.W 毛重/G.W	9.8/11.9Kg	10.85/13Kg
制冷剂/Refrigerant	R134a/R600a	R134a/R600a
制冷范围/ Temperature interval of refrigeration	-20°C~20°C	-20°C~20°C
最大温差/Maximum temperature difference	52°C	52°C
额定电压/Nominal voltage	DC12V/24V,AC100-240V	DC12V/24V,AC100-240V
额定功率/Rated power	45W(±20%)	45W(±20%)
装柜量/FCL Quantity/20GP,40HQ	252/798	210/684

产品亮点/ Product Highlights



10分钟极速制冷
10 minutes of rapid cooling



便携拉杆滑轮设计
Telescope handle and wheels
help you move easily



快速制冰
Fast ice making



双开门设计
Double door design





冷冻或冷藏
frozen or refrigerated

制冰
Ice maker

F001AZ Series 系列

OL-BD45-F001AZ
(冰箱制冰一体机)
All-in-one refrigerator and ice maker

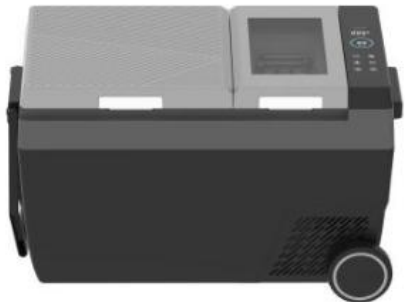

冷藏冷冻区 (Refrigerator/Freezer compartment)
L283*W330*D352(mm)



数码显示屏
Digital display



- 制冰 Ice maker
- 温度升 Temp up
- 设置键 Set key
- 童锁键 Child lock button
- 温度降 Temp down
- 开/关机 ON/OFF

型号/Model	OL-BCD45-F001AZ (冰箱制冰一体机) All-in-one refrigerator and ice maker
包装尺寸/Packing size	785*497*508mm
产品尺寸/Product dimensions	751*445*447mm
颜色/Color	灰黑 (可订制) brown (customizable)
净重/N.W 毛重/G.W	17.2/21.1Kg
制冷剂/Refrigerant	R134a/R600a
制冷范围/ Temperature interval of refrigeration	-20℃~20℃
最大温差/Maximum temperature difference	52℃
额定电压/Nominal voltage	DC 12V/24V
额定功率/Rated power	120W(±20%)
装柜量/FCL Quantity/20FT,40HQ	128/345

产品亮点/ Product Highlights



10分钟极速制冷

10 minutes of rapid cooling



双温双控

Double temperature zone design



双开门设计

Double door design




超大存储容量

Ultra-large capacity




F001A Series 系列

OL-BCD45-F001A

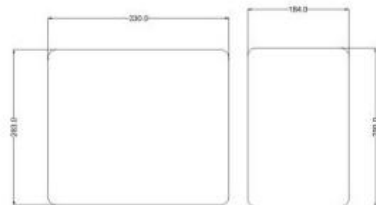

冷藏冷冻区 (Refrigerator/Freezer compartment)
L283*W330*D352(mm)
冷藏冷冻区 (Refrigerator/Freezer compartment)
L184*W290*D168(mm)

OL-BCD55-F001A

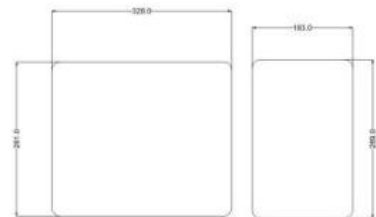

冷藏冷冻区 (Refrigerator/Freezer compartment)
L281*W330*D422(mm)
冷藏冷冻区 (Refrigerator/Freezer compartment)
L183*W289*D238(mm)

数码显示屏
Digital display



左右箱制冷切换
Left/right box refrigeration switch

温度升
Temp up

设置键
Set key

童锁键
Child lock button

温度降
Temp down

开/关机
ON/OFF

型号/Model	OL-BCD45-F001A	OL-BCD55-F001A
包装尺寸/Packing size	785*497*517mm	785*497*587mm
产品尺寸/Product dimensions	753*441*447mm	753*441*517mm
颜色/Color	灰黑 (可订制) brown (customizable)	
净重/N.W 毛重/G.W	16.5/19.8Kg	17.4/21Kg
制冷剂/Refrigerant	R134a/R600a	R134a/R600a
制冷范围/ Temperature interval of refrigeration	-20℃~20℃	-20℃~20℃
最大温差/Maximum temperature difference	52℃	52℃
额定电压/Nominal voltage	DC 12V/24V	DC 12V/24V
额定功率/Rated power	45W(±20%)	45W(±20%)
装柜量/FCL Quantity/20FT,40HQ	128/345	128/276

产品亮点/ Product Highlights



10分钟极速制冷
10 minutes of rapid cooling



蓝牙APP远程操作
Bluetooth App control



双温双控
Double temperature zone design




超大存储容量
Ultra-large capacity




F006 Series 系列

OL-BCD35-F006A




冷冻区/Freezer compartment
L307*W299*D266(mm)
冷藏区/Refrigerator compartment
L307*W185*D114(mm)

OL-BCD45-F006A



冷冻区/Freezer compartment
L307*W299*D326(mm)
冷藏区/Refrigerator compartment
L307*W185*D174(mm)

OL-BCD55-F006A



冷冻区/Freezer compartment
L307*W299*D386(mm)
冷藏区/Refrigerator compartment
L307*W185*D234(mm)

数码显示屏
Digital display



左/右箱制冷切换
Left/right box refrigeration switch

温度降
Temp down

设置键
Set key

温度升
Temp up

开/关机
ON/OFF

型号/Model	OL-BCD35-F006A	OL-BCD45-F006A	OL-BCD55-F006A
包装尺寸/Packing size	681*466*435mm	681*466*495mm	681*466*555mm
产品尺寸/Product dimensions	616*386*391mm	616*386*451mm	616*386*511mm
颜色/Color	拉丝银(可订制) Black and gray (customizable)		
净重/N.W 毛重/G.W	17.0/20.4Kg	18.0/21.5Kg	19.0/22.7Kg
制冷剂/Refrigerant	R134a/R600a	R134a/R600a	R134a/R600a
制冷范围/ Temperature interval of refrigeration	-20℃~20℃	-20℃~20℃	-20℃~20℃
最大温差/Maximum temperature difference	52℃	52℃	52℃
额定电压/Nominal voltage	DC 12V/24V	DC 12V/24V	DC 12V/24V
额定功率/Rated power	45W(±20%)	45W(±20%)	45W(±20%)
装柜量/FCL Quantity/20FT,40HQ	210/516	168/430	168/344

产品亮点/ Product Highlights



10分钟极速制冷
10 minutes of rapid cooling



超大数显数控面板
Ultra large LED display panel



感应照明+UV灭菌
Induction lighting + UV sterilization




超大存储容量
Ultra-large capacity

F005A/B/C Series 系列

OL-BCD20/25/30-F005A



BCD20-F005A/B/C




冷藏/冷冻区(Refrigerator/Freezer compartment)
L353*W288*D207(mm)

OL-BCD20/25/30-F005B



BCD25-F005A/B/C



冷藏/冷冻区(Refrigerator/Freezer compartment)
L352*W287*D2527(mm)

OL-BCD20/25/30-F005C




BCD30-F005A/B/C




冷藏/冷冻区(Refrigerator/Freezer compartment)
L352*W287*D297(mm)


A款 Series

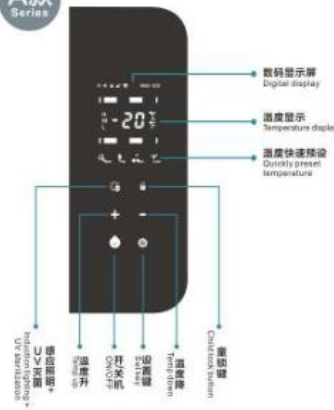

B款 Series

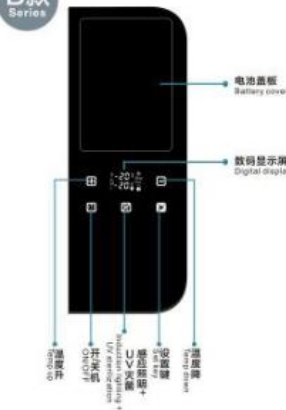

C款 Series

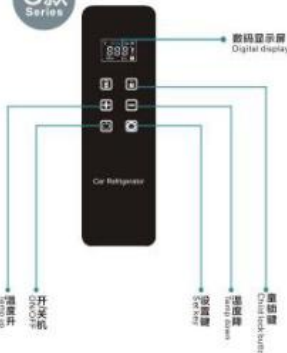

型号/Model	OL-BCD20-F005A/B/C	OL-BCD25-F005A/B/C	OL-BCD30-F005A/B/C
包装尺寸/Packing size	653*431*330mm	653*431*375mm	653*431*420mm
产品尺寸/Product dimensions	623*378*280mm	623*378*325mm	623*378*370mm
颜色/Color	黑灰 (可订制) Black and gray (customizable)		
净重/N.W 毛重/G.W	10.4/13Kg	11.2/13.9Kg	11.6/14.4Kg
制冷剂/Refrigerant	R134a/R600a	R134a/R600a	R134a/R600a
制冷范围/ Temperature interval of refrigeration	-20℃~20℃	-20℃~20℃	-20℃~20℃
最大温差/Maximum temperature difference	52℃	52℃	52℃
额定电压/Nominal voltage	DC 12V/24V	DC 12V/24V	DC 12V/24V
额定功率/Rated power	45W(±20%)	45W(±20%)	45W(±20%)
装柜量/FCL Quantity/20GP,40HQ	280/630	240/630	200/540

产品亮点/ Product Highlights



10分钟极速制冷
10 minutes of rapid cooling



微电脑控温, 冷冻保鲜
Microcomputer temperature control,
refrigeration and preservation




蓝牙APP远程操作
Bluetooth App control




便捷移动
Easy to carry



EF Series 系列



冷藏/冷冻区 (Refrigerator/Freezer compartment)
L205*W309*D184(mm)



冷藏/冷冻区 (Refrigerator/Freezer compartment)
L308*W204*D234(mm)

超长电池续航
Long battery working time



型号/Model	EF12	EF15
包装尺寸/Packing size	475*370*480mm	475*370*530mm
产品尺寸/Product dimensions	肩带 412*292*404mm 提手 459*292*561mm	肩带 412*292*454mm 提手 459*292*611mm
颜色/Color	黑白(可订制) Black and white (customizable)	
净重/N.W 毛重/G.W	7.9/10.0Kg	8.6/10.8Kg
制冷剂/Refrigerant	R134a/R600a	R134a/R600a
制冷范围/ Temperature interval of refrigeration	-20℃~20℃	-20℃~20℃
最大温差/Maximum temperature difference	52℃	52℃
额定电压/Nominal voltage	DC 12V/24V	DC 12V/24V
额定功率/Rated power	45W(±20%)	45W(±20%)
装柜量/FCL Quantity/20GP,40HQ	300/785	300/785

ED Series 系列




超长电池续航
Long battery working time

型号/Model		ED40-A	ED50-A	ED60-A
		ED40-C	ED50-C	ED60-C
包装尺寸/Packing size		775*525*535mm	775*525*585mm	775*525*650mm
产品尺寸/Product dimensions	ED-A →	674*409*466mm	674*409*516mm	674*409*583mm
	ED-C →	765*470*466mm	765*470*516mm	765*470*583mm
颜色/Color		黑白(可订制)	Black and white	(customizable)
净重/N.W 毛重/G.W	ED-A →	15.0/18.6Kg	16.0/19.4Kg	17.0/20.5Kg
	ED-C →	18.3/21.7Kg	18.8/22.5Kg	19.3/23.2Kg
制冷剂/Refrigerant		R134a/R600a	R134a/R600a	R134a/R600a
制冷范围/ Temperature interval of refrigeration		-20℃~20℃	-20℃~20℃	-20℃~20℃
最大温差/Maximum temperature difference		52℃	52℃	52℃
额定电压/Nominal voltage		DC 12V/24V	DC 12V/24V	DC 12V/24V
额定功率/Rated power		45W(±20%)	45W(±20%)	45W(±20%)
装柜量/FCL Quantity/20GP,40HQ		132/330	132/264	99/264

产品亮点/ Product Highlights


- 10分钟极速制冷
10 minutes of rapid cooling
- 双温双控
Double temperature zone design
- 蓝牙APP远程操作
Bluetooth App control
- 超大存储容量
Ultra-large capacity



冷冻/冷藏区(Freezer/Refrigerator compartment)
L312*W277*D355(mm)
冷冻/冷藏区(Freezer/Refrigerator compartment)
L312*W203*D185(mm)



冷冻/冷藏区(Freezer/Refrigerator compartment)
L312*W277*D405(mm)
冷冻/冷藏区(Freezer/Refrigerator compartment)
L312*W203*D235(mm)



冷冻/冷藏区(Freezer/Refrigerator compartment)
L312*W277*D475(mm)
冷冻/冷藏区(Freezer/Refrigerator compartment)
L312*W203*D300(mm)



ED40-A



ED50-C



产品亮点/ Product Highlights



10分钟极速制冷
10 minutes of rapid cooling



智能双温区设计
Double temperature zone design



感应照明，自动亮灯
Induction lamp



底部排水孔设计，防异味
Drain hole design



EC Series 系列

EC30




EC40



EC50




EC30



冷冻区/Freezer compartment
L268*W265*D286(mm)
冷藏区/Refrigerator compartment
L68*W265*D286(mm)
L145*W265*D98(mm)

EC40



冷冻区/Freezer compartment
L268*W265*D358(mm)
冷藏区/Refrigerator compartment
L68*W265*D358(mm)
L145*W265*D173(mm)

EC50



冷冻区/Freezer compartment
L268*W265*D428(mm)
冷藏区/Refrigerator compartment
L68*W265*D428(mm)
L145*W265*D240(mm)



型号/Model	EC30	EC40	EC50
包装尺寸/Packing size	655*410*445mm	655*410*515mm	655*410*585mm
产品尺寸/Product dimensions	595*349*371mm	595*349*441mm	595*349*511mm
颜色/Color	蓝白(可订制) Blue and white (customizable)		
净重/N.W 毛重/G.W	13.3/16.0Kg	14.3/17.0Kg	16.1/18.1Kg
制冷剂/Refrigerant	R134a/R600a	R134a/R600a	R134a/R600a
制冷范围/ Temperature interval of refrigeration	-20℃~20℃	-20℃~20℃	-20℃~20℃
最大温差/Maximum temperature difference	52℃	52℃	52℃
额定电压/Nominal voltage	DC 12V/24V	DC 12V/24V	DC 12V/24V
额定功率/Rated power	45W(±20%)	45W(±20%)	45W(±20%)
装柜量/FCL Quantity/20GP,40HQ	230/505	184/505	184/404

产品亮点/ Product Highlights

- **10分钟极速制冷**
10 minutes of rapid cooling
- **微电脑控温，冷冻保鲜**
Microcomputer temperature control, refrigeration and preservation
- **蓝牙APP远程操作**
Bluetooth App control
- **底部排水孔设计，防异味**
Drain hole design



EB Series EB系列



型号/Model	EB18	EB25
包装尺寸/Packing size	620*390*330mm	620*390*400mm
产品尺寸/Product dimensions	568*330*262mm	568*330*332mm
颜色/Color	黑白(可订制) Black and white (customizable)	
净重 /N.W 毛重/G.W	8.8/11Kg	10/12Kg
制冷剂/Refrigerant	R134a/R600a	R134a/R600a
制冷范围/ Temperature interval of refrigeration	-20℃~20℃	-20℃~20℃
最大温差/Maximum temperature difference	52℃	52℃
额定电压/Nominal voltage	DC 12V/24V	DC 12V/24V
额定功率/Rated power	45W(±20%)	45W(±20%)
装柜量/FCL Quantity/20GP,40HQ	378/912	270/684

产品亮点/ Product Highlights



10分钟极速制冷
10 minutes of rapid cooling



微电脑控温，冷冻保鲜
Microcomputer temperature control,
refrigeration and preservation



蓝牙APP远程操作
Bluetooth App control




底部排水孔设计，防异味
Drain hole design



EB-C Series 系列


EB18-C



冷藏/冷冻区 (Refrigerator/Freezer compartment)
L319*W246*D184(mm)



EB25-C



冷藏/冷冻区 (Refrigerator/Freezer compartment)
L318*W245*D254(mm)



数码显示屏
Digital display
童锁组合键
Child lock combination key
设置键
Set key
温度升
Temp up
温度降
Temp down
开关机
ON/OFF

型号/Model	EB18-C	EB25-C
包装尺寸/Packing size	620*390*330mm	620*390*400mm
产品尺寸/Product dimensions	568*330*279mm	568*330*349mm
颜色/Color	蓝白(可订制) Blue and white (customizable)	
净重/N.W 毛重/G.W	9.5/11Kg	10/11.5Kg
制冷剂/Refrigerant	R134a/R600a	R134a/R600a
制冷范围/ Temperature interval of refrigeration	-20℃~20℃	-20℃~20℃
最大温差/Maximum temperature difference	52℃	52℃
额定电压/Nominal voltage	DC 12V/24V	DC 12V/24V
额定功率/Rated power	45W(±20%)	45W(±20%)
装柜量/FCL Quantity/20FT,40HQ	378/912	270/684

产品亮点/ Product Highlights

- 

10分钟极速制冷
10 minutes of rapid cooling
- 

智能双温区设计
Double temperature zone design
- 

感应照明，自动亮灯
Induction lamp
- 

便携拉杆滑轮设计
Telescope handle and wheels help you move easily




EA Series
系列

EA35



EA35



冷冻区/Freezer compartment
L265*W258*D285(mm)

冷藏区/Refrigerator compartment
L65*W258*D285(mm)
L145*W258*D100(mm)

EA45-B



EA45




冷冻区/Freezer compartment
L265*W258*D355(mm)

冷藏区/Refrigerator compartment
L65*W258*D355(mm)
L145*W258*D170(mm)

EA55-C



EA55



冷冻区/Freezer compartment
L265*W258*D425(mm)

冷藏区/Refrigerator compartment
L65*W258*D425(mm)
L145*W258*D240(mm)

温度升
Temp up

童锁组合键
Child lock combination key

开/关机
ON/OFF



温度降
Temp down

数码显示屏
Digital display

设置键
Set key



普通款把手
Ordinary Handle

折叠款把手
Foldable handle

型号/Model	EA35/EA35-B EA35-C	EA45/EA45-B EA45-C	EA55/EA55-B EA55-C
包装尺寸/Packing size	710*445*455mm	710*445*525mm	710*445*600mm
产品尺寸/Product dimensions	EA/EA-B → 726*390*370mm EA-C → 691*390*370mm	726*390*440mm 691*390*440mm	726*390*510mm 691*390*510mm
颜色/Color	橙黑(可订制) Orange and black (customizable)		
净重/N.W	EA/EA-B → 13.2/15.6Kg EA-C → 13.4/16.5Kg	14.1/16.5Kg 14.1/17.3Kg	14.9/17.7Kg 15.3/18.7Kg
毛重/G.W			
制冷剂/Refrigerant	R134a/R600a	R134a/R600a	R134a/R600a
制冷范围/ Temperature interval of refrigeration	-20°C~20°C	-20°C~20°C	-20°C~20°C
最大温差/Maximum temperature difference	52°C	52°C	52°C
额定电压/Nominal voltage	DC 12V/24V	DC 12V/24V	DC 12V/24V
额定功率/Rated power	45W(±20%)	45W(±20%)	45W(±20%)
装柜量/FCL Quantity/20GP,40HQ	210/430	168/430	126/344

-Page 44-

商务定制改装冰箱 Custom refrigerator for business car



10分钟极速制冷

10 minutes of rapid cooling



微电脑控温，冷藏保鲜

Microcomputer temperature control, refrigeration and preservation



超低轻音

Ultra low noise



扶手箱嵌入

Embedded armrest refrigerator



EH4 半导体

型号/Model	EH4
包装尺寸/Packing size	258*208*305(mm)
产品尺寸/Product dimensions	250*196*285(mm)
颜色/Color	黑色(可订制) Black (customizable)
净重/N.W 毛重/G.W	2.0/2.5Kg
制冷制热方式/Cooling and heating method	半导体芯片12706
制热温差/ Heating temperature difference	最高 45℃ (±5℃)
制冷温差/Refrigeration temperature difference	低于环境温度20℃
额定电压/Nominal voltage	DC 12V
额定功率/Rated power	60W(±20%)
装柜量/FCL Quantity/40HQ	4500

商务定制改装冰箱 Custom refrigerator for business car



10分钟极速制冷

10 minutes of rapid cooling



压缩机制冷

Compressor refrigeration



超低轻音

Ultra low noise



扶手箱嵌入

Embedded armrest refrigerator



EH4-Y 压缩机

型号/Model	EH4-Y
包装尺寸/Packing size	405*208*305(mm)
产品尺寸/Product dimensions	387*196*285(mm)
颜色/Color	黑色(可订制) Black (customizable)
净重/N.W 毛重/G.W	5.3/5.8Kg
制冷剂/Refrigerant	R134a/R600a
制冷范围/ Temperature interval of refrigeration	-20℃~20℃
最大温差/Maximum temperature difference	52℃
额定电压/Nominal voltage	DC 12V/24V
额定功率/Rated power	45W(±20%)
装柜量/FCL Quantity/40HQ	2700

卡车车载冰箱 Truck refrigerator

- 

10分钟极速制冷

10 minutes of rapid cooling
- 

压缩机制冷


Compressor refrigeration
- 

压缩机自带平衡功能 (≤45°)

The compressor has its own balancing function (≤45°)
- 

超低轻音

Ultra low noise

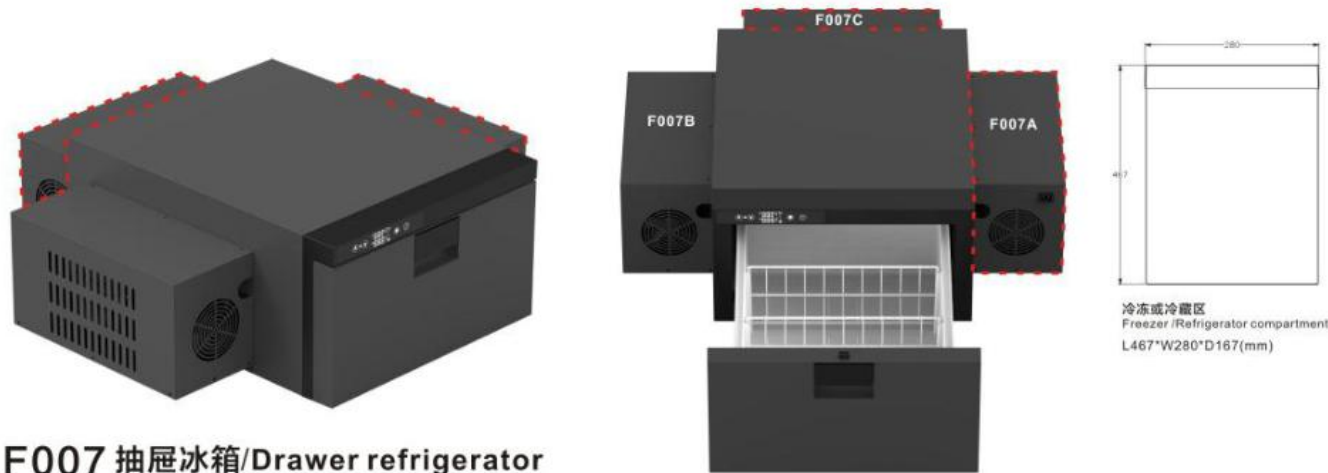

F007 抽屉冰箱/Drawer refrigerator

适用车型：东风天龙，解放鹰途，中国重汽等车型
Applicable models: Dongfeng-kinland, Jiefang Yitu, China National Heavy Duty Truck, etc.

型号/Model		F007A/B/C
包装尺寸/Packing size	F007A/B 压缩机在左或在右 Compressor on the left or right	665*625*330(mm)
	F007C 压缩机在后 Compressor behind	785*505*330(mm)
产品尺寸/Product dimensions	F007A/B 压缩机在左或在右 Compressor on the left or right	598*561*267(mm)
	F007C 压缩机在后 Compressor behind	720*440*267(mm)
颜色/Color		黑色(可订制) Black (customizable)
净重/N.W	毛重/G.W	17/19.3Kg
制冷剂/Refrigerant		R134a/R600a
制冷范围/ Temperature interval of refrigeration		-20℃~20℃
最大温差/Maximum temperature difference		39℃
额定电压/Nominal voltage		DC 12V/24V
额定功率/Rated power		45W
装柜量/FCL Quantity/40HQ		456/544



储能电源 Energy storage power supply



欧规 /European standard

美规和日规 /American Standard and Japanese Standard

DW300

裸机产品尺寸/Product size (mm) : 220*130*200mm

单个彩盒包装尺寸/Individual packaging size (mm) : 255*210*235mm

包装尺寸/Packing size (mm) : 425*265*490mm(4个装)

裸机重量/Product net weight (kg) : 3kg

单个彩盒包装重量/Individual packaging weight (kg) : 3.7kg

外箱包装重量/The total weight of the package (kg) : 15.8kg

产品特点 Product features

- 1 便携式移动储能, 整合太阳能MPPT充电, DC, AC输出, LED照明, 逆变功能;
Portable mobile energy storage, integrated solar MPPT charging, DC, AC output, LED lighting, inverter function.
- 2 90000mAh /333WH高容量高倍率充放电锂电;
90000mAh /333WH high capacity and high rate charging and discharging lithium battery.
- 3 1个美规输出接口120V或一个英规、欧规接口230V可选。正弦波输出, 最大峰值功率600W 额定功率300W;
1 U.S. output interface 120V or a British, European standard interface 230V optional. Sine wave output, maximum peak power 600W Rated power 300W.
- 4 LCD显示屏, 直观显示工作状态, 简单明了;
LCD display, visual display of working status, simple and clear.
- 5 高亮LED照明;
High brightness LED lighting
- 6 1个点烟器座输出;
1 cigarette lighter holder output.
- 7 4USB输出功能, 无负载30秒自动关机;
4USB output function, no load, automatic shutdown in 30 seconds.
- 8 高效太阳能MPPT充电管理;
High efficiency solar MPPT charging management.
- 9 DC13~20V充电输入, 标准充电和快充模式;
DC13~20V charging input, standard charging and fast charging modes.
- 10 过载、过压、过流、过温、短路保护、电池过充、欠压。
Overload, overvoltage, overcurrent, overtemperature, short-circuit protection, battery overcharge, undervoltage.



欧规 /European standard

美规和日规 /American Standard and Japanese Standard

DW600

裸机产品尺寸/Product size (mm) : 260*160*210mm

单个彩盒包装尺寸/Individual packaging size (mm) : 275*230*240mm

包装尺寸/Packing size (mm) : 490*290*270mm(2个装)

裸机重量/Product net weight (kg) : 4.75kg

单个彩盒包装重量/Individual packaging weight (kg) : 5.6kg

外箱包装重量/The total weight of the package (kg) : 11.85kg

产品特点 Product features

- 1 便携式移动储能, 整合太阳能MPPT充电, DC, AC输出, LED照明, 逆变功能;
Portable mobile energy storage, integrated solar MPPT charging, DC, AC output, LED lighting, inverter function.
- 2 150000mAh /555WH高容量高倍率充放电锂电;
150000mAh /555WH high capacity and high rate charging and discharging lithium battery.
- 3 2个美规输出接口110V或2个欧规、韩规、1个英规接口220V可选。正弦波输出, 最大峰值功率1200W 额定功率600W;
2 U.S. output interface 110V or 2 European standard, Korean standard, 1 British standard interface 220V optional. Sine wave output, maximum peak power 1200W Rated power 600W.
- 4 LCD显示屏, 直观显示工作状态, 简单明了;
LCD display, visual display of working status, simple and clear.
- 5 1个点烟器座输出;
1 cigarette lighter holder output.
- 6 1 TYPE-C 100W同进同出;
1 TYPE-C 100W same in and out.
- 7 4USB输出功能, 无负载30秒自动关机;
4USB output function, no load, automatic shutdown in 30 seconds.
- 8 高效太阳能MPPT充电管理分别DC 5.5*2.1 18V建议100W, 安德森36V 建议300~400W;
High efficiency solar MPPT charge management respectively DC 5.5*2.1 18V suggest 100W, Anderson 36V suggest 300~400W.
- 9 DC12~24V充电输入标准充电和安德森25.2V恒流快充模式;
DC12~24V charging input standard charging and Anderson 25.2V constant current fast charging mode.
- 10 过载、过压、过流、过温、短路保护、电池过充、欠压。
Overload, overvoltage, overcurrent, overtemperature, short-circuit protection, battery overcharge, undervoltage.

产品展示 Product Show



多个端口 MULTIPLE PORTS

AC/DC/USB/CIG输出端口, 满足各种电源需求。

AC/DC/USB/CIG output port, meet a variety of power needs



太阳能板 Solar panels



MD-100W 单晶

展开尺寸/Product expanded size:1190*530mm*17mm
闭合尺寸/Product folded size: 595*530*35mm
净重/Net weight: 4.4KG
开路/Open circuit: 21.6V (Not less than: 44.18V)
短路电流/Short circuit current: 6.66A (Not less than: 10.26A)
工作电压/Operating Voltage: 18V (Not less than: 35.63V)
工作电流/Working current: 5.55A (Not less than:8.74A)
最大功率/Maximum power: 100W

产品特点 Product features

- 1 采用高性能单晶硅，光能转换率高达22%；
The use of high-performance monocrystalline silicon with a photovoltaic energy conversion rate of 22%.

2 防折、防摔、防踩踏；
Anti-folding, anti-falling and anti-stepping.

3 感光度，阴雨天气照样发电；
High sensitivity, power generation in rainy weather.

4 一体成型，新型抗氧化科技材料；
One-piece molding, new antioxidant technology material.

5 稳定放置，自带支架设计；
Stable placement, self-supporting design.
- 6 可折叠面板，单手可轻松提起；
Foldable panel, can be easily lifted with one hand.

7 防水、耐腐蚀、耐高温；
Waterproof, corrosion resistant, high temperature resistant.

8 兼容多种不同储能电源充电。
Compatible with a variety of different energy storage power charging.

产品细节 Product Details



展开太阳能板面图/Expanded solar panel surface view



自带支架设计稳定方便
Self-supporting design is stable and convenient



输出接口/Output Interface

产品展示 Product Show



配件

Accessories

■ 标准配件


Standard Accessories



适配器
Adapter



点烟线
DC cigarette lighter



说明书
Use Manual

■ 可选配件

Optional Accessories



可拆卸电池
Lithium battery



蓝牙APP
Bluetooth App



压缩机品牌
Compressor Brand



储能电源
Energy storage power supply



太阳能板
Solar panels