

Tripcool®

Professional outdoor refrigerator brand

ICEBERG



**泰国艾斯伯格电器有限公司**  
THAILAND ICEBERG ELECTRONIC APPLIANCE CO.,LTD.

Thailand Add:Thai-Chinese Rayong Industrial Zone  
Tel:0086-0574-62357788 Fax:0086-574-62150900  
Mob:0086-15968452888 E-mail:jack@minifridge.cn  
Web:www.cniceberg.com Http://minifridge.en.alibaba.com



**ICEBERG**  
艾斯伯格

ICEBERG



**宁波艾斯伯格电器有限公司**  
NINGBO ICEBERG ELECTRONIC APPLIANCE CO., LTD.

China Add:No.25 Weisi Road(East Section),Simen Town,Yuyao City,Ningbo,Zhejiang Province,China 315470  
Tel:0086-0574-62357788 Fax:0086-574-62150900  
Mob:0086-15968452888 E-mail:jack@minifridge.cn  
Web:www.cniceberg.com Http://minifridge.en.alibaba.com





NINGBO ICEBERG ELECTRONIC APPLIANCE CO.,LTD.

# ABOUT US



NINGBO ICEBERG ELECTRONIC APPLIANCE CO.,LTD. is a company that integrates design, research and development, and production of mini refrigerators, beauty refrigerators, outdoor car refrigerators, cooler boxes, and ice makers.

The company was founded in 2015 and currently has over 500 employees, including 17 R&D engineers, 8 production management personnel, and 25 sales personnel.

The factory covers an area of 40,000 square meters and has 16 professional production lines, with an annual production output of 2,600,000 pieces and the annual output value exceeds 50 Million USD.

The company has always adhered to the concept of "innovation, quality and service". Our products have been widely recognized and trusted by customers from all over the world, especially in countries and regions such as the European Union, the United States, Japan, South Korea, Australia, etc. Our products occupy a high market share and high praise.

The company has been certificated by BSCI,IATF16949, ISO 9001 and ISO14001 and products have obtained certification for major markets such as CCC, CB, CE, GS, RoHS, ETL, SAA, LFGB, etc. We have more than 20 patents approved and used in our products.

We believe that you have a preliminary understanding of our company, and we firmly believe that you will have a strong interest in our products and services. Therefore, starting from this catalog, we will establish a strong partnership and achieve win-win results.

## WORKSHOP






THAILAND ICEBERG ELECTRONIC APPLIANCE CO.,LTD

# ABOUT US




THAILAND ICEBERG ELECTRONIC APPLIANCE CO.,LTD is a company of Thai origin established by NINGBO ICEBERG ELECTRONIC APPLIANCE CO.,LTD. which is a company integrating outdoor refrigerator design, research and development, and production. The company was established in 2025 and the factory covers an area of 5000 square meters. The company always adheres to the concept of “Innovation, Quality, Service”, and its products have been widely recognized and trusted by customers worldwide. The company has the certificate of origin of Thailand. We believe you have already had a preliminary understanding of our company, and we are confident that you will be interested in our products and services.






CATALOGUE


NINGBO ICEBERG ELECTRONIC APPLIANCE CO.,LTD.

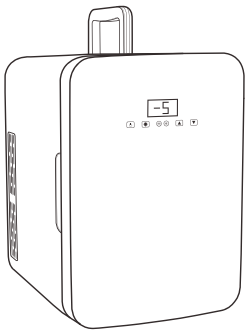


MINI FRIDGE

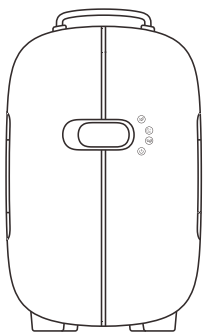


COSMETIC FRIDGE

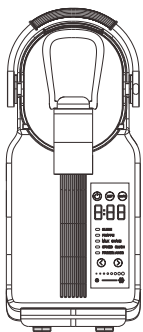


SLUSH MACHINE



COOLER BOX



COMPRESSOR FRIDGE



ICE MAKER

1 CATALOGUE  
ABOUT US  
P1-P6

2 ICE MAKER  
SLUSH MACHINE  
P7-P10

3 COSMETIC  
FRIDGE  
P11-P20

4 MINI FRIDGE  
P21-P43

5 COMPRESSOR  
FRIDGE  
P44-P71

6 CAMPING  
COOLER BOX  
P72-P94

7 CERTIFICATE  
P95-P96





ICE MAKER / SLUSH MACHINE  
APPLY TO

DAILY LIFE, PARTIES, OUTDOOR CAMPING  
BUSINESS SETTINGS



IBN15

NUGGET ICE MAKER

- 1.Ice Shape:Nugget
- 2.Ice Making Capacity:12kg/24H
- 3.Ice bin storage capacity:0.55 kg

Product Size:180x320x333(mm)

N.W.(KGS):10KG

6A Loading Qty (No Carton):954/1944/2268



IBB10

BULLET ICE MAKER

- 1.Ice Shape:Bullet
- 2.Ice Cubes Each Cycle:6 Pcs
- 3.Ice bin storage capacity:0.45 kg

Product Size:180x285x333(mm)

N.W.(KGS):6.5KG

6A Loading Qty (No Carton):1113/2268/2592





# ICE MAKER / SLUSH MACHINE APPLY TO

DAILY LIFE, PARTIES, OUTDOOR CAMPING  
BUSINESS SETTINGS



## IBB12

BULLET ICE MAKER

- 1.Ice Shape:Bullet
- 2.Ice Making Capacity:12kg/24H
- 3.Ice bin storage capacity:0.58 kg

Product Size:205x2269x282(mm)

N.W.(KGS):6.8KG

6A Loading Qty (No Carton):1128/2258/2700



## IBS20

Single-Chamber Shaved Ice Machine

- 1.Ice Shape:Slushi
- 2.Ice Making Capacity:≤50min (620z)
- 3.Slushi storage capacity:>620z(Max) / >160z(Min)
- 4.Refrigeration system:Compressor air cooling

Product Size:165x398x443(mm)

N.W.(KGS):10.5KG

6A Loading Qty (No Carton):608/1288/1478





COSMETIC FRIDGE  
APPLY TO

COSMETICS, BEAUTY / SKINCARE PRODUCTS



COOLING  
10-18℃  
TA: 25℃




MFA-12L-B

THERMOELECTRIC COOLER

- 1.Voltage:AC 100V-240V (with an adapter)
- 2.Volume:12 Litre
- 3.Power consumption:45W±10%

|                                |                                 |
|--------------------------------|---------------------------------|
| Inner Box Size:310*293*485(mm) | Carton Size:320*305*500(mm)     |
| PACKING:1PC/Inner Box 1PC/CTN  |                                 |
| N.W./G.W(KGS):4.8/6.5KG        | QTY/20*/40*/40*HC:570/1200/1350 |

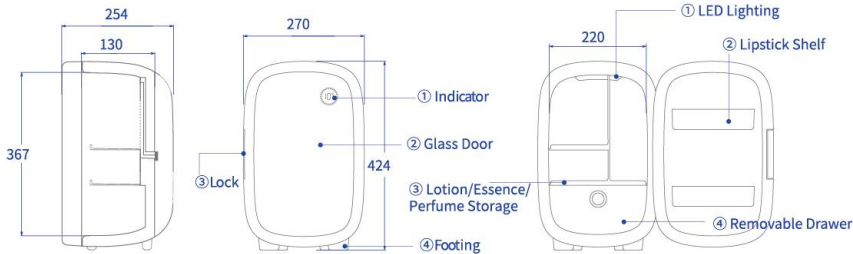

COOLING  
10-18℃  
TA: 25℃




MFA-12L-C

THERMOELECTRIC COOLER

- 1.Voltage:AC 100V-240V (with an adapter)
- 2.Volume:12 Litre
- 3.Power consumption:45W±10%

|                                |                                 |
|--------------------------------|---------------------------------|
| Inner Box Size:310*293*485(mm) | Carton Size:320*305*500(mm)     |
| PACKING:1PC/Inner Box 1PC/CTN  |                                 |
| N.W./G.W(KGS):4.8/6.5KG        | QTY/20*/40*/40*HC:570/1200/1350 |

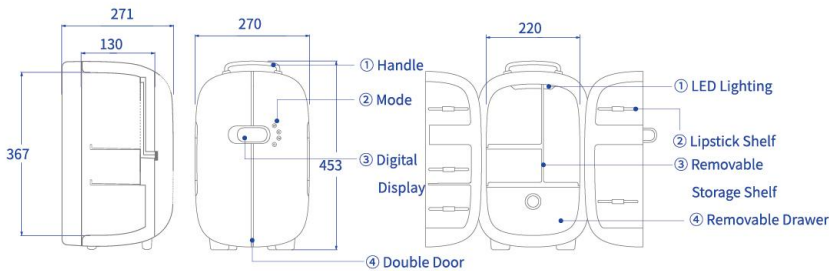




COSMETIC FRIDGE  
APPLY TO

COSMETICS, BEAUTY / SKINCARE PRODUCTS



COOLING  
10-18℃  
TA: 25℃

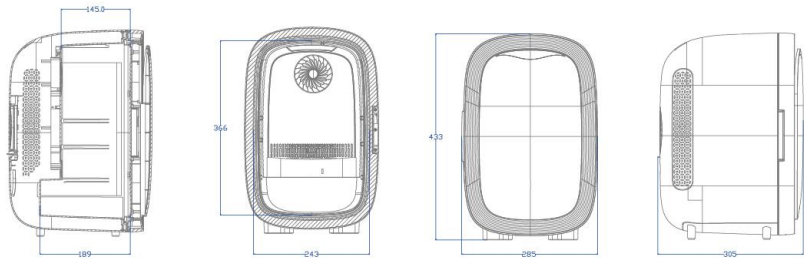

MFA-12L-M


THERMOELECTRIC COOLER

- 1.Voltage:AC 100-240V
- 2.Volume:12 Litre
- 3.Power consumption:50W±10%
- 4.Mask heating function on the door

|                                |                                      |
|--------------------------------|--------------------------------------|
| Inner Box Size:335x315x482(mm) | Carton Size:345x325x500(mm)          |
| PACKING:1PC/Inner Box 1PCS/CTN |                                      |
| N.W/G.W(KGS):5.2/6.0           | QTY/20"/40"/40"HC(PCS):500/1050/1240 |



COOLING  
10-18℃  
TA: 25℃

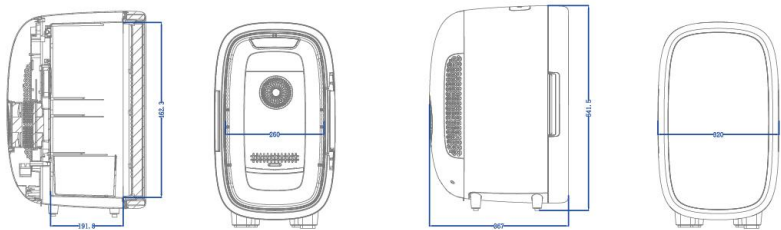

HZD-25L-A

THERMOELECTRIC COOLER

- 1.Voltage:AC 100-240V
- 2.Volume:25 Litre
- 3.Power consumption:50W±10%

|                                |                                    |
|--------------------------------|------------------------------------|
| Inner Box Size:413x363x610(mm) | Carton Size:425x380x620(mm)        |
| PACKING:1PC/Inner Box 1PCS/CTN |                                    |
| N.W/G.W(KGS):7.5/9.5           | QTY/20"/40"/40"HC(PCS):300/600/700 |





COOLING

10-18℃

TA: 25℃




# MFA-5L-F

## THERMOELECTRIC COOLER

- 1.Voltage:AC 100V-240V
- 2.Volume:5 Litre
- 3.Power consumption:38W±10%

|                                |                                 |
|--------------------------------|---------------------------------|
| Inner Box Size:368*255*353(mm) | Carton Size:380*270*370(mm)     |
| PACKING:1PC/Inner Box 1PC/CTN  |                                 |
| N.W./G.W.(KGS):4.0/5.4KG       | QTY/20*/40*/40*HC:700/1480/1760 |

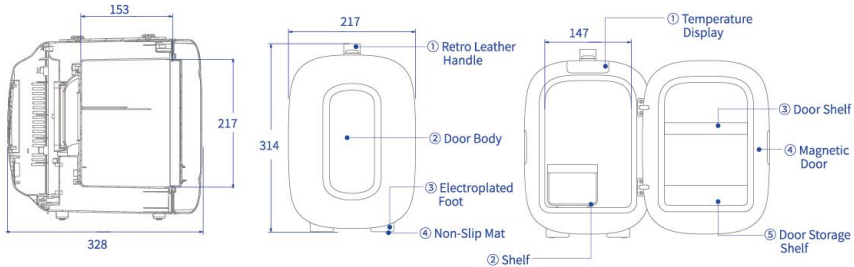

COOLING

10-14℃

TA: 25℃




# CBA-9L

## THERMOELECTRIC COOLER

- 1.Voltage:AC 100V-240V
- 2.Volume:9 Litre
- 3.Power consumption:20W±10%

|                                |                                 |
|--------------------------------|---------------------------------|
| Inner Box Size:433*340*260(mm) | Carton Size:455*355*275(mm)     |
| PACKING:1PC/Inner Box 1PC/CTN  |                                 |
| N.W./G.W.(KGS):4.7/5.5KG       | QTY/20*/40*/40*HC:650/1300/1490 |

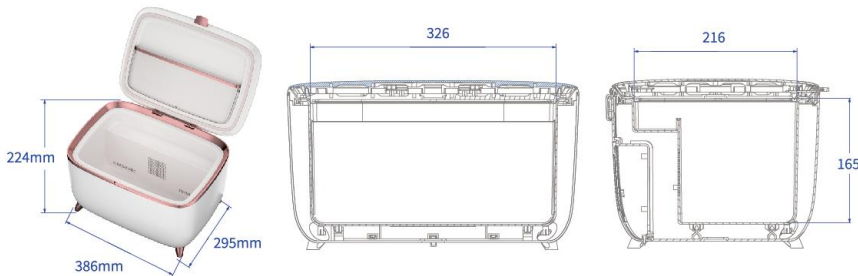

HEATING

45-65℃

COOLING

3-5℃

TA: 25℃




# MFA-5L-N

## THERMOELECTRIC COOLER AND WARMER

- 1.Voltage:DC 12V and AC 220V-240V or AC100-120V
- 2.Volume:4 Litre
- 3.Power consumption:35W±10%

|                                |                                  |
|--------------------------------|----------------------------------|
| Inner Box Size:273*195*290(mm) | Carton Size:405*290*595(mm)      |
| PACKING:1PC/Inner Box 4PCS/CTN |                                  |
| N.W./G.W.(KGS):8.0/10.0        | QTY/20*/40*/40*HC:1600/3200/3900 |

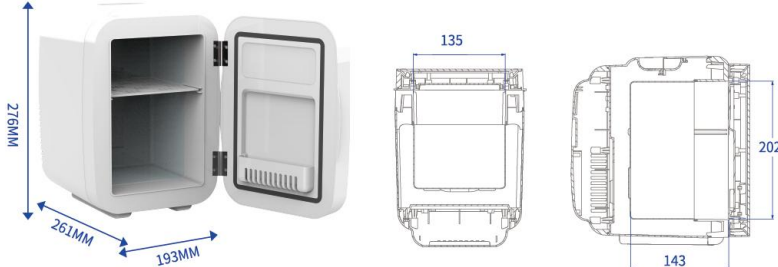

HEATING

45-65℃

COOLING

3-5℃

TA: 25℃




# MFA-5L-P

## THERMOELECTRIC COOLER AND WARMER

- 1.Voltage:DC 12V and AC 220V-240V or AC100-120V
- 2.Volume:4 Litre
- 3.Power consumption:35W±10%

|                                 |                                  |
|---------------------------------|----------------------------------|
| Inner Box Size:273*195*290 (mm) | Carton Size:405*290*595(mm)      |
| PACKING:1PC/Inner Box 4PCS/CTN  |                                  |
| N.W./G.W.(KGS):8.0/10.0         | QTY/20*/40*/40*HC:1600/3200/3900 |

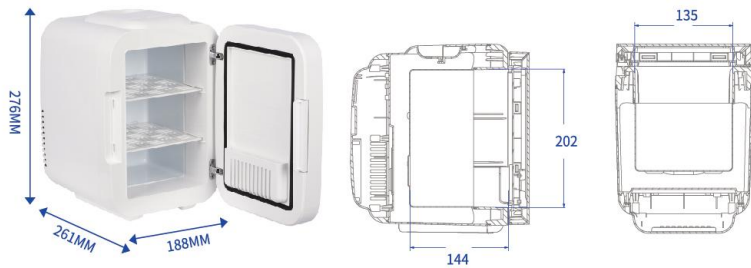




HEATING 45-65℃  
COOLING 3-5℃  
TA: 25℃



MFA-5L-S  
THERMOELECTRIC COOLER AND WARMER

- 1.Voltage:DC 12V and AC 220V-240V or AC100-120V
- 2.Volume:4 Litre
- 3.Power consumption:35W±10%

|                                |                                       |
|--------------------------------|---------------------------------------|
| Inner Box Size:300*198*285(mm) | Carton Size:585*420*320(mm)           |
| PACKING:1PC/Inner Box 4PCS/CTN |                                       |
| N.W/G.W.(KGS):8.0/10.0         | QTY/20"/40"/40*HC(PCS):1400/2950/3450 |

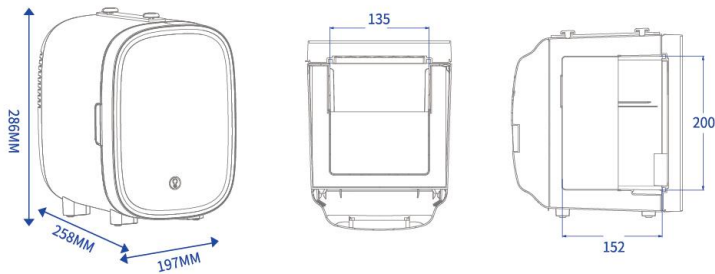

HEATING 50-65℃  
COOLING 3-5℃  
TA: 25℃



MFA-6L-G  
THERMOELECTRIC COOLER AND WARMER

- 1.Voltage:DC 12V and AC 220V-240V or AC100-120V
- 2.Volume:6 Litre
- 3.Power consumption:48W±10%

|                                |                                      |
|--------------------------------|--------------------------------------|
| Inner Box Size:341*243*349(mm) | Carton Size:350*490*700(mm)          |
| PACKING:1PC/Inner Box 4PCS/CTN |                                      |
| N.W/G.W.(KGS):11/15            | QTY/20"/40"/40*HC(PCS):850/1750/2050 |




COOLING 6-8℃  
TA: 25℃



CBA-6L-I  
THERMOELECTRIC COOLER

- 1.Voltage:AC 100-240V(with an adapter)
- 2.Volume:6 Litre
- 3.Power consumption:20W±10%

|                                |                                       |
|--------------------------------|---------------------------------------|
| Inner Box Size:374*252*218(mm) | Carton Size:525*390*460(mm)           |
| PACKING:1PC/Inner Box 4PCS/CTN |                                       |
| N.W/G.W.(KGS):9/11.5           | QTY/20"/40"/40*HC(PCS):1100/2400/2700 |

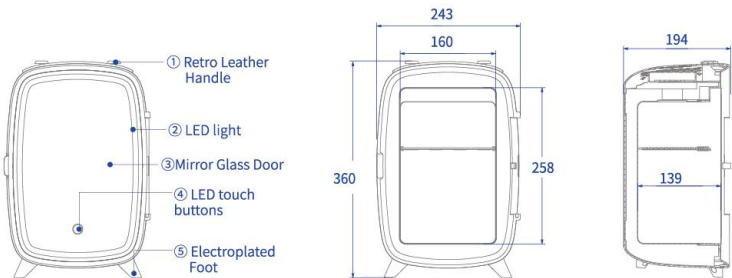


HEATING 40-50℃  
COOLING 5-8℃  
TA: 25℃



MFA-10L-I  
THERMOELECTRIC COOLER AND WARMER

- 1.Voltage:DC 12V and AC 220-240V or AC 100-120V
- 2.Volume:10 Litre
- 3.Power consumption:48W±10%

|                                |                                      |
|--------------------------------|--------------------------------------|
| Inner Box Size:326*280*379(mm) | Carton Size:575*340*395(mm)          |
| PACKING:1PC/Inner Box 2PCS/CTN |                                      |
| N.W/G.W.(KGS):7.1/9.8          | QTY/20"/40"/40*HC(PCS):760/1500/1800 |

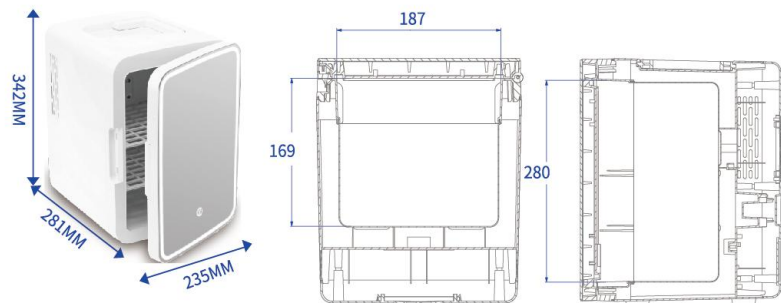



HEATING  
45-65℃

COOLING  
3-5℃

TA: 25℃

NEW



1.Voltage:DC 12V and AC 220V-240V or AC100-120V

2.Volume:6 Litre

3.Power consumption:35W±10%

4.With Glass surface

|                                 |                                  |
|---------------------------------|----------------------------------|
| Inner Box Size: 315*196*355(mm) | Carton Size:365*325*412(mm)      |
| Inner Size: 162*137*266(mm)     | PACKING:1PC/Inner Box 2PCS/CTN   |
| N.W./G.W(KGS):7.0/9.0KG         | QTY/20*/40*/40*HC:1200/2600/2900 |

324MM

274MM


190MM



266


137

162



137

162







HEATING  
45-65℃

COOLING  
3-5℃

TA: 25℃

NEW



1.Voltage:DC 12V and AC 220V-240V or AC100-120V

2.Volume:6 Litre

3.Power consumption:35W±10%

|                                 |                                  |
|---------------------------------|----------------------------------|
| Inner Box Size: 315*196*355(mm) | Carton Size:365*325*412(mm)      |
| Inner Size: 162*137*266(mm)     | PACKING:1PC/Inner Box 2PCS/CTN   |
| N.W./G.W(KGS):6.0/8.0KG         | QTY/20*/40*/40*HC:1200/2600/2900 |

324MM

274MM


190MM



266


137

162



137

162







COOLING  
9-11℃

TA: 25℃

NEW



1.Voltage: AC 220V-240V or AC100-120V

2.Volume:5 Litre

3.Power consumption:38W±10%

|                              |                                  |
|------------------------------|----------------------------------|
| Carton Size: 378*248*295(mm) |                                  |
| PACKING:1PC/CTN              |                                  |
| N.W./G.W(KGS):2.3/3KG        | QTY/20*/40*/40*HC:1149/2263/2608 |

243MM

215MM

341MM




143

150

90


148



247

254

252







HEATING  
45-65℃

COOLING  
3-5℃

TA: 25℃

NEW



1.Voltage:DC 12V and AC 220V-240V or AC100-120V

2.Volume:6 Litre

3.Power consumption:35W±10%

|                                 |                                  |
|---------------------------------|----------------------------------|
| Inner Box Size: 315*196*355(mm) | Carton Size: 365*325*412(mm)     |
| Inner Size: 162*137*266(mm)     | PACKING:1PC/Inner Box 2PCS/CTN   |
| N.W./G.W(KGS): 7.0/9.0KG        | QTY/20*/40*/40*HC:1200/2600/2900 |

324MM

274MM


190MM



266


137

162



137

162







ISO BSCI ROHS CCC CE ETL PS UK FDA

ISO BSCI ROHS CCC CE ETL PS UK FDA

19

20



# MINI FRIDGE APPLY TO

CAR, HOME, HOTEL, BAR, OFFICE, COSMETIC







COOLING  
2-28°C  
TA: 32°C





## ICE M100


Intelligent lock temperature box (Insulin portable box)

- 1.Capacity: Insulin injection pen + 3 needles
- 2.Built-in lithium battery: 3.7V 200mAh
- 3.Battery life: ≈30 days
- 4.Rated input: 5V 1A
- 5.Temperature range: 2-28°C
- 6.Temperature alarm: Sound and light alarm
- 7.Housing material: PU+ABS
- 8.Spare parts: PU leather flip cover, USB cable

|                            |                                          |
|----------------------------|------------------------------------------|
| Item size: 190x38.7x70(mm) | Carton Size:540x465x380(mm)              |
| Inner box: 226x131x72(mm)  | PACKING:1PC/Box 40 Boxes/CTN             |
| N.W(KGS):200g±10%          | QTY/20"/40"/40"HC(PCS):10800/24400/28400 |

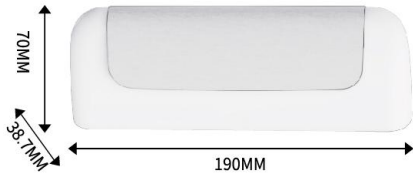


1 Injection pen\*



3 Needles\*



COOLING  
2-8°C  
TA: 32°C

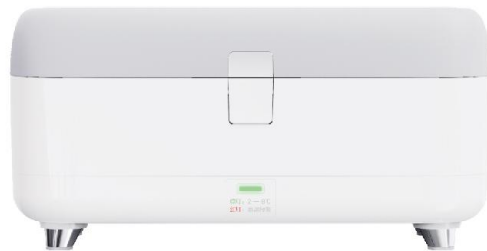

## ICE S100


Intelligent cooler box (Insulin cooler box)

- 1.Capacity: 8 drugs
- 2.Max cooling temperature range: 28°C±2°C
- 3.Rated voltage power: 26W
- 4.Power supply: 9V 3A adapter
- 5.Lowest temperature inside the box: 2 °C ± 1 °C
- 6.Alarm mode: Sound and light alarm
- 7.Housing material: Aluminium + ABS
- 8.Spare parts: Adapter, travelling bag

|                            |                                       |
|----------------------------|---------------------------------------|
| Item size: 216x114x107(mm) | Carton Size:610x545x570(mm)           |
| Inner box: 264x196x184(mm) | PACKING:1PC/Box 18 Boxes/CTN          |
| N.W(KGS):900g±10%          | QTY/20"/40"/40"HC(PCS):2520/5580/6480 |



TRAVELLING BAG



8 Drugs\*





COOLING  
5-8℃

TA: 25℃



# MINI FRIDGE MFA-0.5L

PRODUCT NAME AND TECHNICAL FEATURES

- 1.Voltage:DC 5V with USB cord AC 100V-240V with an adapter
- 2.Volume:0.5 Litre
- 3.Power consumption:48W±10%

|                                 |                                        |
|---------------------------------|----------------------------------------|
| Inner Box Size:140*140*215(mm)  | Carton Size:730*300*450(mm)            |
| PACKING:1PC/Inner Box 20PCS/CTN |                                        |
| N.W/G.W.(KGS):8/10              | QTY/20*/40*/40*HC(PCS)5800/12000/14000 |

 **1 CANS\***  
330ml Cola

COOLING  
2-18℃

TA: 25℃



# MFA-I-01 THERMOELECTRIC INSULIN CASE

- 1.Voltage:DC 5V,USB Cord AC 100-240V with AC Plug
- 2.Volume:6 insulin
- 3.2-18℃ set temperature

|                                |                                      |
|--------------------------------|--------------------------------------|
| Inner Box Size:330*130*155(mm) | Carton Size:350*290*660(mm)          |
| PACKING:1PC/Inner Box 9PCS/CTN |                                      |
| N.W/G.W.(KGS):10.4/14.4        | QTY/20*/40*/40*HC(PCS)3700/7700/9000 |

 **6 INSULIN\***



COOLING  
5-8℃


TA: 25℃



# MFA-2.5L THERMOELECTRIC COOLER

- 1.Voltage:AC 100-240V
- 2.Volume:2.5 Litre
- 3.Power consumption:48W±10%

|                                |                                      |
|--------------------------------|--------------------------------------|
| Inner Box Size:263*256*172(mm) | Carton Size:511*359*241(mm)          |
| PACKING:1PC/Inner Box 4PCS/CTN |                                      |
| N.W/G.W.(KGS):10/12            | QTY/20*/40*/40*HC(PCS)2100/4300/5000 |

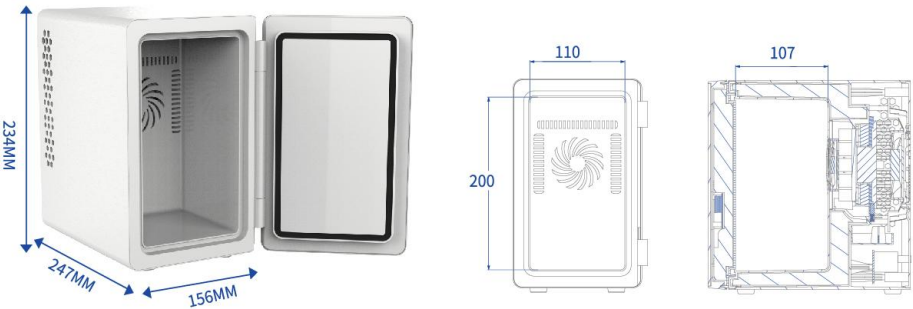

COOLING  
3℃

TA: 20℃




# MFA-3.5L-GA KITCHEN GARBAGE COOLER

- 1.Voltage:AC 100-240V(with an adapter)
- 2.Volume:3.5 Litre
- 3.Power consumption:20W±10%

|                                |                                      |
|--------------------------------|--------------------------------------|
| Inner Box Size:238*238*303(mm) | Carton Size:250*250*320(mm)          |
| PACKING:1PC/Inner Box 1PCS/CTN |                                      |
| N.W/G.W.(KGS):1.9/2.3          | QTY/20*/40*/40*HC(PCS)1300/2850/3200 |

 **4 BOTTLES\***  
380ml Water

 **4 CANS\***  
330ml Cola

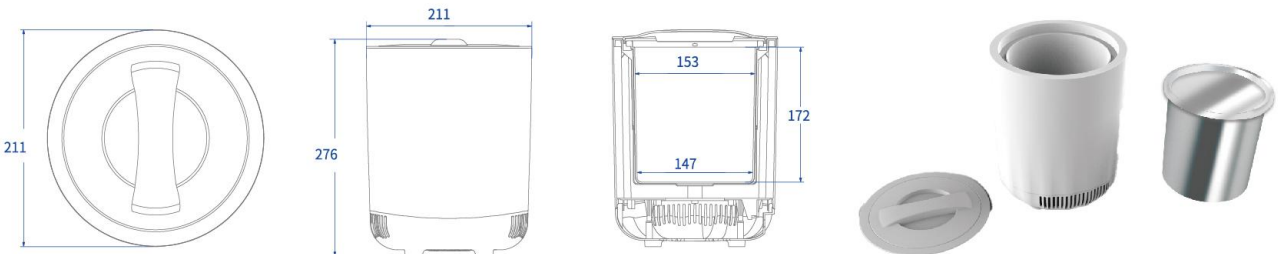



HEATING  
45-65°C  
COOLING  
5-8°C  
TA: 25°C



MFA-5L  
THERMOELECTRIC COOLER AND WARMER  
1.Voltage:AC 220-240V or AC 100-120V and USB  
2.Volume:4 Litre  
3.Power consumption:24W±10%


|                                |                                       |
|--------------------------------|---------------------------------------|
| Inner Box Size:273*194*290(mm) | Carton Size:405*290*595(mm)           |
| PACKING:1PC/Inner Box 4PCS/CTN |                                       |
| N.W/G.W.(KGS):7.5/9.2          | QTY/20*/40*/40*HC(PCS):1500/3200/3900 |



4 BOTTLES\*  
380ml Water



6 CANS\*  
330ml Cola

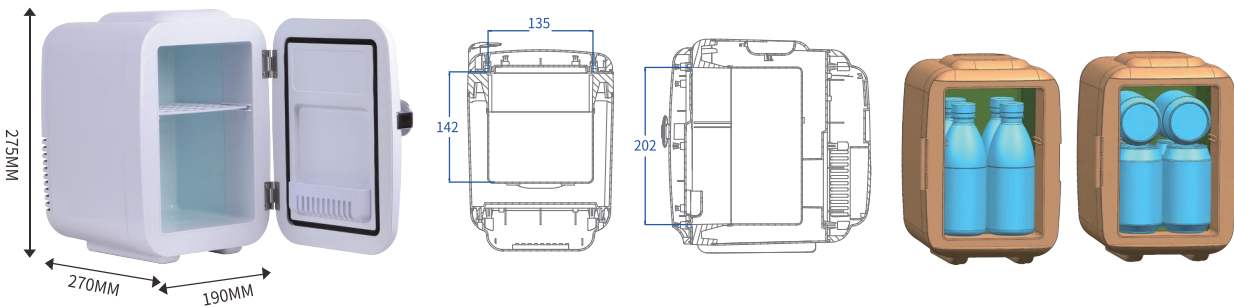

HEATING  
45-65°C  
COOLING  
5-8°C  
TA: 25°C



MFP-5L-I  
THERMOELECTRIC COOLER  
1.Voltage:AC 220-240V or AC 100-120V and DC  
2.Volume:4 Litre  
3.Power consumption:24W±10%


|                                |                                       |
|--------------------------------|---------------------------------------|
| Inner Box Size:274*196*277(mm) | Carton Size:405*290*575(mm)           |
| PACKING:1PC/Inner Box 4PCS/CTN |                                       |
| N.W/G.W.(KGS):7/10             | QTY/20*/40*/40*HC(PCS):1500/3200/3900 |



4 BOTTLES\*  
380ml Water



6 CANS\*  
330ml Cola

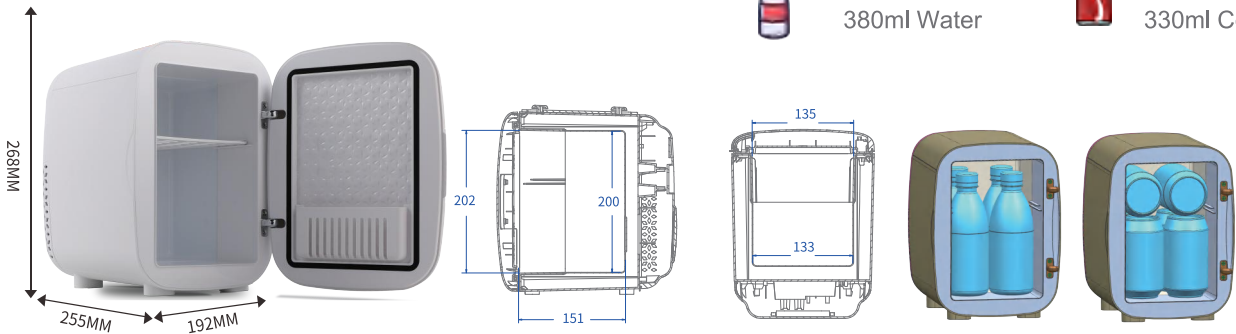

COOLING  
8-10°C  
TA: 25°C (no load)



MFP-5LL-A1  
THERMOELECTRIC COOLER  
1.Voltage:AC 220-240V or AC 100-120V and USB  
2.Volume:4 Litre  
3.Power consumption:24W±10%


|                                |                                       |
|--------------------------------|---------------------------------------|
| Inner Box Size:274*196*277(mm) | Carton Size:405*290*575(mm)           |
| PACKING:1PC/Inner Box 4PCS/CTN |                                       |
| N.W/G.W.(KGS):7/10             | QTY/20*/40*/40*HC(PCS):1500/3200/3900 |



4 BOTTLES\*  
380ml Water



6 CANS\*  
330ml Cola

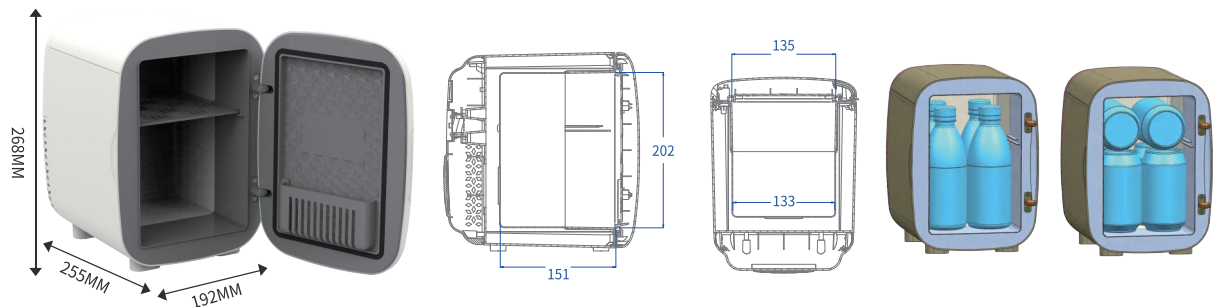

HEATING  
45-55°C  
COOLING  
5-8°C  
TA: 25°C



MFA-5L-I (US/UK/EU exclusive)  
THERMOELECTRIC COOLER AND WARMER  
1.Voltage:AC 220-240V or AC 100-120V and USB  
2.Volume:4 Litre  
3.Power consumption:24W±10%


|                                |                                       |
|--------------------------------|---------------------------------------|
| Inner Box Size:273*194*290(mm) | Carton Size:405*290*595(mm)           |
| PACKING:1PC/Inner Box 4PCS/CTN |                                       |
| N.W/G.W.(KGS):7.5/9.2          | QTY/20*/40*/40*HC(PCS):1500/3200/3900 |




4 BOTTLES\*  
380ml Water



6 CANS\*  
330ml Cola

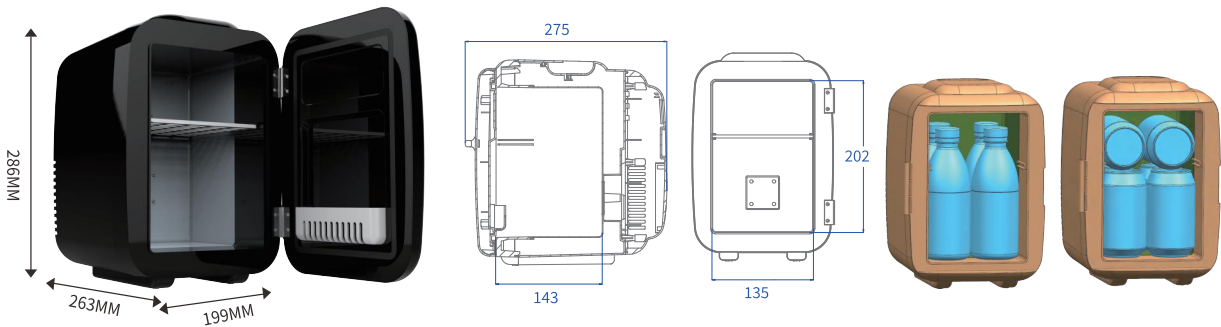





# MFA-5L-A

THERMOELECTRIC COOLER AND WARMER

- 1.Voltage:DC 12V and AC 220-240V or AC 100-120V
- 2.Volume:4 Litre
- 3.Power consumption:35W±10%


|                                |                                       |
|--------------------------------|---------------------------------------|
| Inner Box Size:273*194*290(mm) | Carton Size:405*290*595(mm)           |
| PACKING:1PC/Inner Box 4PCS/CTN |                                       |
| N.W/G.W.(KGS):8.0/10.0         | QTY/20"/40"/40*HC(PCS):1500/3200/3900 |



4 BOTTLES\*  
380ml Water



6 CANS\*  
330ml Cola

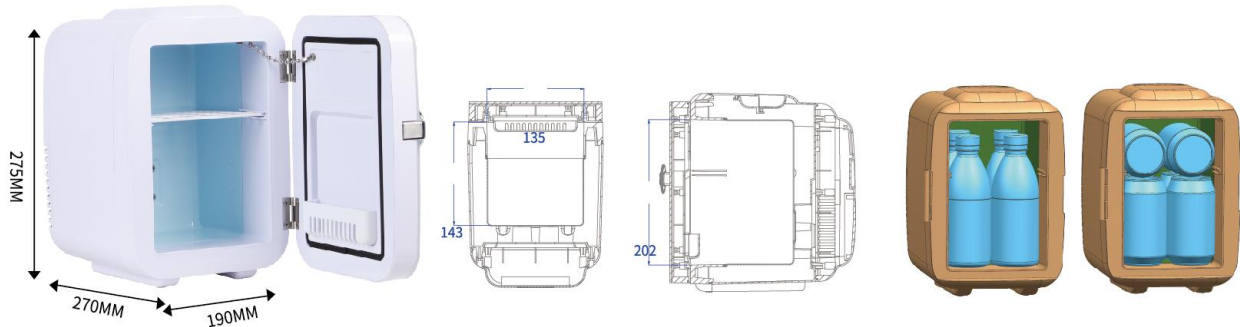

# MFA-5L-B

THERMOELECTRIC COOLER AND WARMER

- 1.Voltage:DC 12V and AC 220-240V or AC 100-120V
- 2.Volume:4 Litre
- 3.Power consumption:35W±10%


|                                |                                       |
|--------------------------------|---------------------------------------|
| Inner Box Size:273*194*290(mm) | Carton Size:405*290*595(mm)           |
| PACKING:1PC/Inner Box 4PCS/CTN |                                       |
| N.W/G.W.(KGS):7.5/9.2          | QTY/20"/40"/40*HC(PCS):1500/3200/3900 |



4 BOTTLES\*  
380ml Water



6 CANS\*  
330ml Cola

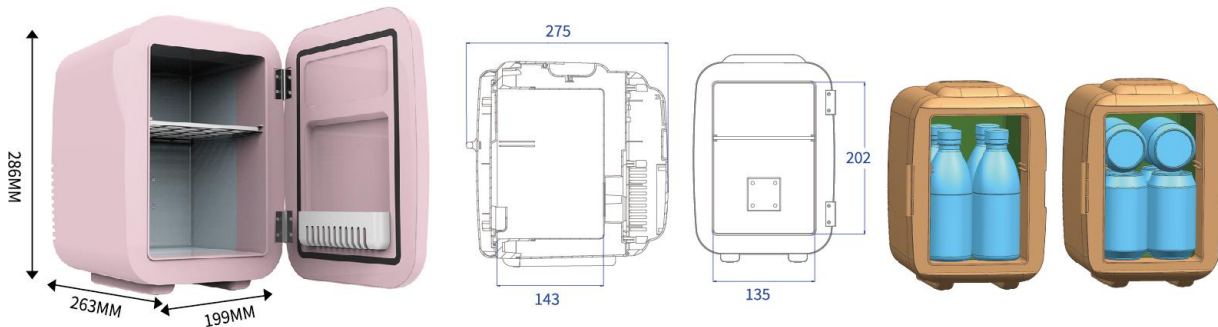

# MFA-5L-GA

THERMOELECTRIC COOLER AND WARMER

- 1.Voltage:AC 100-240V (with an adapter)
- 2.Volume:4 Litre
- 3.Power consumption:20W±10%




|                                |                                       |
|--------------------------------|---------------------------------------|
| Inner Box Size:300*198*285(mm) | Carton Size:585*420*320(mm)           |
| PACKING:1PC/Inner Box 4PCS/CTN |                                       |
| N.W/G.W.(KGS):6.5/9            | QTY/20"/40"/40*HC(PCS):1300/2850/3200 |



4 BOTTLES\*  
380ml Water



6 CANS\*  
330ml Cola

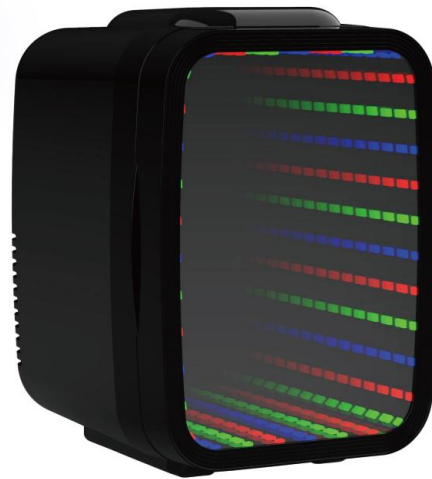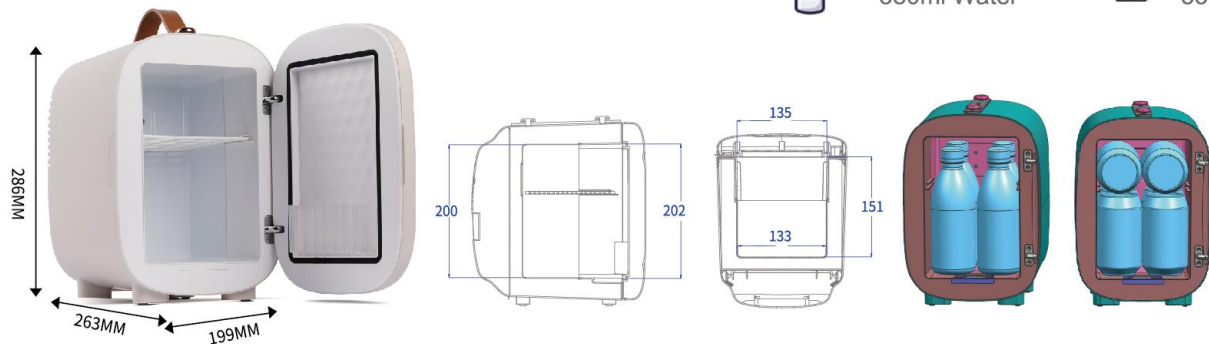

# MFA-5L-O

THERMOELECTRIC COOLER AND WARMER

- 1.Voltage:DC 12V and AC 220-240V or AC 100-120V
- 2.Volume:4 Litre
- 3.Power consumption:35W±10%


|                                |                                       |
|--------------------------------|---------------------------------------|
| Inner Box Size:285*200*295(mm) | Carton Size:420*300*615(mm)           |
| PACKING:1PC/Inner Box 4PCS/CTN |                                       |
| N.W/G.W.(KGS):8.0/10.0         | QTY/20"/40"/40*HC(PCS):1500/3200/3900 |



4 BOTTLES\*  
380ml Water



6 CANS\*  
330ml Cola

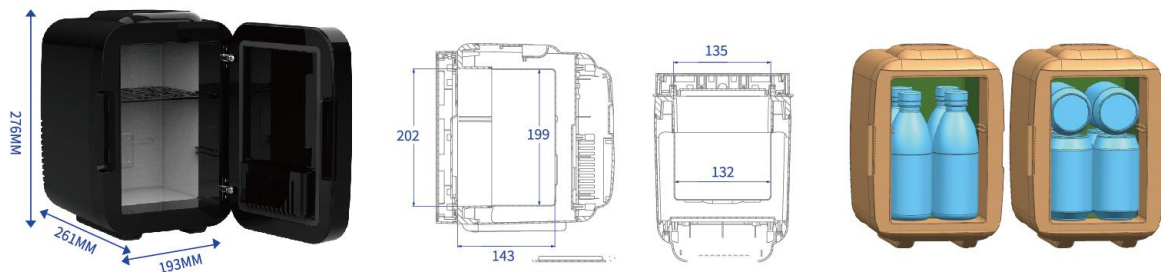



HEATING  
45-55℃  
COOLING  
5-8℃  
TA: 25℃




MFP-5L(US exclusive)  
THERMOELECTRIC COOLER AND WARMER

- 1.Voltage:DC 12V and AC 220-240V or AC 100-120V
- 2.Volume:4 Litre
- 3.Power consumption:35W±10%

|                                |                                       |
|--------------------------------|---------------------------------------|
| Inner Box Size:273*194*290(mm) | Carton Size:405*290*595(mm)           |
| PACKING:1PC/Inner Box 4PCS/CTN |                                       |
| N.W/G.W.(KGS):7.2/9.0          | QTY/20"/40"/40*HC(PCS):1500/3200/3900 |

4 BOTTLES\*  
380ml Water  
6 CANS\*  
330ml Cola

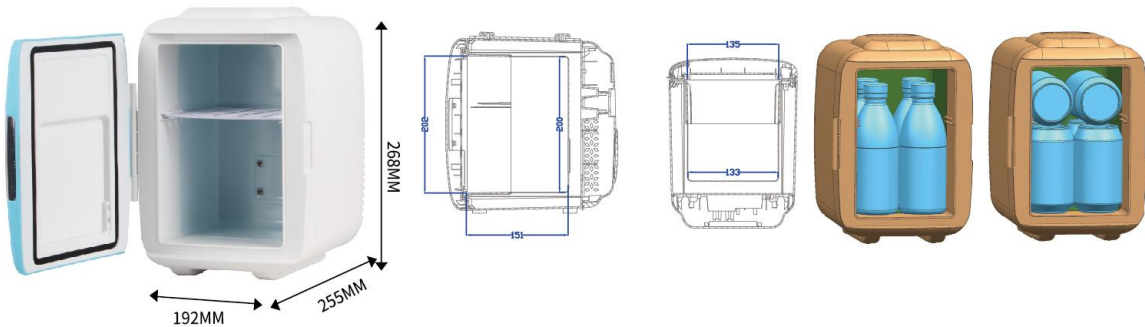

COOLING  
8-10℃  
TA: 25℃(no load)




MFA-6LL-B (US/EU exclusive)  
THERMOELECTRIC COOLER

- 1.Voltage:AC 100-240V(with an adapter)
- 2.Volume:6 Litre
- 3.Power consumption:27W±10%

|                                |                                       |
|--------------------------------|---------------------------------------|
| Inner Box Size:276*219*337(mm) | Carton Size:455*290*350(mm)           |
| PACKING:1PC/Inner Box 2PCS/CTN |                                       |
| N.W/G.W.(KGS):4.6/6.6          | QTY/20"/40"/40*HC(PCS):1200/2400/2850 |

4 BOTTLES\*  
380ml Water  
8 CANS\*  
330ml Cola

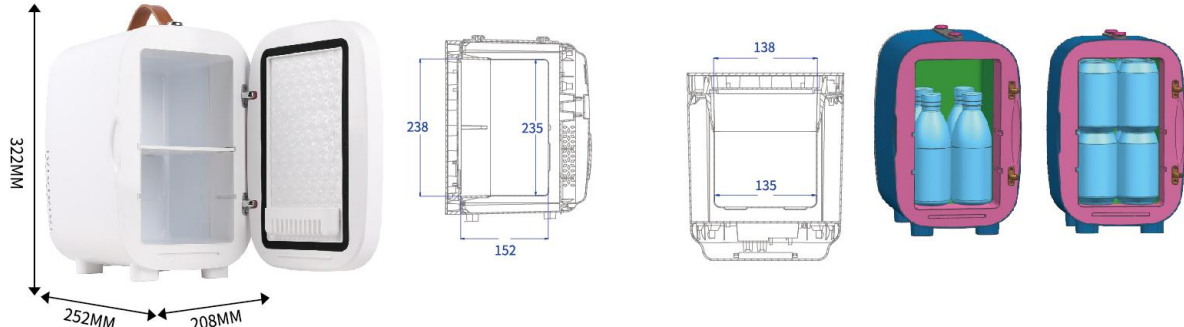

COOLING  
8-10℃  
TA: 25℃(no load)




MFP-5LL-A (US/EU exclusive)  
THERMOELECTRIC COOLER

- 1.Voltage:AC 100-240V(with an adapter)
- 2.Volume:4 Litre
- 3.Power consumption:27W±10%

|                                |                                       |
|--------------------------------|---------------------------------------|
| Inner Box Size:274*196*277(mm) | Carton Size:405*290*575(mm)           |
| PACKING:1PC/Inner Box 4PCS/CTN |                                       |
| N.W/G.W.(KGS):7/10             | QTY/20"/40"/40*HC(PCS):1500/3200/3900 |

4 BOTTLES\*  
380ml Water  
6 CANS\*  
330ml Cola

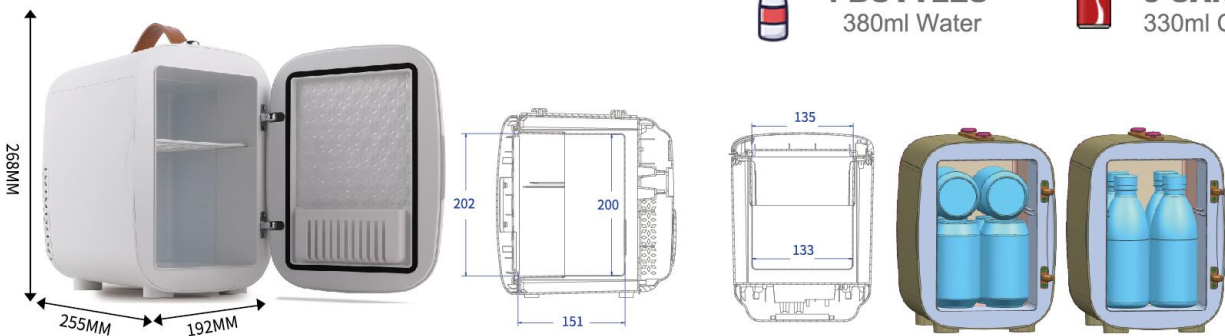

COOLING  
8-10℃  
TA: 25℃(no load)




MFA-6LL-A (US/EU exclusive)  
THERMOELECTRIC COOLER

- 1.Voltage:AC 100-240V(with an adapter)
- 2.Volume:6 Litre
- 3.Power consumption:27W±10%

|                                |                                       |
|--------------------------------|---------------------------------------|
| Inner Box Size:276*219*337(mm) | Carton Size:455*290*350(mm)           |
| PACKING:1PC/Inner Box 2PCS/CTN |                                       |
| N.W/G.W.(KGS):3.8/5.8          | QTY/20"/40"/40*HC(PCS):1200/2400/2850 |

4 BOTTLES\*  
380ml Water  
6 CANS\*  
330ml Cola

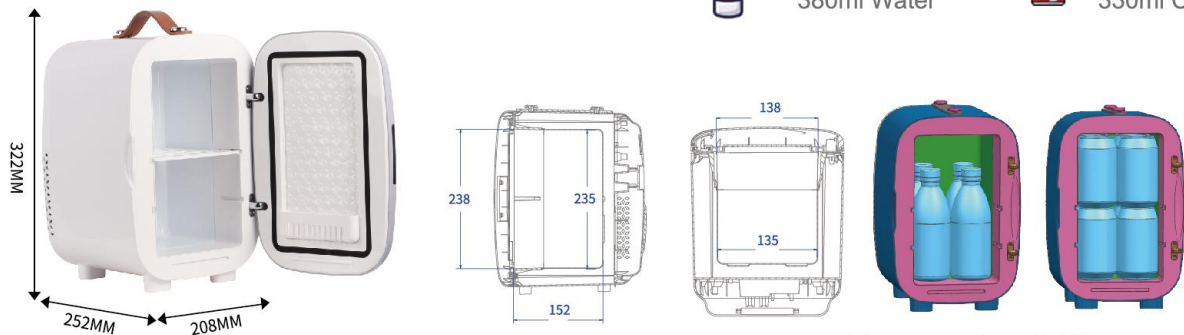



HEATING  
50-65℃  
COOLING  
5-8℃  
TA: 25℃




MFA-6L  
THERMOELECTRIC COOLER AND WARMER

- 1.Voltage:DC 12V and AC 220-240V or AC 100-120V
- 2.Volume:6 Litre
- 3.Power consumption:48W±10%

|                                |                                      |
|--------------------------------|--------------------------------------|
| Inner Box Size:315*260*350(mm) | Carton Size:540*330*720(mm)          |
| PACKING:1PC/Inner Box 4PCS/CTN |                                      |
| N.W/G.W.(KGS):11/15            | QTY/20"/40"/40"HC(PCS):850/1750/2050 |

4 BOTTLES\*  
380ml Water  
8 CANS\*  
330ml Cola

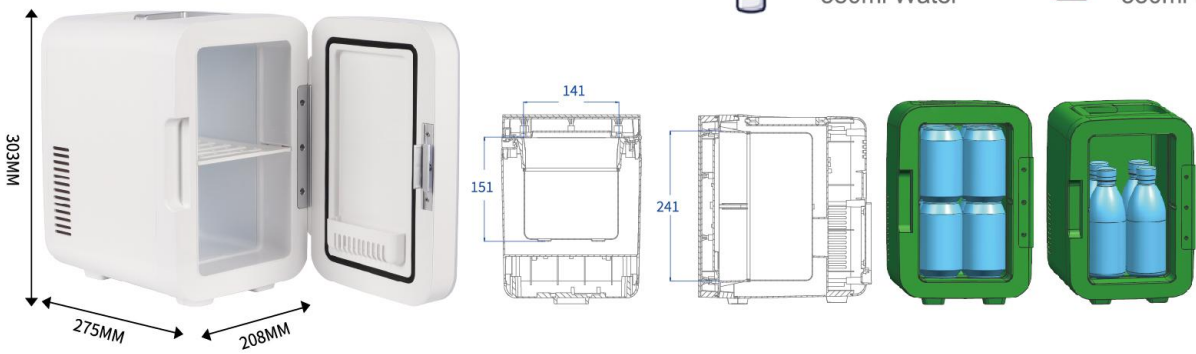

COOLING  
8-10℃  
TA: 25℃




CBA-6L-F  
THERMOELECTRIC COOLER

- 1.Voltage:AC 100-240V(with an adapter)
- 2.Volume:6 Litre
- 3.Power consumption:27W±10%

|                                |                                       |
|--------------------------------|---------------------------------------|
| Inner Box Size:374*252*218(mm) | Carton Size:525*390*460(mm)           |
| PACKING:1PC/Inner Box 4PCS/CTN |                                       |
| N.W/G.W.(KGS):9/11.5           | QTY/20"/40"/40"HC(PCS):1100/2400/2700 |

4 BOTTLES\*  
380ml Water  
8 CANS\*  
330ml Cola

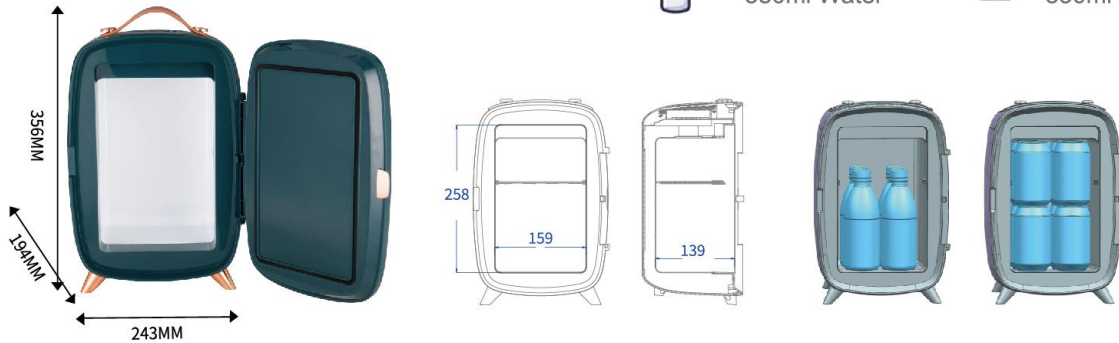

COOLING  
8-10℃  
TA: 25℃



CBA-6L-G  
THERMOELECTRIC COOLER

- 1.Voltage:AC 100-240V(with an adapter)
- 2.Volume:6 Litre
- 3.Power consumption:27W±10%

|                                |                                       |
|--------------------------------|---------------------------------------|
| Inner Box Size:374*252*218(mm) | Carton Size:525*390*460(mm)           |
| PACKING:1PC/Inner Box 4PCS/CTN |                                       |
| N.W/G.W.(KGS):7/9.45           | QTY/20"/40"/40"HC(PCS):1100/2400/2700 |

4 BOTTLES\*  
380ml Water  
8 CANS\*  
330ml Cola



COOLING  
8-10℃  
TA: 25℃



CBA-6L-H  
THERMOELECTRIC COOLER

- 1.Voltage:AC 100-240V(with an adapter)
- 2.Volume:6 Litre
- 3.Power consumption:27W±10%

|                                |                                       |
|--------------------------------|---------------------------------------|
| Inner Box Size:374*252*218(mm) | Carton Size:525*390*460(mm)           |
| PACKING:1PC/Inner Box 4PCS/CTN |                                       |
| N.W/G.W.(KGS):7/9.45           | QTY/20"/40"/40"HC(PCS):1100/2400/2700 |

4 BOTTLES\*  
380ml Water  
8 CANS\*  
330ml Cola






COOLING  
8-10℃  
TA: 25℃



CBA-6L  
THERMOELECTRIC COOLER

- 1.Voltage:AC 100-240V(with an adapter)
  - 2.Volume:6 Litre
  - 3.Power consumption:27W±10%
- |                                |                                       |
|--------------------------------|---------------------------------------|
| Inner Box Size:369*325*222(mm) | Carton Size:520*380*465(mm)           |
| PACKING:1PC/Inner Box 4PCS/CTN |                                       |
| N.W/G.W.(KGS):7/9.45           | QTY/20*/40*/40*HC(PCS):1100/2400/2700 |

4 BOTTLES\* 380ml Water 8 CANS\* 330ml Cola

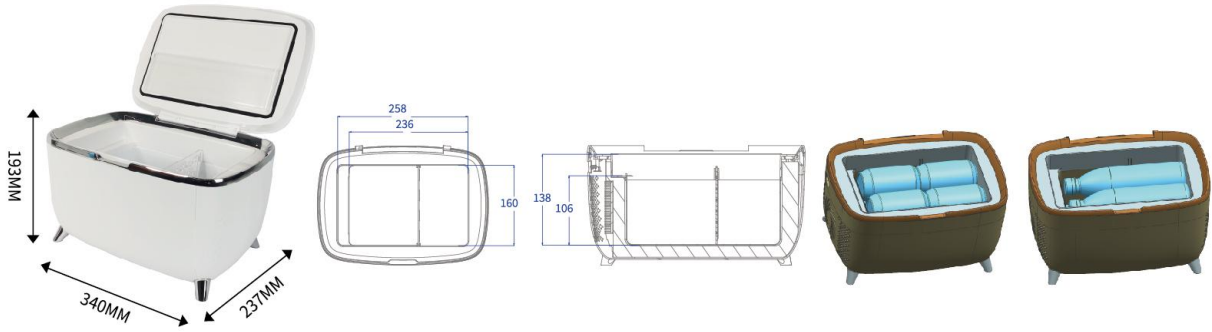


COOLING  
8-10℃  
TA: 25℃



CBA-6L-A  
THERMOELECTRIC COOLER

- 1.Voltage:AC 100-240V(with an adapter)
  - 2.Volume:6 Litre
  - 3.Power consumption:27W±10%
- |                                |                                       |
|--------------------------------|---------------------------------------|
| Inner Box Size:369*325*222(mm) | Carton Size:520*380*465(mm)           |
| PACKING:1PC/Inner Box 4PCS/CTN |                                       |
| N.W/G.W.(KGS):7/9.45           | QTY/20*/40*/40*HC(PCS):1100/2400/2700 |

4 BOTTLES\* 380ml Water 8 CANS\* 330ml Cola

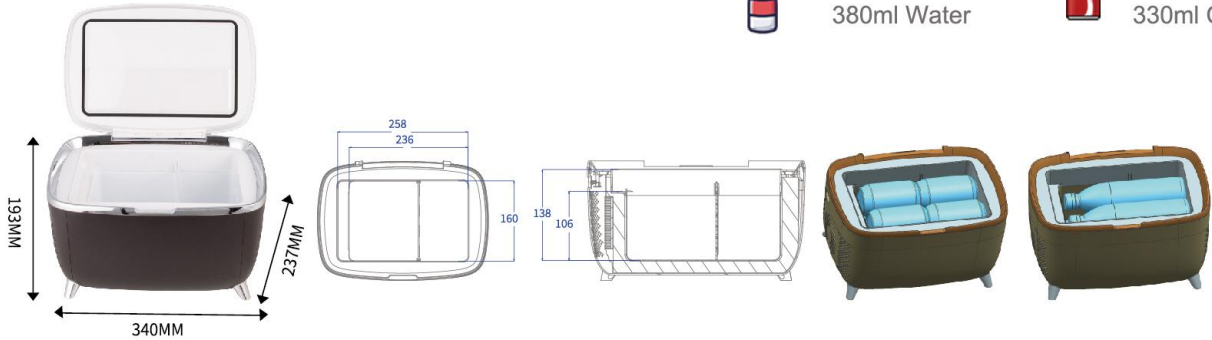


HEATING 50-65℃ COOLING 5-8℃  
TA: 25℃



MFA-10L-C  
THERMOELECTRIC COOLER AND WARMER

- 1.Voltage:DC 12V and AC 220-240V or AC 100-120V
  - 2.Volume:10 Litre
  - 3.Power consumption:50W±10%
- |                                |                                      |
|--------------------------------|--------------------------------------|
| Inner Box Size:326*280*379(mm) | Carton Size:575*340*395(mm)          |
| PACKING:1PC/Inner Box 2PCS/CTN |                                      |
| N.W/G.W.(KGS):7.5/9.5          | QTY/20*/40*/40*HC(PCS):760/1500/1720 |

5 BOTTLES\* 380ml Water 11 CANS\* 330ml Cola

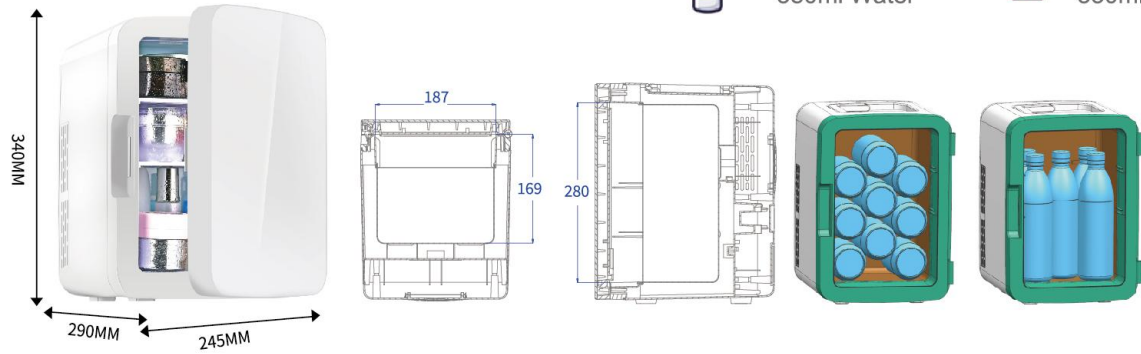


HEATING 50-65℃ COOLING 5-8℃  
TA: 25℃



MFA-10L  
THERMOELECTRIC COOLER AND WARMER

- 1.Voltage:DC 12V and AC 220-240V or AC 100-120V
  - 2.Volume:10 Litre
  - 3.Power consumption:50W±10%
- |                                |                                      |
|--------------------------------|--------------------------------------|
| Inner Box Size:326*280*379(mm) | Carton Size:575*340*395(mm)          |
| PACKING:1PC/Inner Box 2PCS/CTN |                                      |
| N.W/G.W.(KGS):7.0/9.0          | QTY/20*/40*/40*HC(PCS):760/1500/1720 |

5 BOTTLES\* 380ml Water 11 CANS\* 330ml Cola

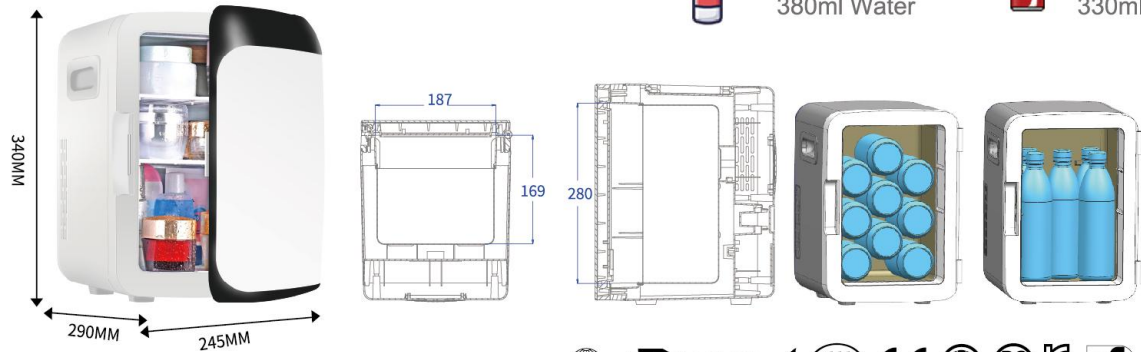





# MFA-10L-JA4


THERMOELECTRIC COOLER AND WARMER

- 1.Voltage:AC 100-240V or DC 12V
- 2.Volume:10 Litre
- 3.Power consumption:50W±10%

|                                |                                      |
|--------------------------------|--------------------------------------|
| Inner Box Size:355*283*398(mm) | Carton Size:590*370*415(mm)          |
| PACKING:1PC/Inner Box 2PCS/CTN |                                      |
| N.W/G.W.(KGS):3.7/4.8          | QTY/20"/40"/40*HC(PCS):615/1270/1490 |

**5 BOTTLES\***  
380ml Water

**11 CANS\***  
330ml Cola

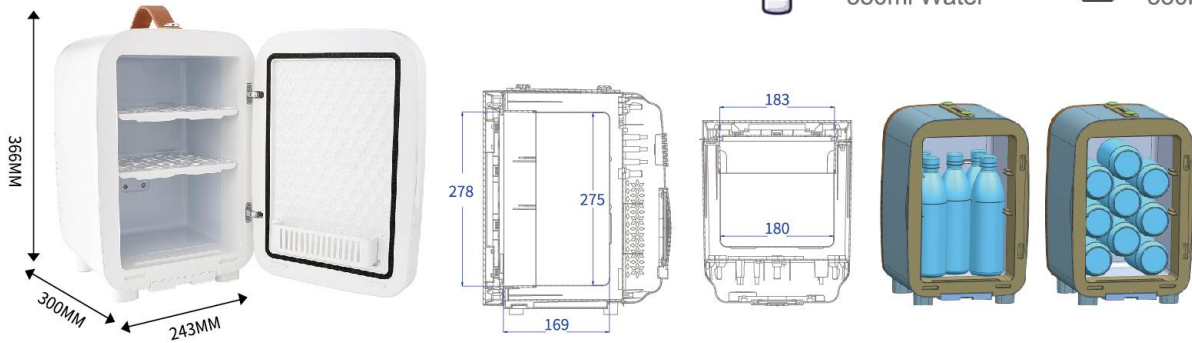

# MFA-10L-JA2


THERMOELECTRIC COOLER AND WARMER(single cooling)

- 1.Voltage:AC 100-240V or DC 12V
- 2.Volume:10 Litre
- 3.Power consumption:50W±10%

|                                |                                      |
|--------------------------------|--------------------------------------|
| Inner Box Size:355*283*398(mm) | Carton Size:590*370*415(mm)          |
| PACKING:1PC/Inner Box 2PCS/CTN |                                      |
| N.W/G.W.(KGS):3.7/4.8          | QTY/20"/40"/40*HC(PCS):615/1270/1490 |

**5 BOTTLES\***  
380ml Water

**11 CANS\***  
330ml Cola

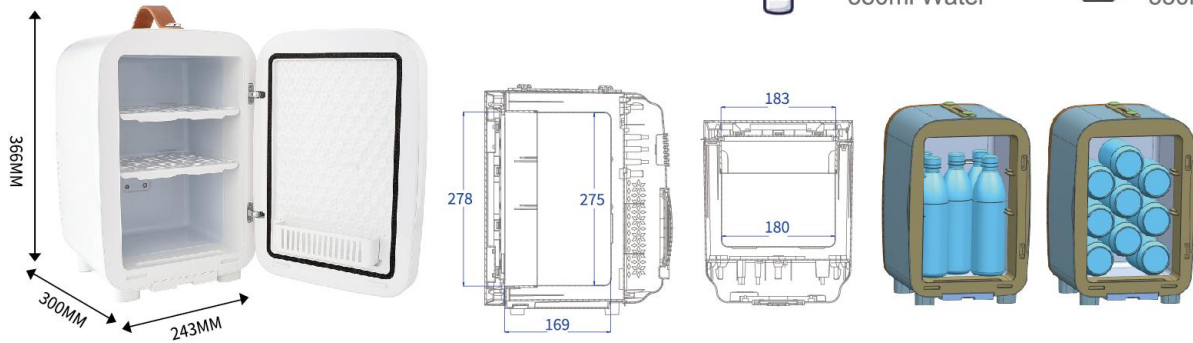

# MFA-15L-RA4


KITCHEN GARBAGE COOLER AND WARMER

- 1.Voltage:AC 100-240V or DC 12V
- 2.Volume:15 Litre
- 3.Power consumption:50W±10%

|                                |                                     |
|--------------------------------|-------------------------------------|
| Inner Box Size:395*313*458(mm) | Carton Size:655*410*470(mm)         |
| PACKING:1PC/Inner Box 2PCS/CTN |                                     |
| N.W/G.W.(KGS):4.9/5.7          | QTY/20"/40"/40*HC(PCS):440/913/1070 |

**8 BOTTLES\***  
380ml Water

**16 CANS\***  
330ml Cola

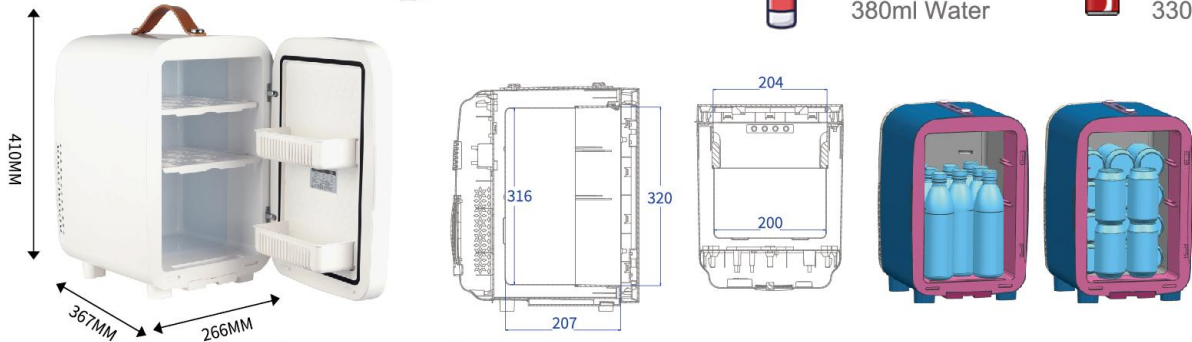

# MFA-15L-RA2


THERMOELECTRIC COOLER AND WARMER

- 1.Voltage:AC 100-240V or DC 12V
- 2.Volume:15 Litre
- 3.Power consumption:50W±10%

|                                |                                     |
|--------------------------------|-------------------------------------|
| Inner Box Size:385*313*458(mm) | Carton Size:655*410*470(mm)         |
| PACKING:1PC/Inner Box 2PCS/CTN |                                     |
| N.W/G.W.(KGS):4.9/5.7          | QTY/20"/40"/40*HC(PCS):440/913/1070 |

**8 BOTTLES\***  
380ml Water

**16 CANS\***  
330ml Cola

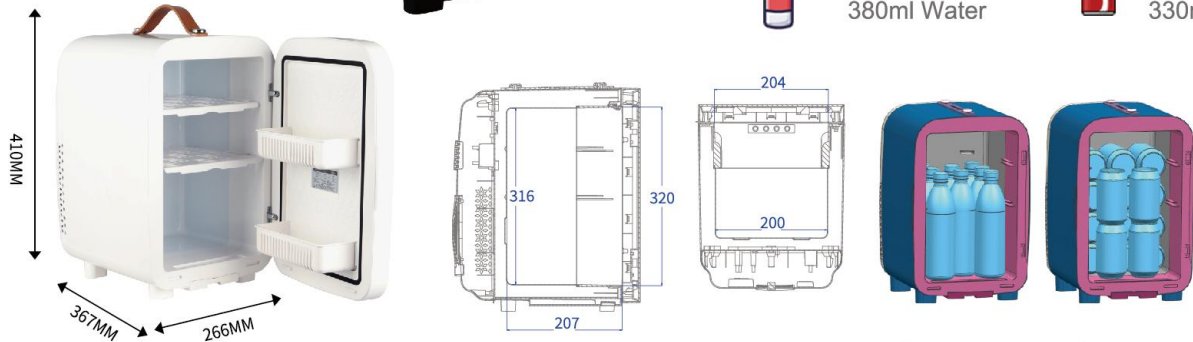





# MFA-9L


THERMOELECTRIC COOLER AND WARMER

- 1.Voltage:DC 12V and AC 220V-240V or AC 100-120V
- 2.Volume:9 Litre
- 3.Power consumption:50W±10%

|                                |                                      |
|--------------------------------|--------------------------------------|
| Inner Box Size:296*298*358(mm) | Carton Size:620*620*380(mm)          |
| PACKING:1PC/Inner Box 4PCS/CTN |                                      |
| N.W/G.W.(KGS):10.6/15.0        | QTY/20"/40"/40*HC(PCS):760/1600/1900 |

**7 BOTTLES\***  
380ml Water

**9 CANS\***  
330ml Cola

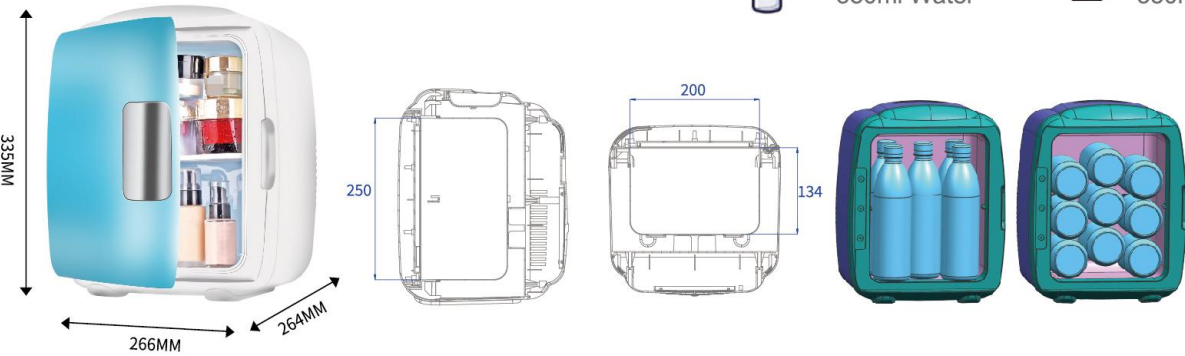

# MFA-14L


THERMOELECTRIC COOLER AND WARMER

- 1.Voltage:DC 12V and AC 220V-240V or AC 100-120V
- 2.Volume:12.8 Litre
- 3.Power consumption:50W±10%

|                                |                                      |
|--------------------------------|--------------------------------------|
| Inner Box Size:321*392*403(mm) | Carton Size:650*415*420(mm)          |
| PACKING:1PC/Inner Box 2PCS/CTN |                                      |
| N.W/G.W.(KGS):12.0/13.0        | QTY/20"/40"/40*HC(PCS):550/1050/1200 |

**15 BOTTLES\***  
380ml Water

**12 CANS\***  
330ml Cola

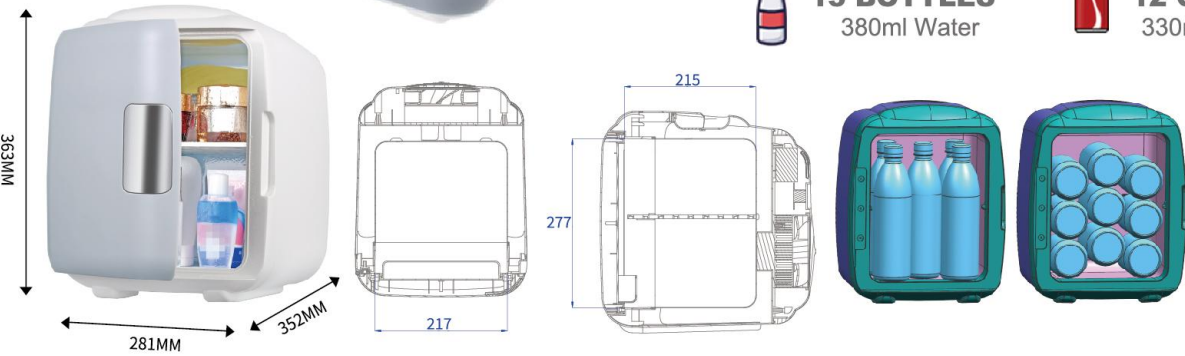

# MFA-15L


THERMOELECTRIC COOLER AND WARMER(Single cooling)

- 1.Voltage:DC 12V and AC220V-240V or AC 100-120V
- 2.Volume:15 Litre
- 3.Power consumption:50W±10%

|                                |                                      |
|--------------------------------|--------------------------------------|
| Inner Box Size:394*324*445(mm) | Carton Size:668*410*475(mm)          |
| PACKING:1PC/Inner Box 2PCS/CTN |                                      |
| N.W/G.W.(KGS):9.5/12.5         | QTY/20"/40"/40*HC(PCS):450/1000/1100 |

**17 BOTTLES\***  
380ml Water

**20 CANS\***  
330ml Cola

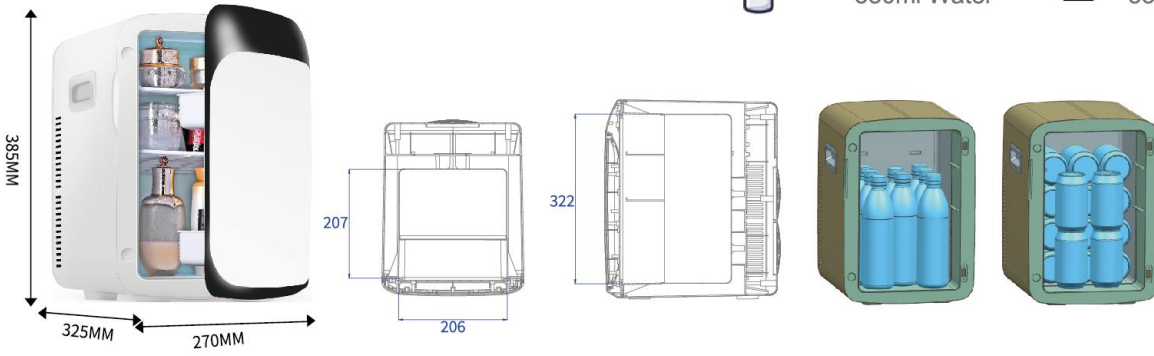

# MFA-15L-L


THERMOELECTRIC COOLER AND WARMER(Dual cooling)

- 1.Voltage:DC 12V and AC220V-240V or AC 100-120V
- 2.Volume:15 Litre
- 3.Power consumption:50W±10%

|                                |                                      |
|--------------------------------|--------------------------------------|
| Inner Box Size:394*324*445(mm) | Carton Size:668*410*475(mm)          |
| PACKING:1PC/Inner Box 2PCS/CTN |                                      |
| N.W/G.W.(KGS):9.8/13.0         | QTY/20"/40"/40*HC(PCS):450/1000/1100 |

**17 BOTTLES\***  
380ml Water

**20 CANS\***  
330ml Cola

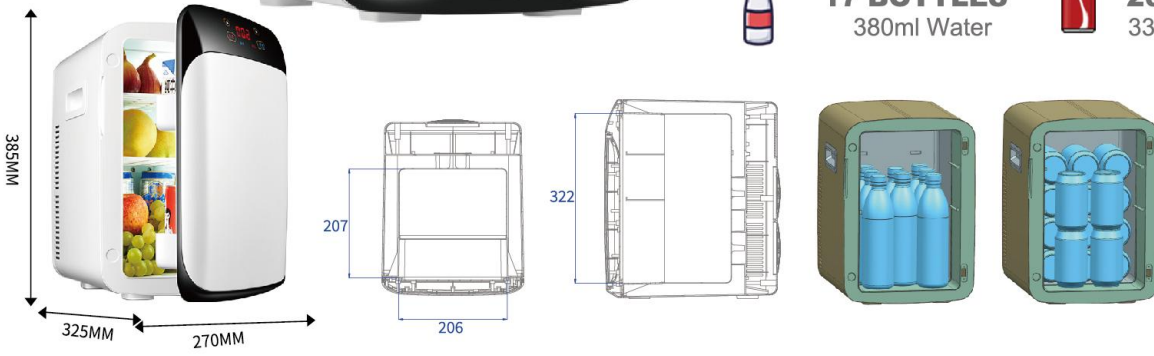



HEATING 50-65℃  
COOLING 5-8℃  
TA: 25℃




# MFA-15L-C

THERMOELECTRIC COOLER AND WARMER(Single cooling)

- 1.Voltage:DC 12V and AC 220V-240V or AC 100-120V
- 2.Volume:15 Litre
- 3.Power consumption:50W±10%

|                                |                                      |
|--------------------------------|--------------------------------------|
| Inner Box Size:380*315*432(mm) | Carton Size:395*645*450(mm)          |
| PACKING:1PC/Inner Box 2PCS/CTN |                                      |
| N.W/G.W.(KGS):9.6/12.8         | QTY/20"/40"/40*HC(PCS):450/1000/1100 |

17 BOTTLES\* 380ml Water  
20 CANS\* 330ml Cola

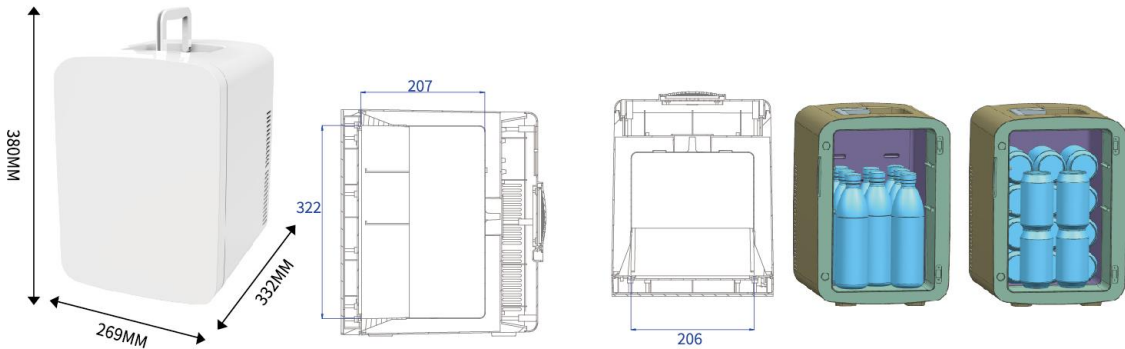

HEATING 50-65℃  
COOLING 0-5℃  
TA: 25℃




# MFA-15L-O

THERMOELECTRIC COOLER AND WARMER(Dual cooling)

- 1.Voltage:DC 12V and AC 220V-240V or AC 100-120V
- 2.Volume:15 Litre
- 3.Power consumption:71W±10%

|                                |                                      |
|--------------------------------|--------------------------------------|
| Inner Box Size:380*315*432(mm) | Carton Size:395*645*450(mm)          |
| PACKING:1PC/Inner Box 2PCS/CTN |                                      |
| N.W/G.W.(KGS):10.0/13.5        | QTY/20"/40"/40*HC(PCS):450/1000/1100 |

17 BOTTLES\* 380ml Water  
20 CANS\* 330ml Cola

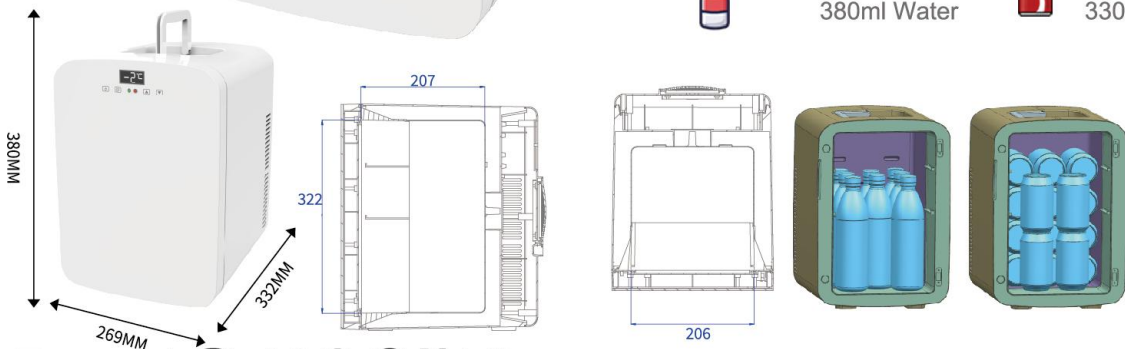

HEATING 50-65℃  
COOLING 0-5℃  
TA: 25℃




# MFA-20L-F

THERMOELECTRIC COOLER AND WARMER(Dual cooling)

- 1.Voltage:DC 12V and AC220V-240V or AC 100-120V
- 2.Volume:20 Litre
- 3.Power consumption:71W±10%

|                                |                                     |
|--------------------------------|-------------------------------------|
| Inner Box Size:415*365*495(mm) | Carton Size:750*435*515(mm)         |
| PACKING:1PC/Inner Box 2PCS/CTN |                                     |
| N.W/G.W.(KGS):12/16            | QTY/20"/40"/40*HC(PCS):400/800/1000 |

19 BOTTLES\* 380ml Water  
22 CANS\* 330ml Cola

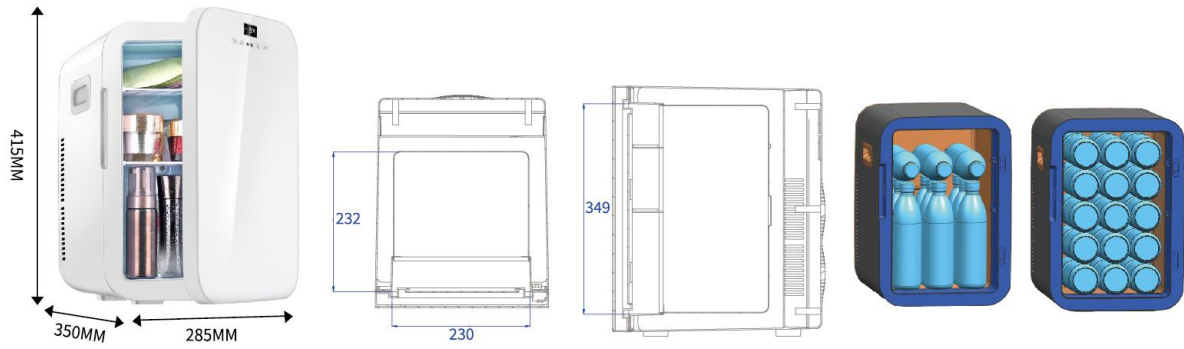

HEATING 50-65℃  
COOLING 0-5℃  
TA: 25℃




# MFA-20L-I

THERMOELECTRIC COOLER AND WARMER(Dual cooling)

- 1.Voltage:DC 12V and AC220V-240V or AC 100-120V
- 2.Volume:20 Litre
- 3.Power consumption:71W±10%

|                                |                                     |
|--------------------------------|-------------------------------------|
| Inner Box Size:415*365*495(mm) | Carton Size:750*435*515(mm)         |
| PACKING:1PC/Inner Box 2PCS/CTN |                                     |
| N.W/G.W.(KGS):11/15            | QTY/20"/40"/40*HC(PCS):400/800/1000 |

19 BOTTLES\* 380ml Water  
22 CANS\* 330ml Cola

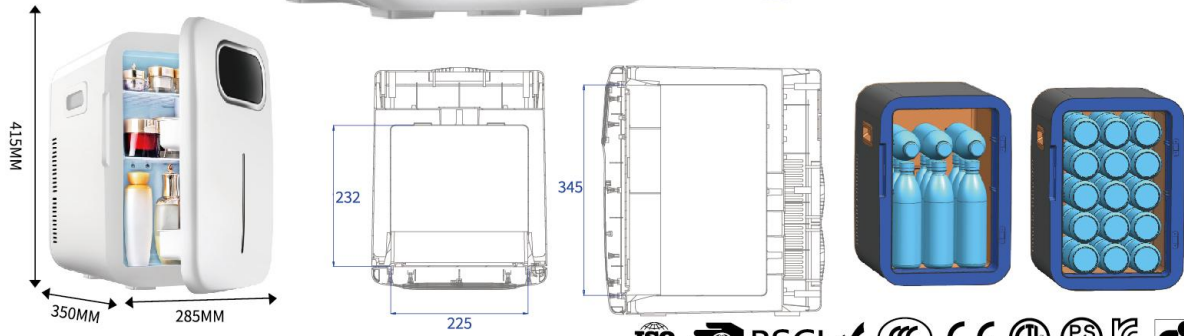





# MFA-26L-B

THERMOELECTRIC COOLER AND WARMER(Dual cooling)

- 1.Voltage:DC 12V and AC220V-240V or AC 100-120V
- 2.Volume:25 Litre
- 3.Power consumption:71W±10%

|                                |                                    |
|--------------------------------|------------------------------------|
| Inner Box Size:408*387*564(mm) | Carton Size:420*400*580(mm)        |
| PACKING:1 PC/CTN               |                                    |
| N.W/G.W.(KGS):8.5/10           | QTY/20"/40"/40"HC(PCS):310/570/660 |

**22 BOTTLES\***  
380ml Water

**29 CANS\***  
330ml Cola



# MFA-28L-A

THERMOELECTRIC COOLER AND WARMER(Dual cooling)

- 1.Voltage:DC 12V and AC220V-240V or AC 100-120V
- 2.Volume:25 Litre
- 3.Power consumption:71W±10%

|                             |                                    |
|-----------------------------|------------------------------------|
| Carton Size:410*385*565(mm) |                                    |
| PACKING:1PC/CTN             |                                    |
| N.W/G.W.(KGS):7/7.8         | QTY/20"/40"/40"HC(PCS):320/670/780 |

**22 BOTTLES\***  
380ml Water

**29 CANS\***  
330ml Cola

# COMPRESSOR FRIDGE

## APPLY TO

CAR, OUTDOOR, CAMPING, FAMILY PARTY, FISHING

- Dual Purpose
- Low Noise
- down to -20°C
- Seismic and anti Shake
- Pulley/Pull Rod
- Double Door Design
- Battery Protection
- lithium battery
- Double Control



The handle and wheels in the picture are options ,  
Not standard





NEW

C055-030

- 1.Volume:30 Litre
- 2.Insulation layer:PU Foam
- 3.Cooling:-20-20°C(ambient temperature 32°C,no load)
- 4.Optional accessories: Bottle opener, Divider, Ice tray, Metal basket

|                                 |                                    |
|---------------------------------|------------------------------------|
| Area1 size:337x300x245.5(mm)    | Area2 size:132x300x89(mm)          |
| External Size:633x392x344.5(mm) | PACKING:1PC/Inner Box 1PCS/CTN     |
| N.W/G.W(KGS):13.2/15.5          | QTY/20"/40"/40"HC(PCS):240/495/594 |



NEW

C055-040

- 1.Volume:40 Litre
- 2.Insulation layer:PU Foam
- 3.Cooling:-20-20°C(ambient temperature 32°C,no load)
- 4.Optional accessories: Bottle opener, Divider, Ice tray, Metal basket

|                                 |                                    |
|---------------------------------|------------------------------------|
| Area1 size:337x300x305(mm)      | Area2 size:132x300x149(mm)         |
| External Size:633x392x404.5(mm) | PACKING:1PC/Inner Box 1PCS/CTN     |
| N.W/G.W(KGS):15.2/17.5          | QTY/20"/40"/40"HC(PCS):220/445/528 |



NEW

C055-050

- 1.Volume:50 Litre
- 2.Insulation layer:PU Foam
- 3.Cooling:-20-20°C(ambient temperature 32°C,no load)
- 4.Optional accessories: Bottle opener, Divider, Ice tray, Metal basket

|                                 |                                    |
|---------------------------------|------------------------------------|
| Area1 size:337x300x365.5(mm)    | Area2 size:132x300x209(mm)         |
| External Size:633x392x464.5(mm) | PACKING:1PC/Inner Box 1PCS/CTN     |
| N.W/G.W(KGS):17.2/19.5          | QTY/20"/40"/40"HC(PCS):187/384/457 |







C055-030M

- 1. Volume:30 Litre
- 2. Material: Sheet metal
- 3. Cooling:-20-20°C(ambient temperature 32°C,no load)



C055-040M

- 1. Volume:40 Litre
- 2. Material: Sheet metal
- 3. Cooling:-20-20°C(ambient temperature 32°C,no load)






COOLING  
-22-24°C  
TA: 32°C(no load)



C052-035

- 1.Voltage:DC 12-24V and AC 100V-240V (with an adapter)
- 2.Volume:37 Litre
- 3.Cooling:-22-24°C(ambient temperature 32°C,no load)


|                             |                                    |
|-----------------------------|------------------------------------|
| Inner Size:390x328x337(mm)  | Inner Box Size:740x475x510(mm)     |
| Carton Size:758x493x525(mm) | PACKING:1PC/CTN                    |
| N.W/G.W(KGS):25/26.5        | QTY/20"/40"/40"HC(PCS):130/270/320 |

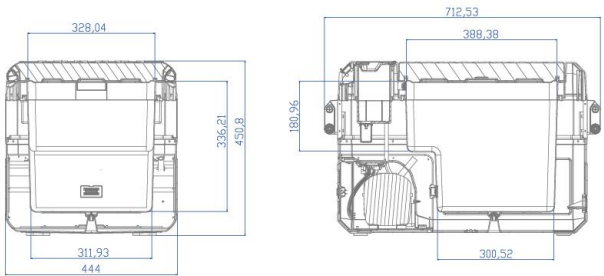

C052-055

- 1.Voltage:DC 12-24V and AC 100V-240V (with an adapter)
- 2.Volume:55 Litre
- 3.Cooling:-22-24°C(ambient temperature 32°C,no load)

|                             |                                    |
|-----------------------------|------------------------------------|
| Inner Size:495x368x337(mm)  | Inner Box Size:844x515x510(mm)     |
| Carton Size:862x533x525(mm) | PACKING:1PC/CTN                    |
| N.W/G.W(KGS):29/30.8        | QTY/20"/40"/40"HC(PCS):100/225/260 |

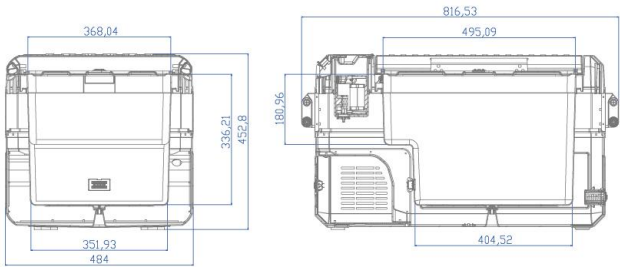


COOLING  
-20-20°C  
TA: 32°C(no load)



C056-072

- 1.Voltage:DC 12-24V and AC 100V-240V (with an adapter)
- 2.Volume:72 Litre
- 3.Cooling:-20-20°C(ambient temperature 32°C,no load)

|                              |                                   |
|------------------------------|-----------------------------------|
| Inner Size:291x422x291(mm)x2 | Inner Box Size:1007x580x513(mm)   |
| Carton Size:1023x600x525(mm) | PACKING:1PC/CTN                   |
| N.W/G.W(KGS):31/34.2         | QTY/20"/40"/40"HC(PCS):72/160/200 |

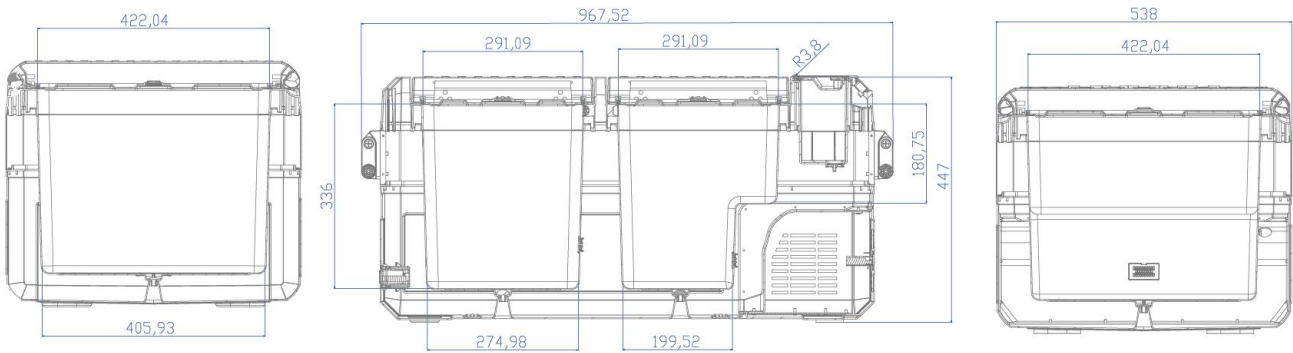



COOLING  
-22-24°C


TA: 32°C(no load)



# C052-022M

- 1.Voltage:DC 12-24V and AC 100V-240V (with an adapter)
- 2.Volume:22 Litre
- 3.Cooling:-22-24°C(ambient temperature 32°C,no load)


|                                    |                             |
|------------------------------------|-----------------------------|
| Inner Size:486x263x212(mm)         | Carton Size:683x406x385(mm) |
| PACKING:1PC/CTN                    |                             |
| QTY/20"/40"/40"HC(PCS):230/540/630 |                             |

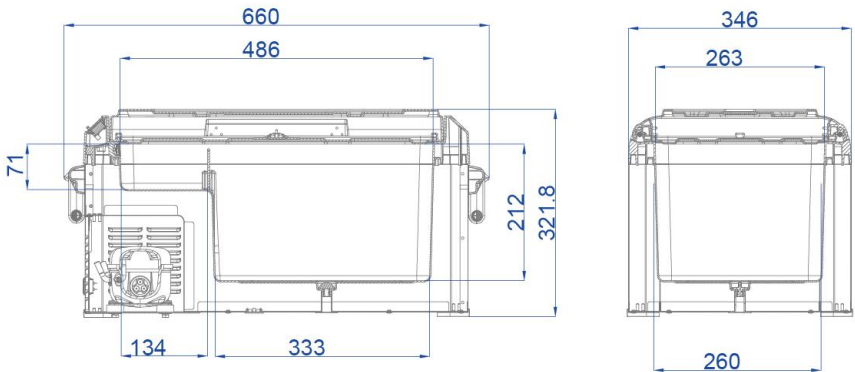

# C052-32M

- 1.Voltage:DC 12-24V and AC 100V-240V (with an adapter)
- 2.Volume:35 Litre
- 3.Cooling:-20-24°C(ambient temperature 32°C,no load)

|                             |                                    |
|-----------------------------|------------------------------------|
| Inner Size:486*263*316(mm)  | Outer Size:660*346*422(mm)         |
| Carton Size:695*418*500(mm) |                                    |
| N.W/G.W(KGS):13.75/16.25    | QTY/20"/40"/40"HC(PCS):180/360/450 |

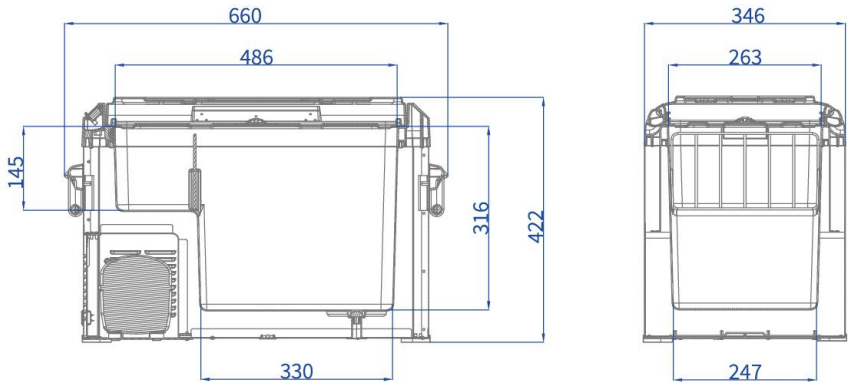


NEW



# C053-040M

- 1.Voltage:DC 12-24V and AC 100V-240V (with an adapter)
- 2.Volume:38 Litre
- 3.Cooling:-22-24°C(ambient temperature 32°C,no load)


|                                    |                             |
|------------------------------------|-----------------------------|
| Inner Size1:193x323x145(mm)        | Inner Size2:283x323x331(mm) |
| Carton Size:733x481x505(mm)        | PACKING:1PC/CTN             |
| QTY/20"/40"/40"HC(PCS):140/320/380 |                             |

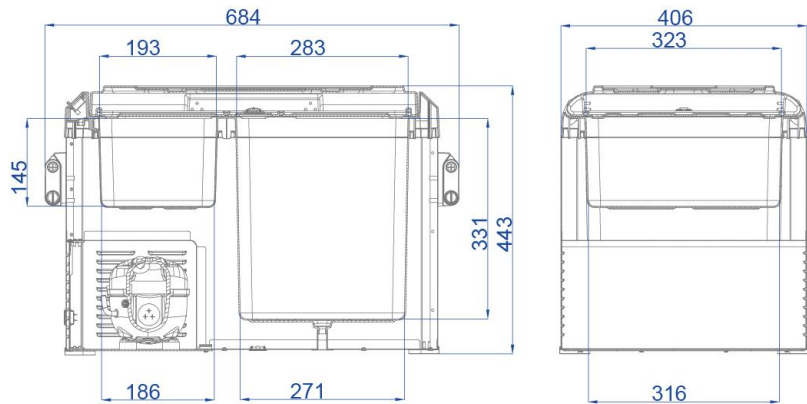

# C053-050M

- 1.Voltage:DC 12-24V and AC 100V-240V (with an adapter)
- 2.Volume:47 Litre
- 3.Cooling:-22-24°C(ambient temperature 32°C,no load)

|                                    |                             |
|------------------------------------|-----------------------------|
| Inner Size1:193x323x207(mm)        | Inner Size2:283x323x398(mm) |
| Carton Size:733x481x570(mm)        | PACKING:1PC/CTN             |
| QTY/20"/40"/40"HC(PCS):120/280/330 |                             |

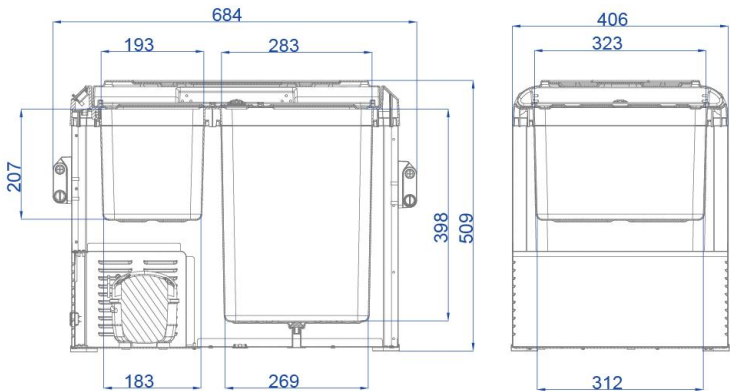




COOLING  
-22-24℃  
TA: 32℃(no load)



C051-015

- 1.Voltage:DC 12-24V and AC 100V-240V (with an adapter)
- 2.Volume:15 Litre
- 3.Cooling:-22-24℃(ambient temperature 32℃,no load)

|                             |                                    |
|-----------------------------|------------------------------------|
| Inner Size:358*156*271(mm)  | Outer Size:650*235*355(mm)         |
| Carton Size:693*298*415(mm) |                                    |
| N.W/G.W(KGS):9.65/11.17     | QTY/20"/40"/40"HC(PCS):325/640/786 |

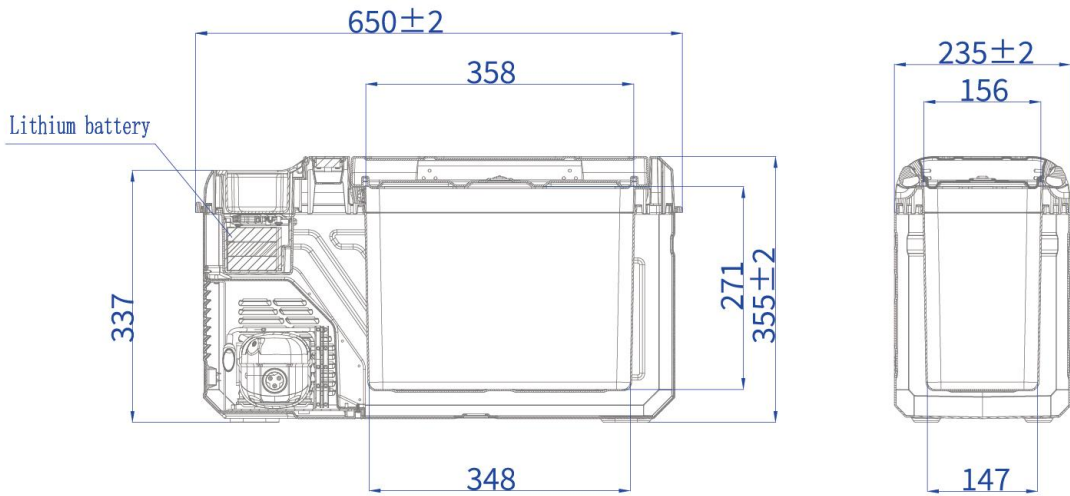


COOLING  
-22-24℃  
TA: 32℃(no load)



C052-018

- 1.Voltage:DC 12-24V and AC 100V-240V (with an adapter)
- 2.Volume:18 Litre
- 3.Cooling:-22-24℃(ambient temperature 32℃,no load)

|                             |                                    |
|-----------------------------|------------------------------------|
| Inner Size:486*263*238(mm)  | Outer Size:664*346*345(mm)         |
| Carton Size:683*406*405(mm) |                                    |
| N.W/G.W(KGS):13.04/14.76    | QTY/20"/40"/40"HC(PCS):220/445/534 |

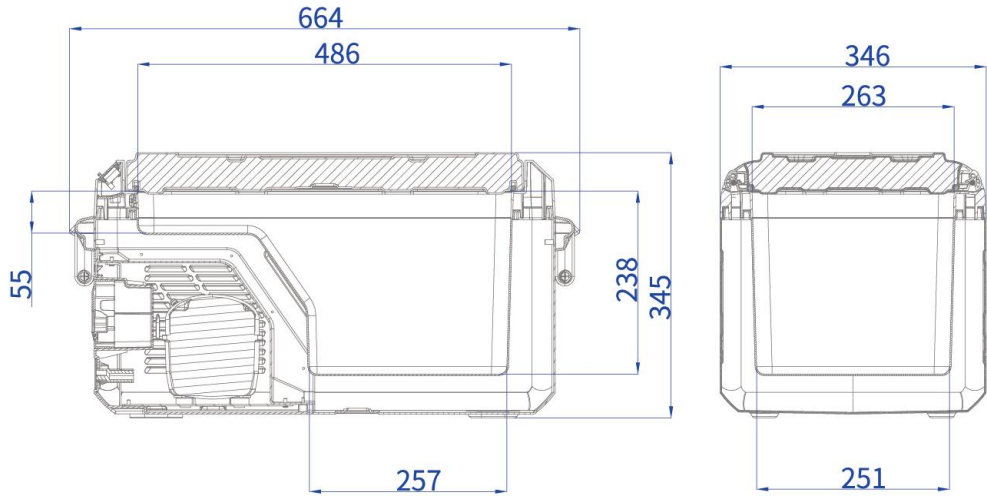



COOLING  
-22-24°C  
TA: 32°C(no load)

COOLING  
-22-24°C  
TA: 32°C(no load)



C052-025

- 1.Voltage:DC 12-24V and AC 100V-240V (with an adapter)
- 2.Volume:25 Litre
- 3.Cooling:-22-24°C(ambient temperature 32°C,no load)



|                             |                                    |
|-----------------------------|------------------------------------|
| Inner Size:486*263*293(mm)  | Outer Size:664*346*400(mm)         |
| Carton Size:683*406*460(mm) |                                    |
| N.W/G.W(KGS):13.5/16.6      | QTY/20"/40"/40"HC(PCS):205/418/475 |



C052-032

- 1.Voltage:DC 12-24V and AC 100V-240V (with an adapter)
- 2.Volume:35 Litre
- 3.Cooling:-22-24°C(ambient temperature 32°C,no load)

|                             |                                    |
|-----------------------------|------------------------------------|
| Inner Size:486*263*348(mm)  | Outer Size:664*346*455(mm)         |
| Carton Size:683*406*515(mm) |                                    |
| N.W/G.W(KGS):14.2/15.9      | QTY/20"/40"/40"HC(PCS):176/356/445 |

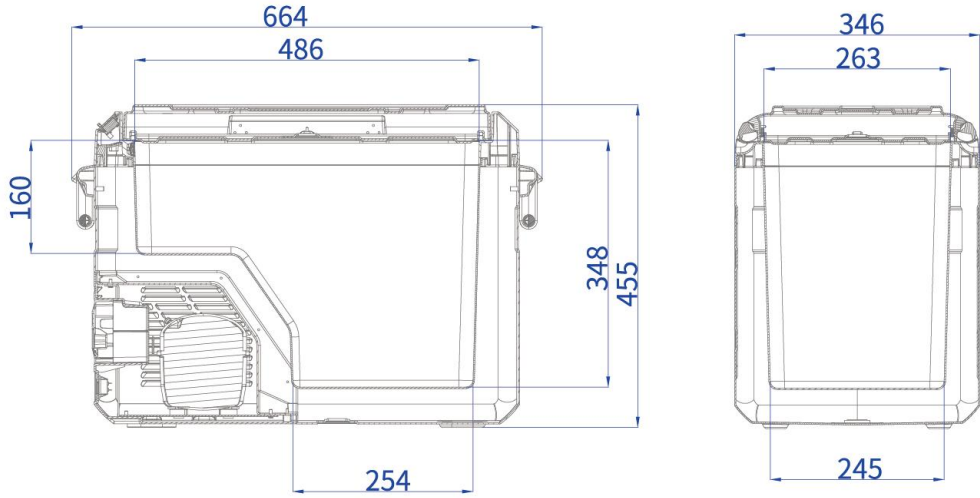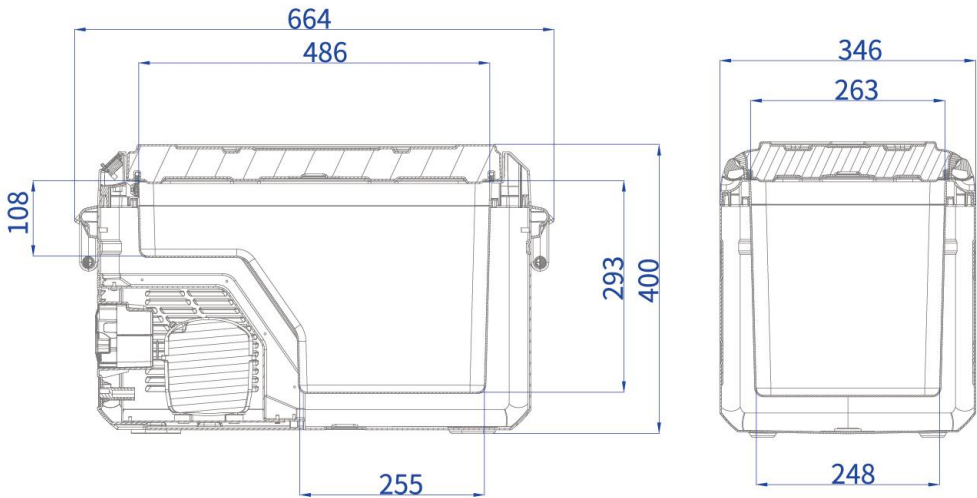



COOLING  
-22-24°C



TA: 32°C(no load)



C052-040

- 1.Voltage:DC 12-24V and AC 100V-240V (with an adapter)
- 2.Volume:40 Litre
- 3.Cooling:-22-24°C(ambient temperature 32°C,no load)

|                             |                                    |
|-----------------------------|------------------------------------|
| Inner Size:510*323*332(mm)  | Outer Size:689*406*440(mm)         |
| Carton Size:733*481*501(mm) |                                    |
| N.W/G.W(KGS):16.6/18.6      | QTY/20"/40"/40"HC(PCS):144/288/360 |

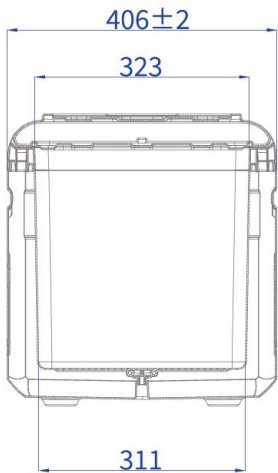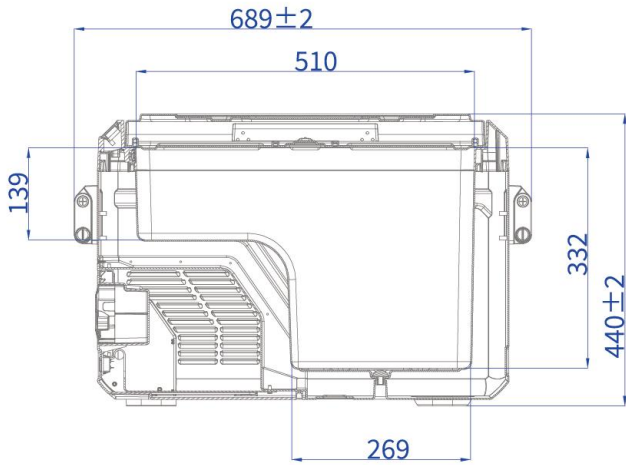

COOLING  
-22-24°C



TA: 32°C(no load)



C053-040

- 1.Voltage:DC 12-24V and AC 100V-240V (with an adapter)
- 2.Volume:40 Litre
- 3.Cooling:-20-20°C(ambient temperature 32°C,no load)

|                            |                                    |
|----------------------------|------------------------------------|
| Area1 Size:323*284*334(mm) | Area2 Size:323*194*150(mm)         |
| Outer Size:708*323*440(mm) | Carton Size:733*481*501(mm)        |
| N.W/G.W(KGS):20.5/22.8     | QTY/20"/40"/40"HC(PCS):144/288/360 |

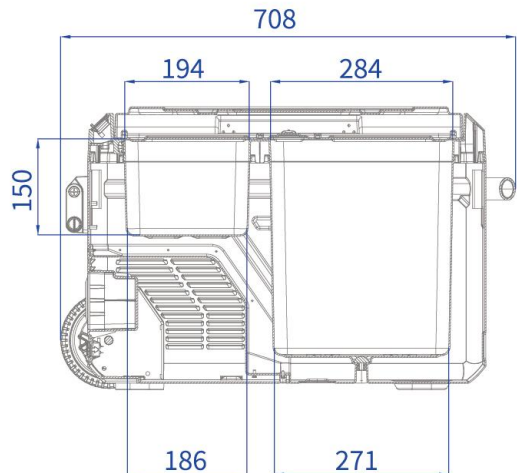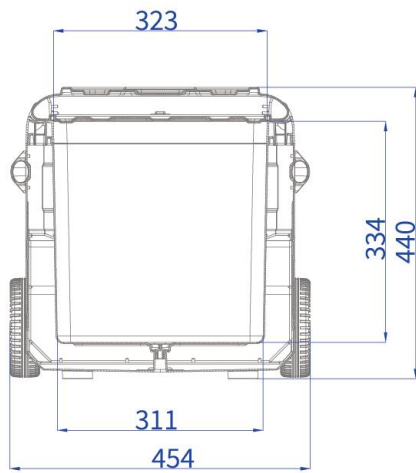

The handle and wheels in the picture are options  
Not standard





COOLING  
-22-24°C  
TA: 32°C(no load)



C052-050

- 1.Voltage:DC 12-24V and AC 100V-240V (with an adapter)
- 2.Volume:50 Litre
- 3.Cooling:-22-24°C(ambient temperature 32°C,no load)

|                             |                                    |
|-----------------------------|------------------------------------|
| Inner Size:510*323*400(mm)  | Outer Size:689*406*505(mm)         |
| Carton Size:733*481*566(mm) |                                    |
| N.W/G.W(KGS):17.6/19.7      | QTY/20"/40"/40*HC(PCS):136/280/280 |

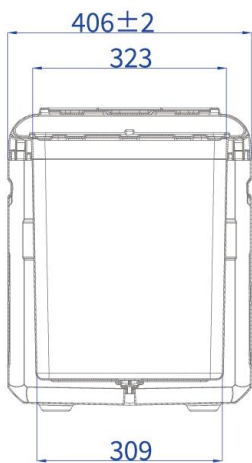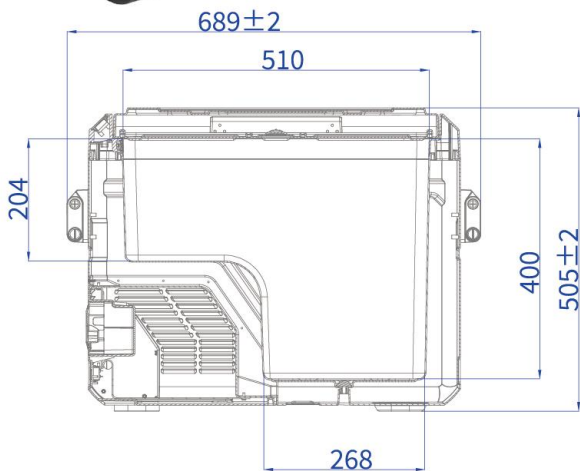




COOLING  
-20-20°C  
TA: 32°C(no load)



C053-050

- 1.Voltage:DC 12-24V and AC 100V-240V (with an adapter)
- 2.Volume:50 Litre
- 3.Cooling:-20-20°C(ambient temperature 32°C,no load)

|                            |                                    |
|----------------------------|------------------------------------|
| Area1 Size:323*284*401(mm) | Area2 Size:323*194*212(mm)         |
| Outer Size:708*323*505(mm) | Carton Size:733*481*566(mm)        |
| N.W/G.W(KGS):22.7/25.7     | QTY/20"/40"/40*HC(PCS):136/280/280 |

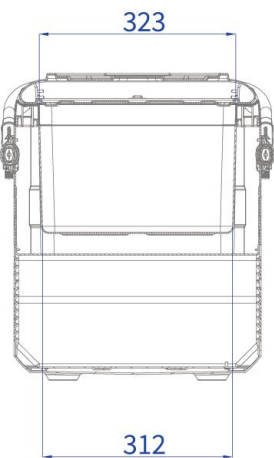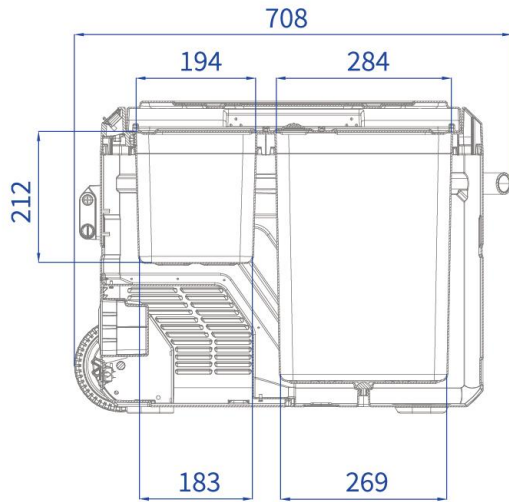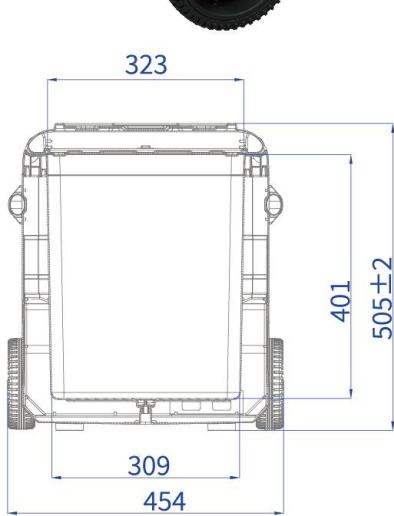

The handle and wheels in the picture are options ,  
Not standard





COOLING  
-22-24℃  
TA: 32℃(no load)



C052-060

- 1.Voltage:DC 12-24V and AC 100V-240V (with an adapter)
- 2.Volume:60 Litre
- 3.Cooling:-22-24℃(ambient temperature 32℃,no load)

|                             |                                     |
|-----------------------------|-------------------------------------|
| Inner Size:510*323*464(mm)  | Outer Size:689*406*570(mm)          |
| Carton Size:733*481*631(mm) |                                     |
| N.W/G.W(KGS):18.1/20.6      | QTY/20"/40"/40"H(C/PCS):102/210/280 |

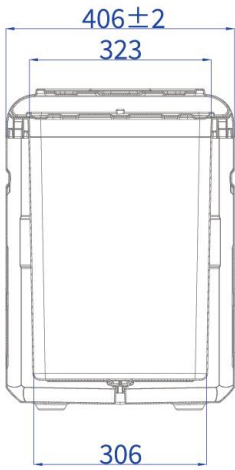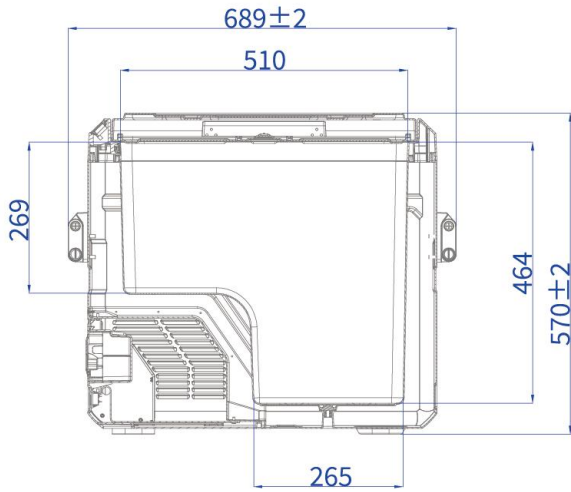




COOLING  
-20-20℃  
TA: 32℃(no load)



C053-060

- 1.Voltage:DC 12-24V and AC 100V-240V (with an adapter)
- 2.Volume:60 Litre
- 3.Cooling:-20-20℃(ambient temperature 32℃,no load)

|                            |                                     |
|----------------------------|-------------------------------------|
| Area1 Size:323*284*465(mm) | Area2 Size:323*194*276(mm)          |
| Outer Size:708*323*570(mm) | Carton Size:733*481*631(mm)         |
| N.W/G.W(KGS):22/25         | QTY/20"/40"/40"H(C/PCS):102/210/280 |

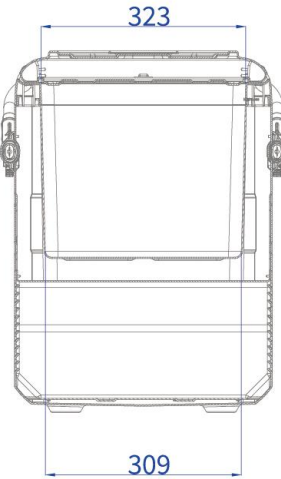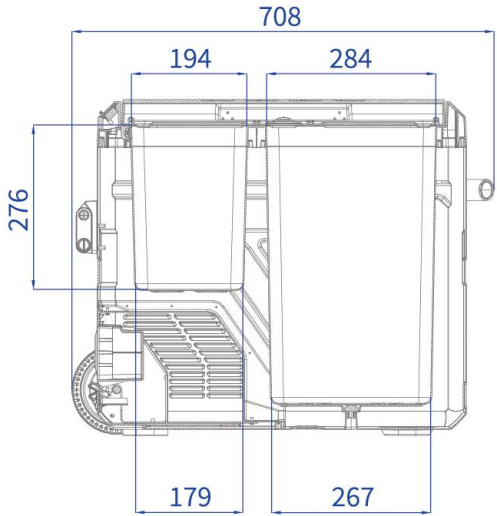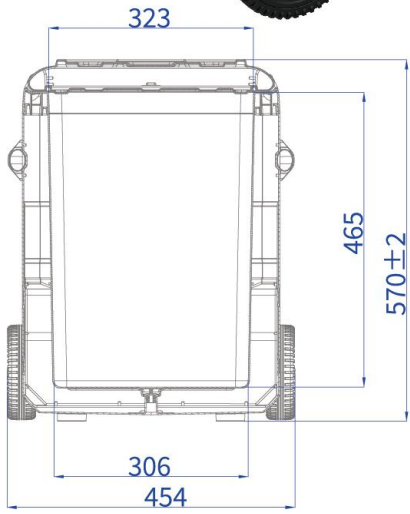





COMPRESSOR FRIDGE  
APPLY TO  
CAR, OUTDOOR, CAMPING, FAMILY PARTY, FISHING

COMPRESSOR FRIDGE

COOLING  
-20-20°C  
TA: 32°C(no load)



C056-080

- 1.Voltage:DC 12-24V and AC 100V-240V (with an adapter)
- 2.Volume:80 Litre
- 3.Cooling:-20-20°C(ambient temperature 32°C,no load)

|                                   |                                                  |
|-----------------------------------|--------------------------------------------------|
| Area1 Size:303*382*355(mm)        | Area2 Size:303*382*355(mm)                       |
| Outer Size:1066*482*473(mm)       | Outer Size:1153*528*473(mm)(with pull bar)       |
| Carton Size:1111*558*538(mm)      | Carton Size:1201*580*538(mm)(with pull bar)      |
| N.W/G.W(KGS):23.4/26.4            |                                                  |
| QTY/20"/40"/40"HC(PCS):80/168/168 | QTY/20"/40"/40"HC(PCS):56/116/116(with pull bar) |



The handle and wheels in the picture are options.  
Not standard.





Bluetooth App



USB+TYPE C Charging Port



Lithium Battery + Solar Charging Port



Removable Wire Basket



Double Temperature and Control



Wear Resistant Wheels



Three handle options



lid design options





Adapter



DC power cable



USB + Type-C  
Charging Cable



Connector



Portable battery




Fridge Stand



Slide



Insulated bag

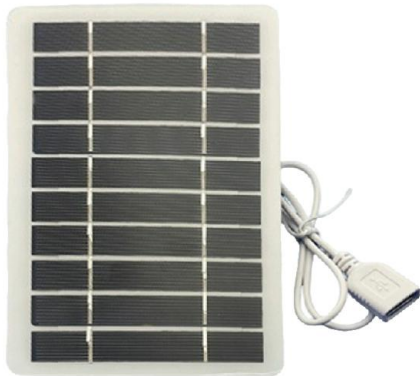

Solar panel



Basket



Detachable battery





COOLING  
-18℃  
TA: 25℃(No Load)



CFP-35L  
COMPRESSOR FRIDGE

- 1.Voltage:DC 12-24V and AC 100V-240V (with an adapter)
- 2.Volume:35 Litre
- 3.Power :55W±10%

|                            |                                      |
|----------------------------|--------------------------------------|
| Outer Size:620*344*375(mm) | Carton Size:670*395*445(mm)          |
| Inner Size:370*284*300(mm) | PACKING:1PC/CTN                      |
| N.W/G.W(KGS):12.5/14.5     | QTY/20"/40"/40"(HC)(PCS):150/315/420 |



CFP-45L  
COMPRESSOR FRIDGE

- 1.Voltage:DC 12-24V and AC 100V-240V (with an adapter)
- 2.Volume:45 Litre
- 3.Power :55W±10%

|                            |                                      |
|----------------------------|--------------------------------------|
| Outer Size:622*346*480(mm) | Carton Size:670*395*550(mm)          |
| Inner Size:373*284*407(mm) | PACKING:1PC/CTN                      |
| N.W/G.W(KGS):13.5/15       | QTY/20"/40"/40"(HC)(PCS):126/270/360 |



COOLING  
-20℃  
TA: 32℃(No Load)



CFP-20L  
COMPRESSOR FRIDGE

- 1.Voltage:DC 12-24V and AC 100V-240V (with an adapter)
- 2.Volume:20 Litre
- 3.Power :45W±10%

|                            |                                      |
|----------------------------|--------------------------------------|
| Outer Size:438*365*405(mm) | Carton Size:505*435*470(mm)          |
| Inner Size:330*267*311(mm) | PACKING:1PC/CTN                      |
| N.W/G.W(KGS):11.5/13.5     | QTY/20"/40"/40"(HC)(PCS):285/590/690 |



CFP-30L  
COMPRESSOR FRIDGE

- 1.Voltage:DC 12-24V and AC 100V-240V (with an adapter)
- 2.Volume:30 Litre
- 3.Power :50W±10%

|                            |                                      |
|----------------------------|--------------------------------------|
| Outer Size:438*365*505(mm) | Carton Size:505*435*570(mm)          |
| Inner Size:330*267*411(mm) | PACKING:1PC/CTN                      |
| N.W/G.W(KGS):12.5/14.5     | QTY/20"/40"/40"(HC)(PCS):250/510/600 |



COOLING  
-18℃  
TA: 25℃(No Load)



CBP-C-25L  
COMPRESSOR FRIDGE

- 1.Voltage:DC 12-24V and AC 100V-240V (with an adapter)
- 2.Volume:23 Litre
- 3.Power consumption:55W±10%

|                                |                                    |
|--------------------------------|------------------------------------|
| Outer Size:583*365*344(mm)     | Inner Size:283*284*267(mm)         |
| Inner Box Size:672*448*432(mm) | Carton Size:690*465*450(mm)        |
| PACKING:1PC/Inner Box 1PC/CTN  |                                    |
| N.W/G.W(KGS):13/14             | QTY/20"/40"/40"HC(PCS):170/380/450 |



CBP-C-35L  
COMPRESSOR FRIDGE

- 1.Voltage:DC 12-24V and AC 100V-240V (with an adapter)
- 2.Volume:32 Litre
- 3.Power consumption:55W±10%

|                                |                                    |
|--------------------------------|------------------------------------|
| Outer Size:583*365*434(mm)     | Inner Size:283*284*357(mm)         |
| Inner Box Size:672*448*522(mm) | Carton Size:690*465*540(mm)        |
| PACKING:1PC/Inner Box 1PC/CTN  |                                    |
| N.W/G.W(KGS):14/15             | QTY/20"/40"/40"HC(PCS):150/320/380 |



CAMPING COOLER BOX  
APPLY TO  
CAR, OUTDOOR , CAMPING , FAMILY PARTY , FISHING








CBP-25L-B

- 1.Volume:25 Litre
- 2.Insulation layer:PU Foam
- 3.Cooling:18±2°C(ambient temperature 32°C,no load)
- 4.Using decibel:<45dB±10%

|                                |                                    |
|--------------------------------|------------------------------------|
| Inner Size:340X227X342(mm)     | Carton Size:387x318x452(mm)        |
| PACKING:1PC/Inner Box 1PCS/CTN |                                    |
| N.W/G.W(KGS):4.9/5.8           | QTY/20"/40"/40"HC(PCS):450/920/990 |

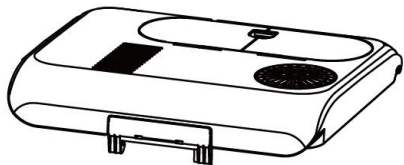

Top Door Cover Option 1



Top Door Cover Option 2



CBP-30L-A

- 1.Volume:30 Litre
- 2.Insulation layer:PU Foam
- 3.Cooling:18±2°C(ambient temperature 32°C,no load)
- 4.Using decibel:<45dB±10%

|                                |                                    |
|--------------------------------|------------------------------------|
| Inner Size:340X227X402(mm)     | Carton Size:442x302x500(mm)        |
| PACKING:1PC/Inner Box 1PCS/CTN |                                    |
| N.W/G.W(KGS):5.9/6.6           | QTY/20"/40"/40"HC(PCS):380/800/900 |



CBP-40L-A

- 1.Volume:40 Litre
- 2.Insulation layer:PU Foam
- 3.Cooling:18±2°C(ambient temperature 32°C,no load)
- 4.Using decibel:<45dB±10%

|                                |                                    |
|--------------------------------|------------------------------------|
| Inner Size:410X251X402(mm)     | Carton Size:525x332x514(mm)        |
| PACKING:1PC/Inner Box 1PCS/CTN |                                    |
| N.W/G.W(KGS):7.7/8.3           | QTY/20"/40"/40"HC(PCS):240/530/655 |





COOLING  
5-10℃  
TA: 25℃



CBP-14L-A  
THERMOELECTRIC COOLER AND WARMER

- 1.Voltage:DC 12V
- 2.Volume:14 Litre
- 3.Power consumption:48W±10%

|                                |                                      |
|--------------------------------|--------------------------------------|
| Inner Size:342X233X448mm)      | Carton Size:357X248X468(mm)          |
| PACKING:1PC/Inner Box 1PCS/CTN |                                      |
| N.W/G.W(KGS):3.5/4.5           | QTY/20"/40"/40"HC(PCS):720/1460/1690 |


COOLING  
5-10℃  
TA: 25℃



CBP-20L-A  
THERMOELECTRIC COOLER AND WARMER


- 1.Voltage:DC 12V
- 2.Volume:20 Litre
- 3.Power consumption:48W±10%

|                                |                                       |
|--------------------------------|---------------------------------------|
| Inner Size:342X293X448(mm)     | Carton Size:357X308X468mm)            |
| PACKING:1PC/Inner Box 1PCS/CTN |                                       |
| N.W/G.W(KGS):4.2/5.5           | QTY/20"/40"/40"HC(PCS):590/ 1200/1370 |

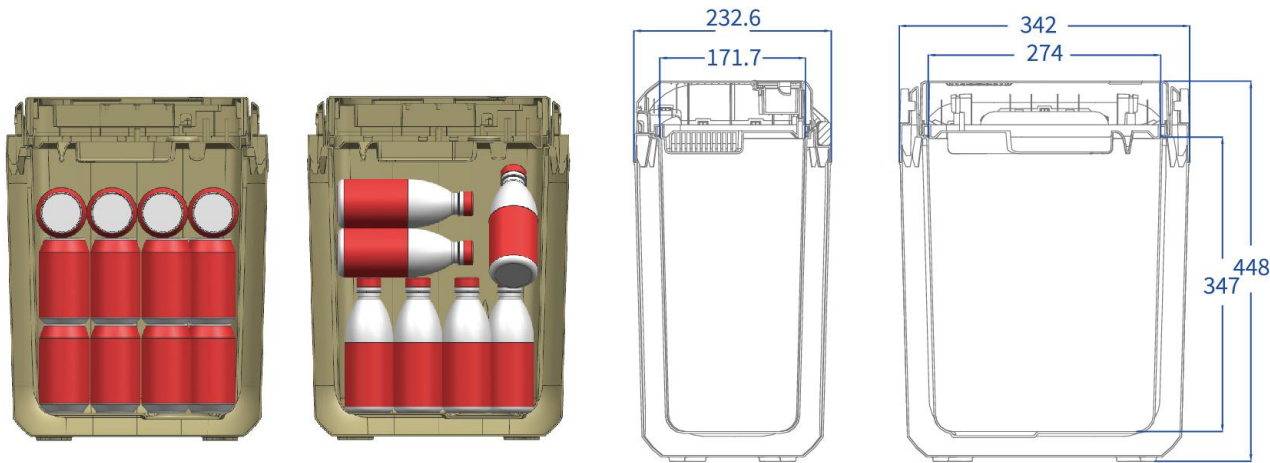

**12 BOTTLES\***  
380ml Water

**18 CANS\***  
330ml Cola

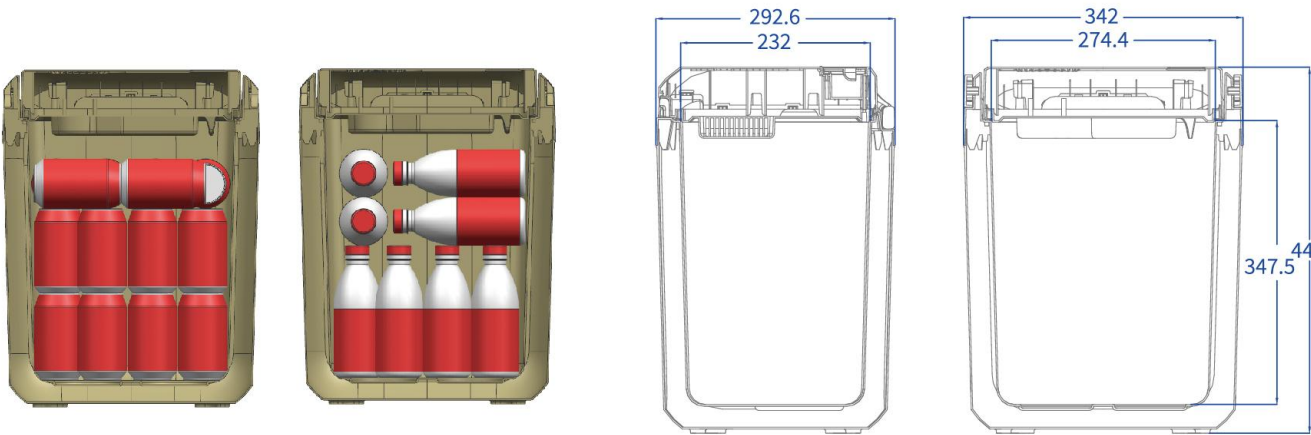

**19 BOTTLES\***  
380ml Water

**28 CANS\***  
330ml Cola





COOLING  
5-10℃

TA: 25℃



NEW

# CBP-30L-C

THERMOELECTRIC COOLER AND WARMER

- 1.Voltage:DC 12V and AC 220-240V
- 2.Volume:30 Litre
- 3.Power consumption:48W±10%

|                                |                                      |
|--------------------------------|--------------------------------------|
| Inner Size:388X318X502(mm)     | Carton Size:403X333X522mm)           |
| PACKING:1PC/Inner Box 1PCS/CTN |                                      |
| N.W/G.W(KGS):5.0/6.0           | QTY/20"/40"/40"H(C/PCS):420/860/1000 |

COOLING  
5-10℃

TA: 25℃




NEW

# CBP-40L-C

THERMOELECTRIC COOLER AND WARMER


- 1.Voltage:DC 12V and AC 220-240V
- 2.Volume:40 Litre
- 3.Power consumption:48W±10%

|                                |                                     |
|--------------------------------|-------------------------------------|
| Inner Size:552X359X484(mm)     | Carton Size:567X374X504mm)          |
| PACKING:1PC/Inner Box 1PCS/CTN |                                     |
| N.W/G.W(KGS):6.0/7.5           | QTY/20"/40"/40"H(C/PCS):280/570/670 |

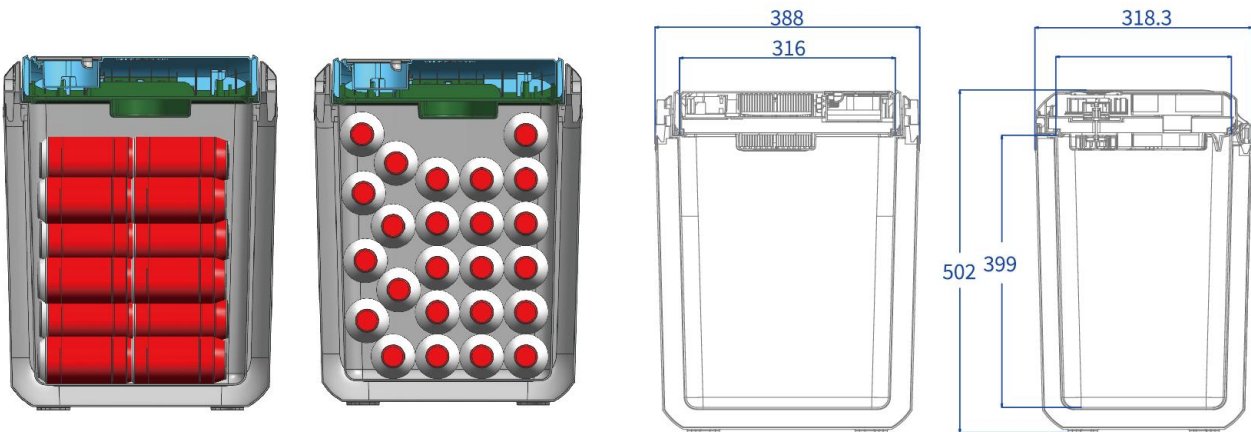

**24 BOTTLES\***  
380ml Water

**36 CANS\***  
330ml Cola

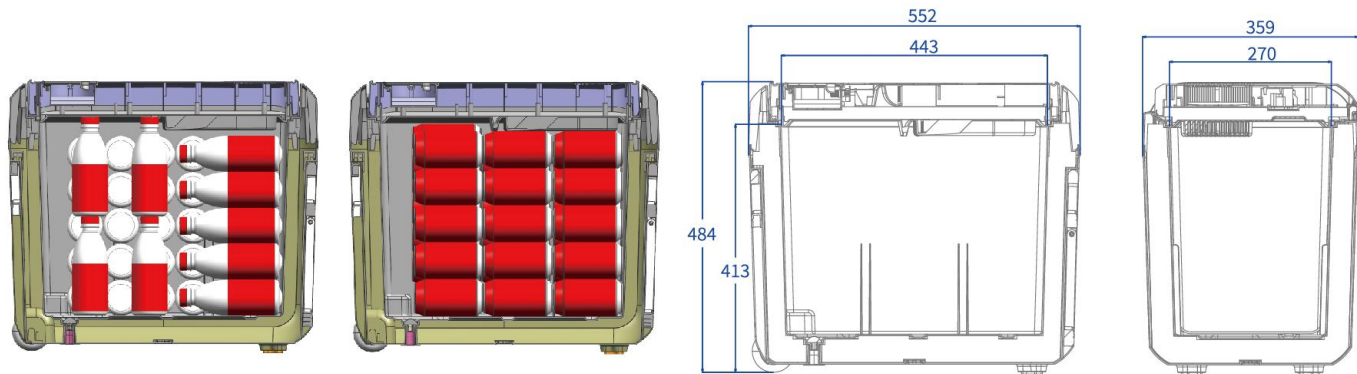

**46 BOTTLES\***  
380ml Water

**49 CANS\***  
330ml Cola





HEATING

50-60℃

COOLING

5-8℃

TA: 25℃







# CBP-8L-1

THERMOELECTRIC COOLER AND WARMER

- 1.Voltage:DC 12V
- 2.Volume:8 Litre
- 3.Power consumption:50W±10%

|                                  |                                      |
|----------------------------------|--------------------------------------|
| Inner Box Size:209.5*455*299(mm) | Carton Size:419*465*598(mm)          |
| PACKING:1PC/Inner Box 4PCS/CTN   |                                      |
| N.W/G.W(KGS):11/13               | QTY/20"/40"/40"HC(PCS):960/1980/2330 |

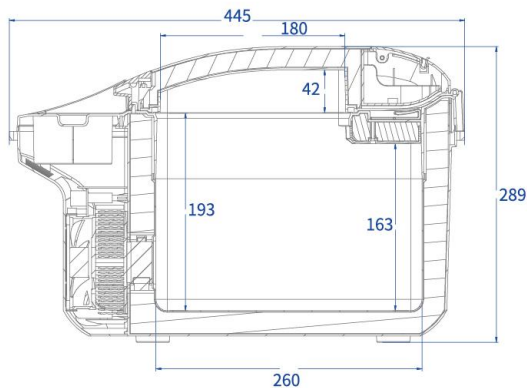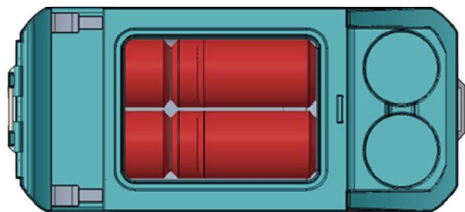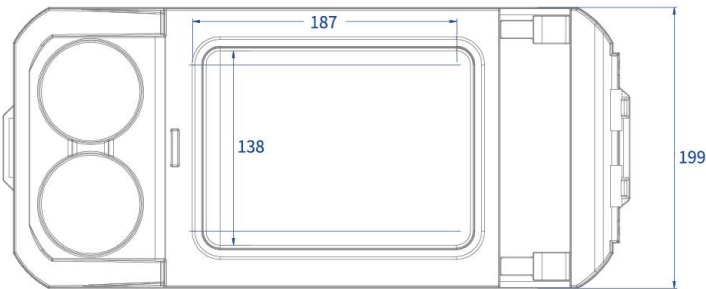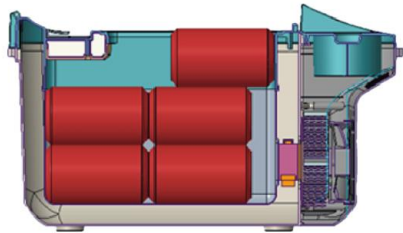

- 6 BOTTLES\***  
380ml Water
- 9 CANS\***  
330ml Cola



COOLING

5-10℃

TA: 25℃







# CBP-25L-1

THERMOELECTRIC COOLER AND WARMER

- 1.Voltage:DC 12V and AC 220V-240V or AC 100-120V
- 2.Volume:25 Litre
- 3.Power consumption:48W±10%

|                                |                                     |
|--------------------------------|-------------------------------------|
| Inner Box Size:393*324*457(mm) | Carton Size:410*341*476(mm)         |
| PACKING:1PC/Inner Box 1PC/CTN  |                                     |
| N.W/G.W(KGS):4.5/5.5           | QTY/20"/40"/40"HC(PCS):440/880/1020 |

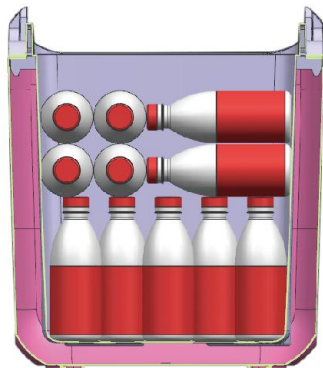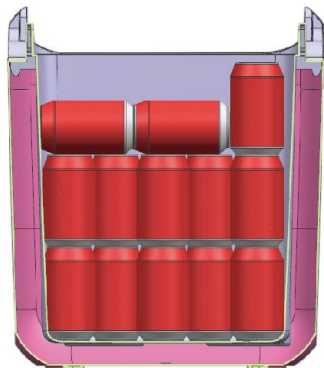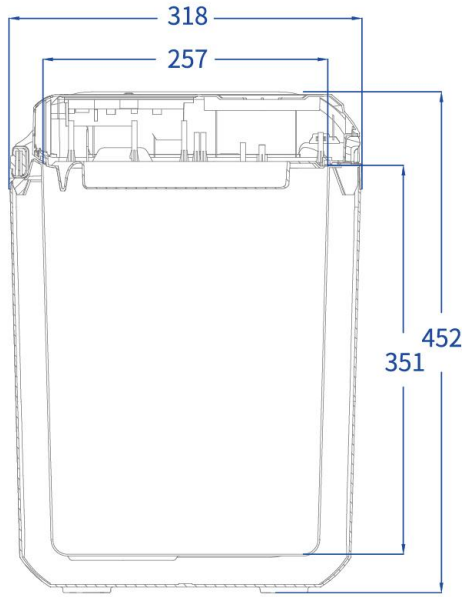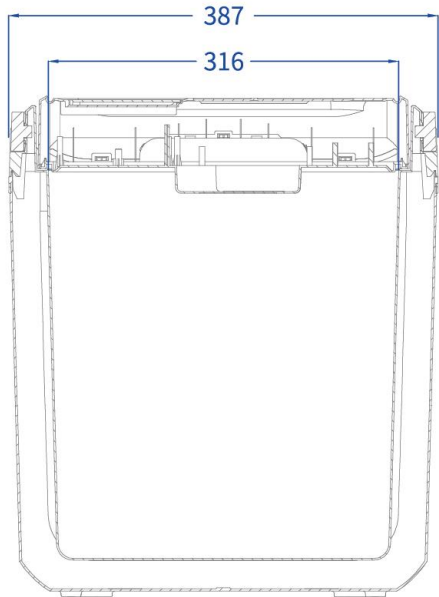

- 23 BOTTLES\***  
380ml Water
- 35 CANS\***  
330ml Cola





**CBP-33L**(Digital Display)  
THERMOELECTRIC COOLER AND WARMER

- 1.Voltage:DC 12V and AC 220V-240V or AC 100-120V
- 2.Volume:32 Litre
- 3.Power consumption:48W±10%

|                                |                                    |
|--------------------------------|------------------------------------|
| Inner Box Size:452*355*457(mm) | Carton Size:470*370*470(mm)        |
| PACKING:1PC/Inner Box 1PC/CTN  |                                    |
| N.W/G.W(KGS):5.5/6.5           | QTY/20"/40"/40*HC(PCS):240/500/860 |

**CBP-33L-A**  
THERMOELECTRIC COOLER AND WARMER


- 1.Voltage:DC 12V and AC 220V-240V or AC 100-120V
- 2.Volume:32 Litre
- 3.Power consumption:48W±10%

|                                |                                    |
|--------------------------------|------------------------------------|
| Inner Box Size:452*355*457(mm) | Carton Size:470*370*470(mm)        |
| PACKING:1PC/Inner Box 1PC/CTN  |                                    |
| N.W/G.W(KGS):5.5/6.5           | QTY/20"/40"/40*HC(PCS):240/500/860 |



 **27 BOTTLES\***  
380ml Water

 **40 CANS\***  
330ml Cola

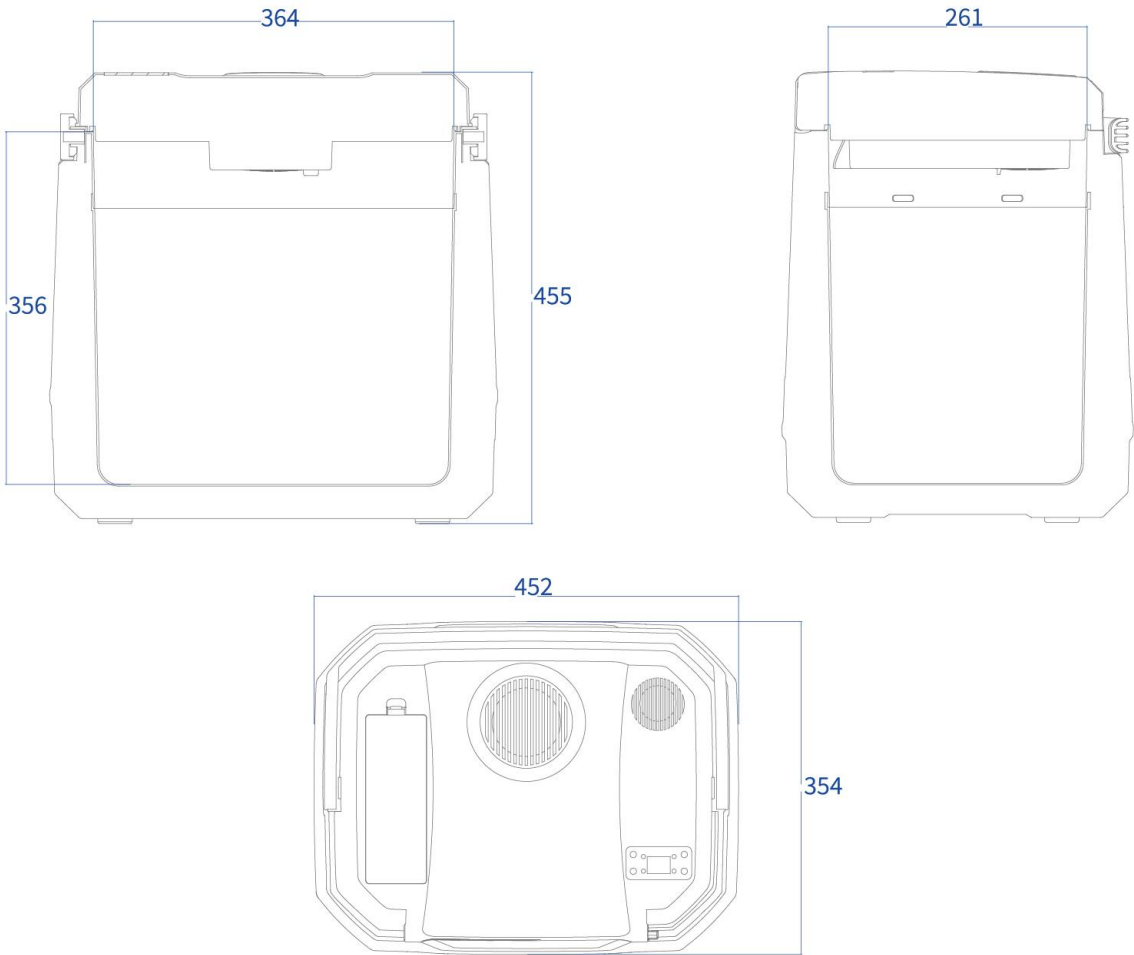



HEATING

50-65℃

COOLING

5-8℃

TA: 25℃



CBP-8L

- 1.Voltage:DC 12V and AC 220V-240V or AC 100-120V
- 2.Volume:8 Litre
- 3.Power consumption:48W±10%





|                                |                                      |
|--------------------------------|--------------------------------------|
| Inner Box Size:410*235*325(mm) | Carton Size:490*425*670(mm)          |
| PACKING:1PC/Inner Box 4PCS/CTN |                                      |
| N.W/G.W(KGS):11/13             | QTY/20"/40"/40"HC(PCS):800/1600/1900 |



6 BOTTLES\*  
380ml Water



9 CANS\*  
330ml Cola

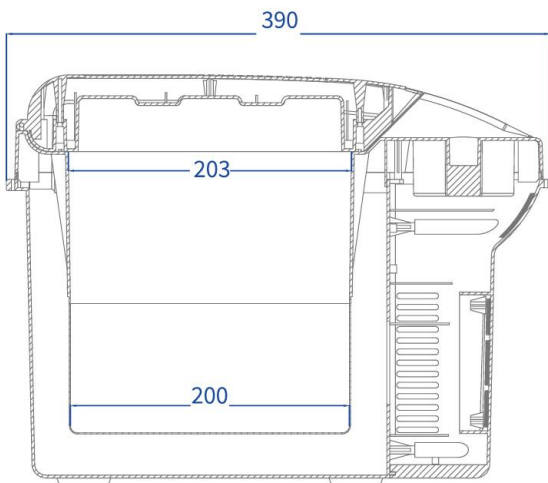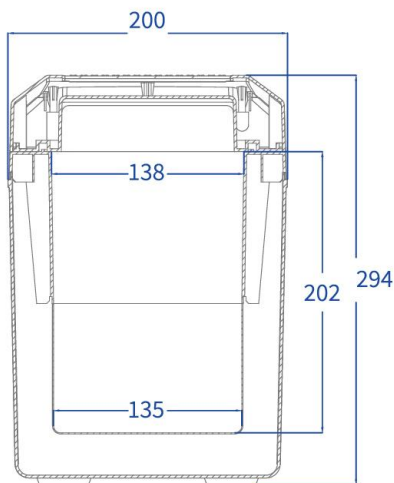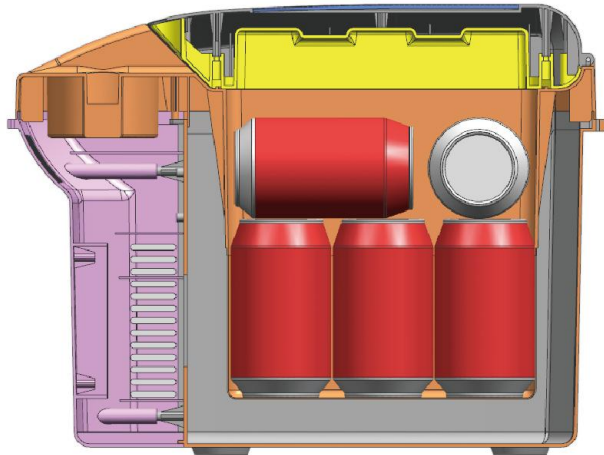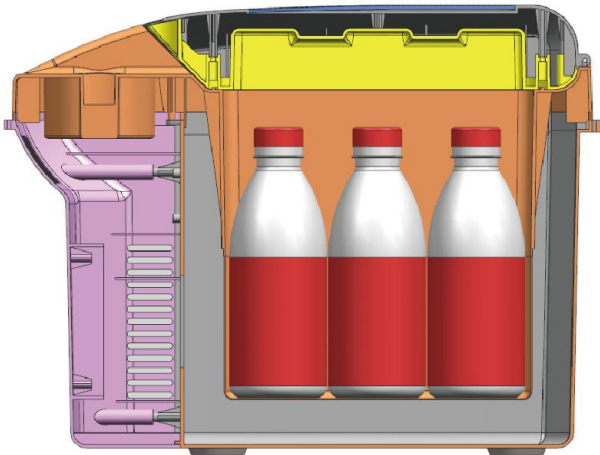

HEATING

50-65℃

COOLING

0-5℃

TA: 25℃



CBP-18L

- 1.Voltage:DC 12V, AC 100V-240V
- 2.Volume:18 Litre
- 3.Power consumption:60W±10%





|                                |                                     |
|--------------------------------|-------------------------------------|
| Inner Box Size:488*340*378(mm) | Carton Size:503*355*393(mm)         |
| PACKING:1PC/Inner Box 1PC/CTN  |                                     |
| N.W/G.W(KGS):5.4/7             | QTY/20"/40"/40"HC(PCS):421/900/1020 |



20 BOTTLES\*  
380ml Water



24 CANS\*  
330ml Cola

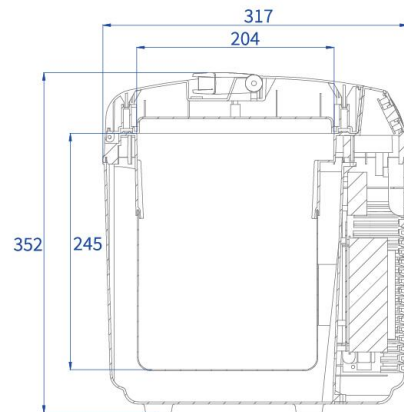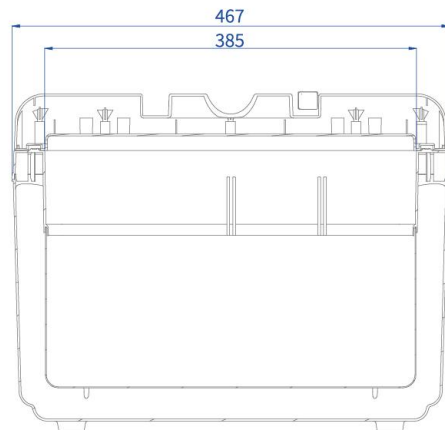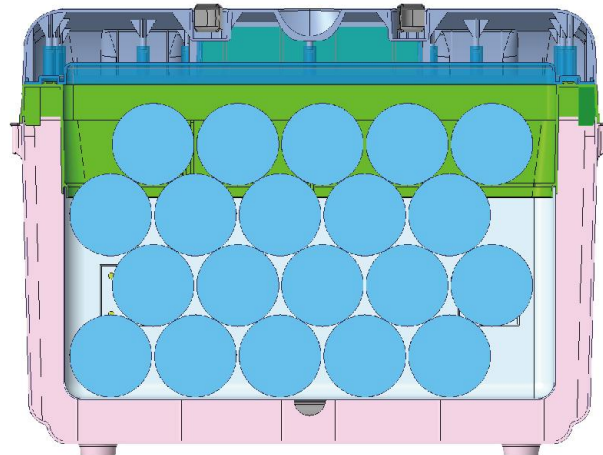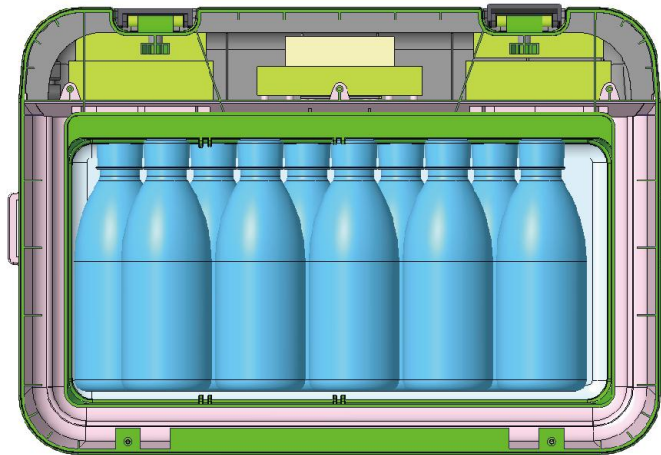



HEATING 50-65℃  
COOLING 5-7℃  
TA: 25℃



CBP-12L

- 1.Voltage:DC 12V and AC 220V-240V or AC 100-120V
- 2.Volume:12 Litre
- 3.Power consumption:50W±10%

|                                |                                      |
|--------------------------------|--------------------------------------|
| Outer Size:495*257*256(mm)     | Inner Size:333*197*178(mm)           |
| Inner Box Size:530*300*300(mm) | Carton Size:620*545*320(mm)          |
| PACKING:1PC/Inner Box 2PCS/CTN |                                      |
| N.W/G.W(KGS):9.5/10            | QTY/20"/40"/40*HC(PCS):500/1030/1200 |

HEATING 50-65℃  
COOLING 0-5℃  
TA: 25℃



CBP-24L-B

- 1.Voltage:DC 12V and AC 220V-240V or AC 100-120V
- 2.Volume:24 Litre
- 3.Power consumption:60W±10%

|                                |                                    |
|--------------------------------|------------------------------------|
| Outer Size:597*313*308(mm)     | Inner Size:410*244*220(mm)         |
| Inner Box Size:597*350*335(mm) | Carton Size:610*365*355(mm)        |
| PACKING:1PC/Inner Box 1PC/CTN  |                                    |
| N.W/G.W(KGS):5.2/7             | QTY/20"/40"/40*HC(PCS):350/730/820 |

HEATING 50-65℃  
COOLING 5-8℃  
TA: 25℃



CBP-30L-A

- 1.Voltage:DC 12V and AC 220V-240V or AC 100-120V
- 2.Volume:30 Litre
- 3.Power consumption:60W±10%

|                                |                                    |
|--------------------------------|------------------------------------|
| Outer Size:597*313*358(mm)     | Inner Size:410*244*270(mm)         |
| Inner Box Size:608*350*386(mm) | Carton Size:620*365*405(mm)        |
| PACKING:1PC/Inner Box 1PC/CTN  |                                    |
| N.W/G.W(KGS):5.8/7.6           | QTY/20"/40"/40*HC(PCS):300/620/700 |





HEATING 50-65℃  
COOLING 5-8℃  
TA: 25℃





CBP-21L

- 1.Voltage:DC 12V and AC 220V-240V or AC 100-120V
- 2.Volume:18 Litre
- 3.Power consumption:48W±10%

|                                |                                      |
|--------------------------------|--------------------------------------|
| Inner Box Size:390*245*445(mm) | Carton Size:500*410*460(mm)          |
| PACKING:1PC/Inner Box 2PCS/CTN |                                      |
| N.W/G.W(KGS):6.5/8.5           | QTY/20"/40"/40"HC(PCS):550/1200/1400 |

12 BOTTLES\* 380ml Water  
20 CANS\* 330ml Cola

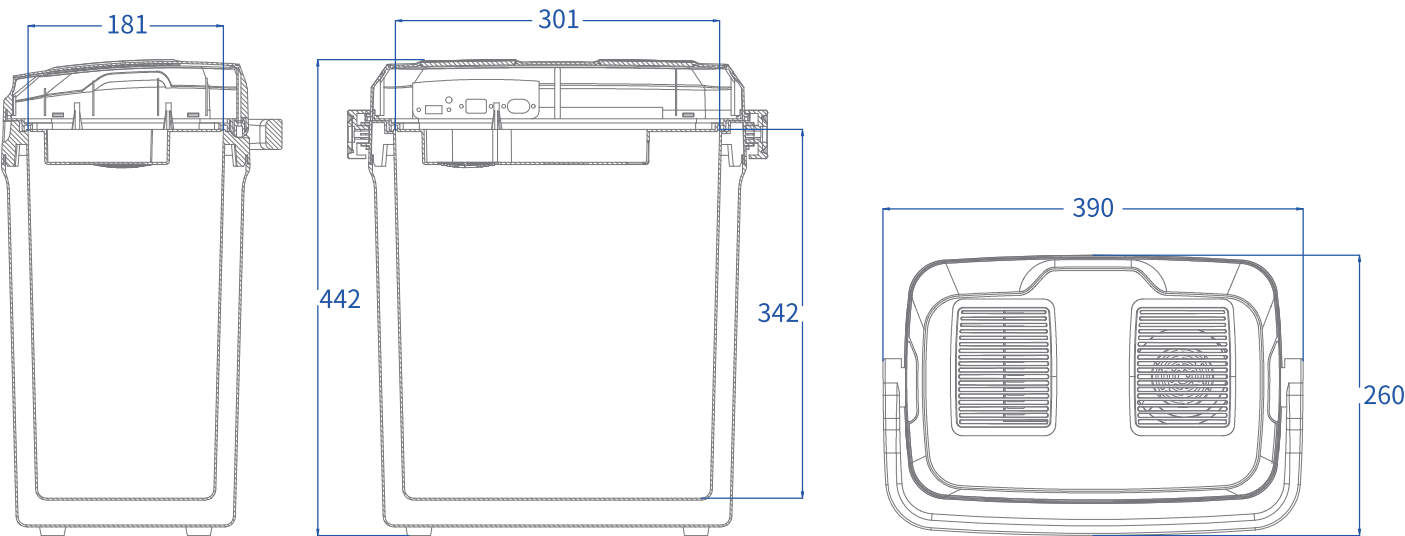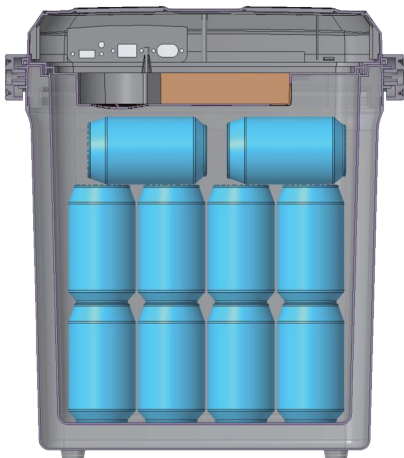

HEATING 50-65℃  
COOLING 5-8℃  
TA: 25℃





CBP-24L


- 1.Voltage:DC 12V and AC 220V-240V or AC 100-120V
- 2.Volume:24 Litre
- 3.Power consumption:48W±10%

|                                |                                      |
|--------------------------------|--------------------------------------|
| Inner Box Size:405*305*453(mm) | Carton Size:630*420*470(mm)          |
| PACKING:1PC/Inner Box 2PCS/CTN |                                      |
| N.W/G.W(KGS):8/10              | QTY/20"/40"/40"HC(PCS):500/1000/1100 |

23 BOTTLES\* 380ml Water  
34 CANS\* 330ml Cola

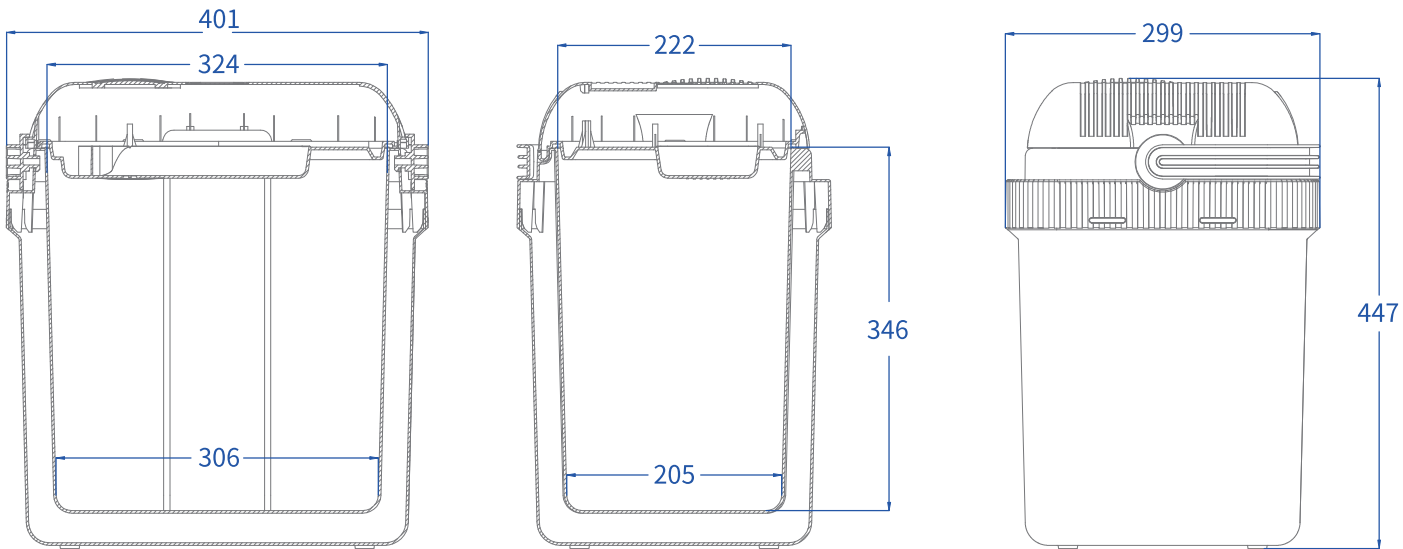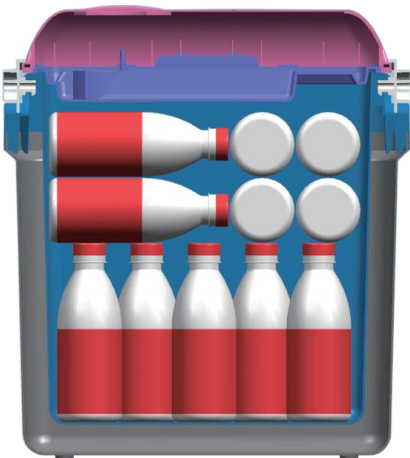





CBP-26L-D

- 1.Voltage:DC 12V and AC 220V-240V or AC 100-120V
- 2.Volume:26 Litre
- 3.Power consumption:48W±10%

|                                |                                      |
|--------------------------------|--------------------------------------|
| Inner Size:300*240*335(mm)     | Inner Box Size:410*325*440(mm)       |
| PACKING:1PC/Inner Box 2PCS/CTN | Carton Size:670*425*455(mm)          |
| N.W/G.W(KGS):7.9/10            | QTY/20"/40"/40"H(C/PCS):500/950/1050 |



CBP-26L-E

- 1.Voltage:DC 12V and AC 220V-240V or AC 100-120V
- 2.Volume:26 Litre
- 3.Power consumption:48W±10%

|                                |                                      |
|--------------------------------|--------------------------------------|
| Inner Size:300*240*335(mm)     | Inner Box Size:410*325*440(mm)       |
| PACKING:1PC/Inner Box 2PCS/CTN | Carton Size:670*425*455(mm)          |
| N.W/G.W(KGS):7.9/10            | QTY/20"/40"/40"H(C/PCS):500/950/1050 |



CBP-26L  
CBP-26L-A( )




CBP-26L-B  
CBP-26L-C( )



CBP-26L-D  
CBP-26L-E( )



CBP-26L-F  
CBP-26L-G( )

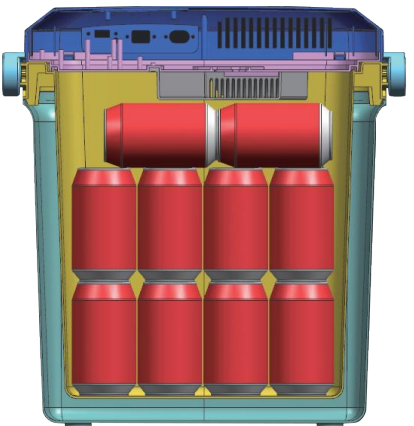

**17 BOTTLES\***  
380ml Water

**30 CANS\***  
330ml Cola





HEATING  
50-65℃  
COOLING  
5-10℃  
TA: 25℃

CBP-29L-D

- 1.Voltage:DC 12V and AC 220V-240V or AC 100-120V
- 2.Volume:29 Litre
- 3.Power consumption:48W±10%

|                                |                                    |
|--------------------------------|------------------------------------|
| Inner Size:300*240*350(mm)     | Inner Box Size:410*325*485(mm)     |
| PACKING:1PC/Inner Box 2PCS/CTN | Carton Size:665*425*500(mm)        |
| N.W/G.W(KGS):8.2/11.5          | QTY/20"/40"/40"HC(PCS):400/800/920 |



CBP-29L-E

- 1.Voltage:DC 12V and AC 220V-240V or AC 100-120V
- 2.Volume:29 Litre
- 3.Power consumption:48W±10%

|                                |                                    |
|--------------------------------|------------------------------------|
| Inner Size:300*240*350(mm)     | Inner Box Size:410*325*485(mm)     |
| PACKING:1PC/Inner Box 2PCS/CTN | Carton Size:665*425*500(mm)        |
| N.W/G.W(KGS):8.2/11.5          | QTY/20"/40"/40"HC(PCS):400/800/920 |



CBP-29L  
CBP-29L-A( )





CBP-29L-B  
CBP-29L-C( )



CBP-29L-D  
CBP-29L-E( )



CBP-29L-F  
CBP-29L-G( )

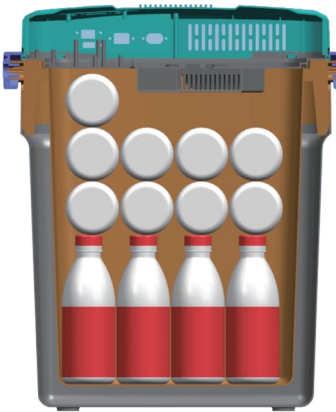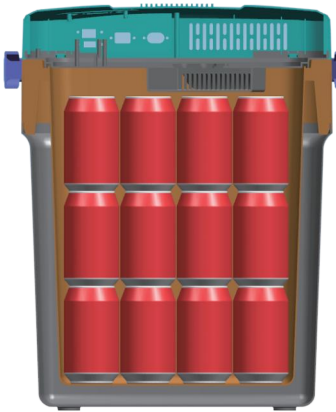


21 BOTTLES\*  
380ml Water

36 CANS\*  
330ml Cola



HEATING 50-65℃  
COOLING 8-10℃  
TA: 25℃

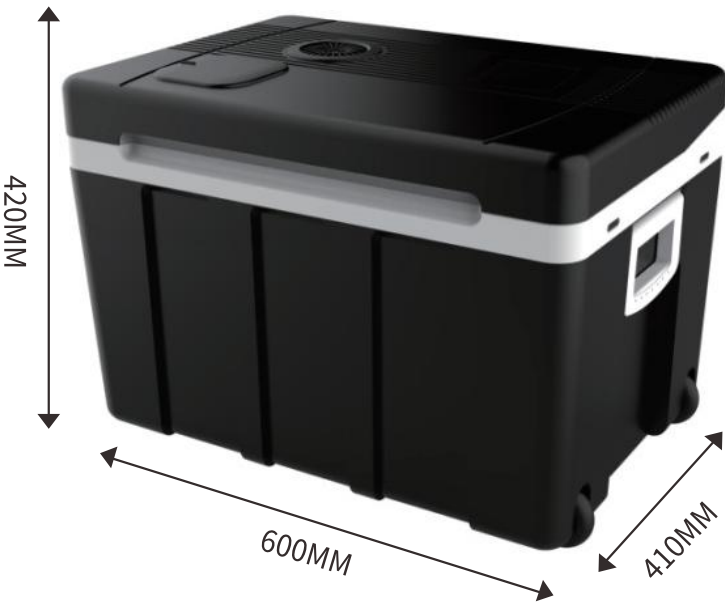

CBP-50L

- 1.Voltage:DC 12V and AC 220V-240V or AC 100-120V
  - 2.Volume:50 Litre
  - 3.Power consumption:48W±10%
- |                               |                                    |
|-------------------------------|------------------------------------|
| Inner Size:495*335*330(mm)    | Inner Box Size:615*420*435(mm)     |
| PACKING:1PC/Inner Box 1PC/CTN | Carton Size:630*435*450(mm)        |
| N.W/G.W(KGS):7.5/8.5          | QTY/20"/40"/40*HC(PCS):220/450/550 |



HEATING 50-65℃  
COOLING 8-10℃  
TA: 25℃



CBP-50L-D(Double Cooling)

- 1.Voltage:DC 12V and AC 220V-240V or AC 100-120V
  - 2.Volume:50 Litre
  - 3.Power consumption:60W±10%
- |                               |                                    |
|-------------------------------|------------------------------------|
| Inner Size:303*477*347(mm)    | Inner Box Size:635*465*565(mm)     |
| PACKING:1PC/Inner Box 1PC/CTN | Carton Size:650*480*580(mm)        |
| N.W/G.W(KGS):8.7/9.8          | QTY/20"/40"/40*HC(PCS):150/300/360 |



CBP-50L-E(Double Cooling)

- 1.Voltage:DC 12V and AC 220V-240V or AC 100-120V
  - 2.Volume:50 Litre
  - 3.Power consumption:60W±10%
- |                               |                                    |
|-------------------------------|------------------------------------|
| Inner Size:303*477*347(mm)    | Inner Box Size:635*465*565(mm)     |
| PACKING:1PC/Inner Box 1PC/CTN | Carton Size:650*480*580(mm)        |
| N.W/G.W(KGS):8.7/9.8          | QTY/20"/40"/40*HC(PCS):150/300/360 |




NINGBO ICEBERG ELECTRONIC APPLIANCE CO.,LTD.

CERTIFICATE



SCAN ISO9001 ISO45001 ISO14001

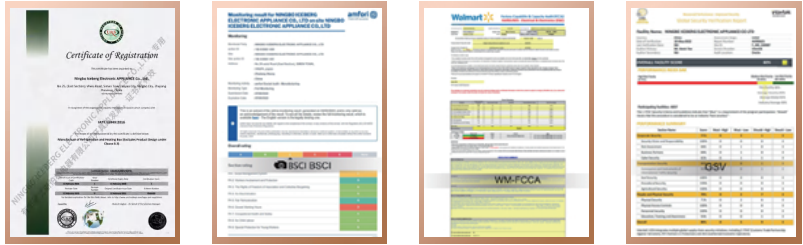

IATF16949 BSCI FCCA GSV

CERTIFICATE OF FACTORY MANAGEMENT SYSTEM




REACH ROHS FDA DOE



ERP LFGB CA65 EPR EPR

CERTIFICATE OF ENERGY AND FOOD SAFETY

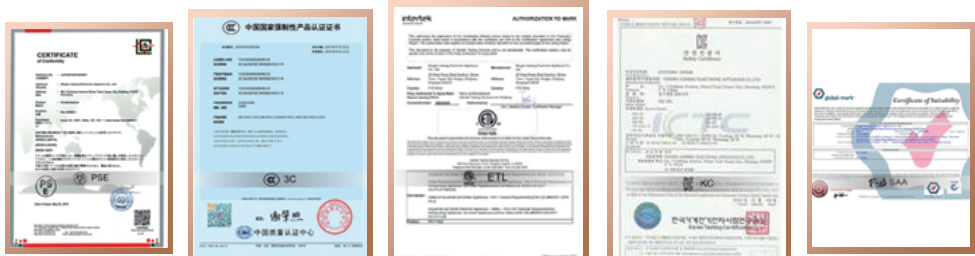

PSE CCC ETL KC SAA



FCC CE-LVD CE-EMC CB UKCA

PRODUCT SAFETY REGULATION CERTIFICATE



PATENT CERTIFICATE