

Tripcool®

Professional outdoor refrigerator brand

ICEBERG



泰国艾斯伯格电器有限公司

THAILAND ICEBERG ELECTRONIC APPLIANCE CO.,LTD.

Thailand Add:Thai-Chinese Rayong Industrial Zone
Tel:0086-0574-62357788 Fax:0086-574-62150900
Mob:0086-15968452888 E-mail:jack@minifridge.cn
Web:www.cniceberg.com Http://minifridge.en.alibaba.com



ICEBERG
艾斯伯格

ICEBERG



宁波艾斯伯格电器有限公司

NINGBO ICEBERG ELECTRONIC APPLIANCE CO., LTD.

China Add:No.25 Weisi Road(East Section),Simen Town,Yuyao City,Ningbo,Zhejiang Province,China 315470
Tel:0086-0574-62357788 Fax:0086-574-62150900
Mob:0086-15968452888 E-mail:jack@minifridge.cn
Web:www.cniceberg.com Http://minifridge.en.alibaba.com



NINGBO ICEBERG ELECTRONIC APPLIANCE CO.,LTD.

ABOUT US



NINGBO ICEBERG ELECTRONIC APPLIANCE CO.,LTD. is a company that integrates design, research and development, and production of mini refrigerators, beauty refrigerators, outdoor car refrigerators, cooler boxes, and ice makers.

The company was founded in 2015 and currently has over 500 employees, including 17 R&D engineers, 8 production management personnel, and 25 sales personnel.

The factory covers an area of 40,000 square meters and has 16 professional production lines, with an annual production output of 2,600,000 pieces and the annual output value exceeds 50 Million USD.

The company has always adhered to the concept of "innovation, quality and service". Our products have been widely recognized and trusted by customers from all over the world, especially in countries and regions such as the European Union, the United States, Japan, South Korea, Australia, etc. Our products occupy a high market share and high praise.

The company has been certificated by BSCI,IATF16949, ISO 9001 and ISO14001 and products have obtained certification for major markets such as CCC, CB, CE, GS, RoHS, ETL, SAA, LFGB, etc. We have more than 20 patents approved and used in our products.

We believe that you have a preliminary understanding of our company, and we firmly believe that you will have a strong interest in our products and services. Therefore, starting from this catalog, we will establish a strong partnership and achieve win-win results.

WORKSHOP




THAILAND ICEBERG ELECTRONIC APPLIANCE CO.,LTD

ABOUT US




THAILAND ICEBERG ELECTRONIC APPLIANCE CO.,LTD is a company of Thai origin established by NINGBO ICEBERG ELECTRONIC APPLIANCE CO.,LTD. which is a company integrating outdoor refrigerator design, research and development, and production. The company was established in 2025 and the factory covers an area of 5000 square meters. The company always adheres to the concept of “Innovation, Quality, Service”, and its products have been widely recognized and trusted by customers worldwide. The company has the certificate of origin of Thailand. We believe you have already had a preliminary understanding of our company, and we are confident that you will be interested in our products and services.




CATALOGUE


NINGBO ICEBERG ELECTRONIC APPLIANCE CO.,LTD.

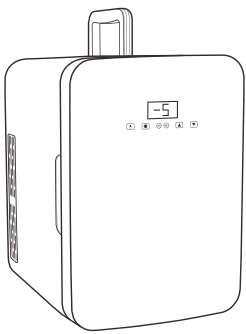


MINI FRIDGE

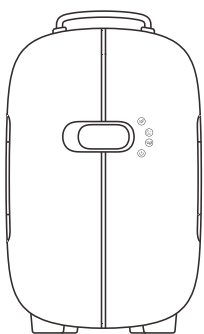


COSMETIC FRIDGE

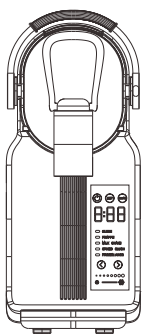


SLUSH MACHINE

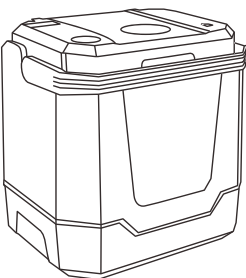

COOLER BOX

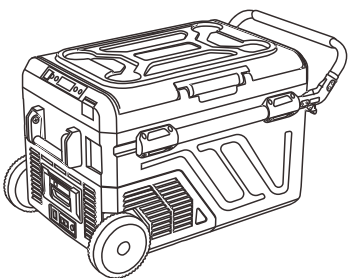

COMPRESSOR FRIDGE

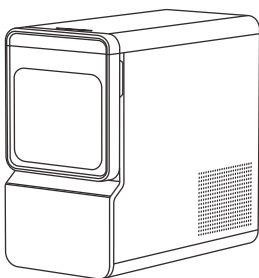

ICE MAKER

1 CATALOGUE ABOUT US P1-P6

2 ICE MAKER SLUSH MACHINE P7-P10

3 COSMETIC FRIDGE P11-P20

4 MINI FRIDGE P21-P43

5 COMPRESSOR FRIDGE P44-P71

6 CAMPING COOLER BOX P72-P94

7 CERTIFICATE P95-P96



ICE MAKER / SLUSH MACHINE
APPLY TO

DAILY LIFE, PARTIES, OUTDOOR CAMPING
BUSINESS SETTINGS



IBN15

NUGGET ICE MAKER

- 1.Ice Shape:Nugget
- 2.Ice Making Capacity:12kg/24H
- 3.Ice bin storage capacity:0.55 kg

Product Size:180x320x333(mm)
N.W.(KGS):10KG
6A Loading Qty (No Carton):954/1944/2268



IBB10

BULLET ICE MAKER

- 1.Ice Shape:Bullet
- 2.Ice Cubes Each Cycle:6 Pcs
- 3.Ice bin storage capacity:0.45 kg

Product Size:180x285x333(mm)
N.W.(KGS):6.5KG
6A Loading Qty (No Carton):1113/2268/2592



ICE MAKER / SLUSH MACHINE
APPLY TO

DAILY LIFE, PARTIES, OUTDOOR CAMPING
BUSINESS SETTINGS



IBB12

BULLET ICE MAKER

- 1.Ice Shape:Bullet
- 2.Ice Making Capacity:12kg/24H
- 3.Ice bin storage capacity:0.58 kg

Product Size:205x2269x282(mm)

N.W.(KGS):6.8KG

6A Loading Qty (No Carton):1128/2258/2700



IBS20

Single-Chamber Shaved Ice Machine

- 1.Ice Shape:Slushi
- 2.Ice Making Capacity:≤50min (620z)
- 3.Slushi storage capacity:>620z(Max) / >160z(Min)
- 4.Refrigeration system:Compressor air cooling

Product Size:165x398x443(mm)

N.W.(KGS):10.5KG

6A Loading Qty (No Carton):608/1288/1478



COSMETIC FRIDGE
APPLY TO

COSMETICS, BEAUTY / SKINCARE PRODUCTS




COOLING
10-18℃
TA: 25℃



MFA-12L-B
THERMOELECTRIC COOLER

1.Voltage:AC 100V-240V (with an adapter)
2.Volume:12 Litre
3.Power consumption:45W±10%

Inner Box Size:310*293*485(mm)	Carton Size:320*305*500(mm)
PACKING:1PC/Inner Box 1PC/CTN	
N.W./G.W(KGS):4.8/6.5KG	QTY/20*/40*/40*HC:570/1200/1350

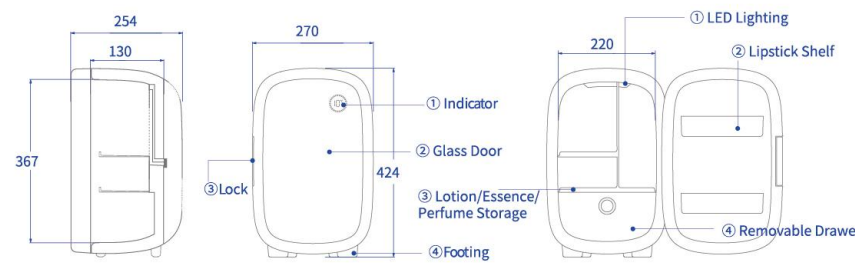


COOLING
10-18℃
TA: 25℃



MFA-12L-C
THERMOELECTRIC COOLER

1.Voltage:AC 100V-240V (with an adapter)
2.Volume:12 Litre
3.Power consumption:45W±10%

Inner Box Size:310*293*485(mm)	Carton Size:320*305*500(mm)
PACKING:1PC/Inner Box 1PC/CTN	
N.W./G.W(KGS):4.8/6.5KG	QTY/20*/40*/40*HC:570/1200/1350

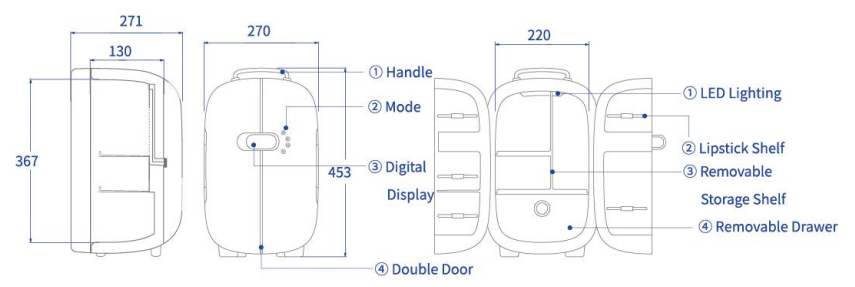


COSMETIC FRIDGE
APPLY TO

COSMETICS, BEAUTY / SKINCARE PRODUCTS



COOLING
10-18℃
TA: 25℃

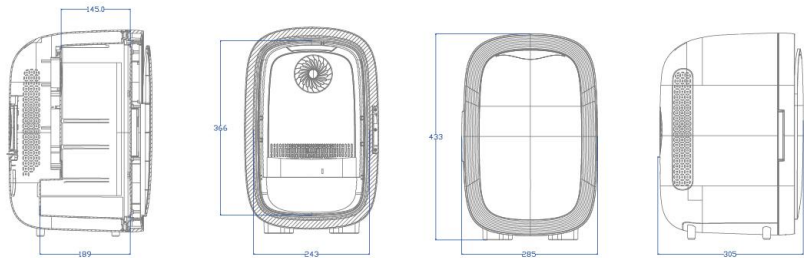

MFA-12L-M


THERMOELECTRIC COOLER

- 1.Voltage:AC 100-240V
- 2.Volume:12 Litre
- 3.Power consumption:50W±10%
- 4.Mask heating function on the door

Inner Box Size:335x315x482(mm)	Carton Size:345x325x500(mm)
PACKING:1PC/Inner Box 1PCS/CTN	
N.W/G.W(KGS):5.2/6.0	QTY/20"/40"/40"HC(PCS):500/1050/1240



COOLING
10-18℃
TA: 25℃

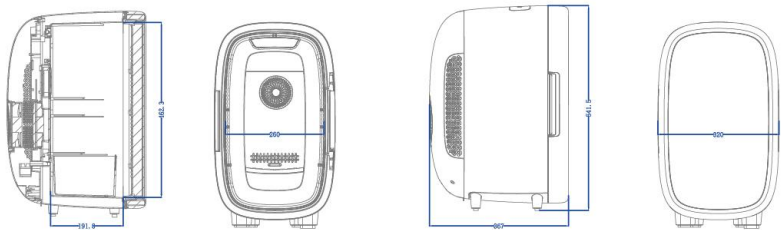

HZD-25L-A

THERMOELECTRIC COOLER

- 1.Voltage:AC 100-240V
- 2.Volume:25 Litre
- 3.Power consumption:50W±10%

Inner Box Size:413x363x610(mm)	Carton Size:425x380x620(mm)
PACKING:1PC/Inner Box 1PCS/CTN	
N.W/G.W(KGS):7.5/9.5	QTY/20"/40"/40"HC(PCS):300/600/700



COOLING

10-18℃

TA: 25℃




MFA-5L-F

THERMOELECTRIC COOLER

- 1.Voltage:AC 100V-240V
- 2.Volume:5 Litre
- 3.Power consumption:38W±10%

Inner Box Size:368*255*353(mm)	Carton Size:380*270*370(mm)
PACKING:1PC/Inner Box 1PC/CTN	
N.W./G.W.(KGS):4.0/5.4KG	QTY/20*/40*/40*HC:700/1480/1760

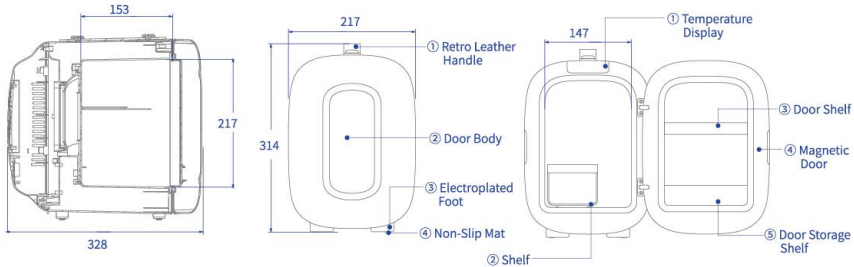

COOLING

10-14℃

TA: 25℃




CBA-9L

THERMOELECTRIC COOLER

- 1.Voltage:AC 100V-240V
- 2.Volume:9 Litre
- 3.Power consumption:20W±10%

Inner Box Size:433*340*260(mm)	Carton Size:455*355*275(mm)
PACKING:1PC/Inner Box 1PC/CTN	
N.W./G.W.(KGS):4.7/5.5KG	QTY/20*/40*/40*HC:650/1300/1490

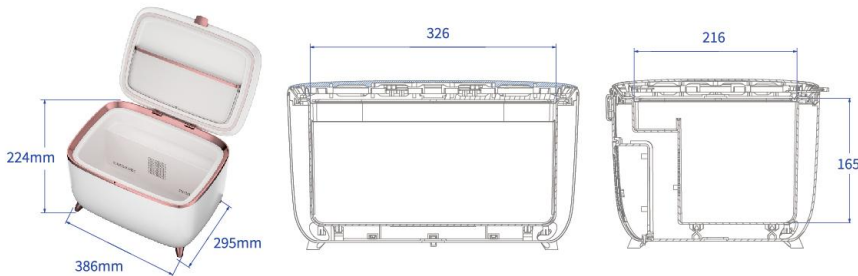

HEATING

45-65℃

COOLING

3-5℃

TA: 25℃




MFA-5L-N

THERMOELECTRIC COOLER AND WARMER

- 1.Voltage:DC 12V and AC 220V-240V or AC100-120V
- 2.Volume:4 Litre
- 3.Power consumption:35W±10%

Inner Box Size:273*195*290(mm)	Carton Size:405*290*595(mm)
PACKING:1PC/Inner Box 4PCS/CTN	
N.W./G.W.(KGS):8.0/10.0	QTY/20*/40*/40*HC:1600/3200/3900

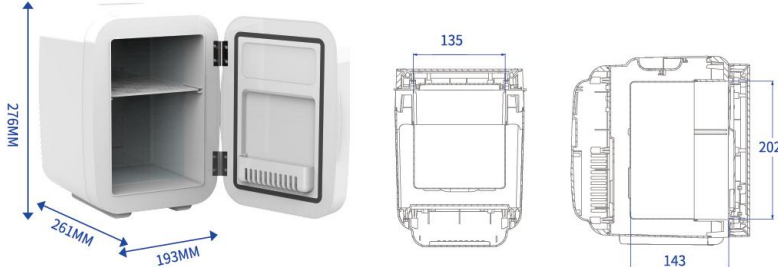

HEATING

45-65℃

COOLING

3-5℃

TA: 25℃




MFA-5L-P

THERMOELECTRIC COOLER AND WARMER

- 1.Voltage:DC 12V and AC 220V-240V or AC100-120V
- 2.Volume:4 Litre
- 3.Power consumption:35W±10%

Inner Box Size:273*195*290 (mm)	Carton Size:405*290*595(mm)
PACKING:1PC/Inner Box 4PCS/CTN	
N.W./G.W.(KGS):8.0/10.0	QTY/20*/40*/40*HC:1600/3200/3900

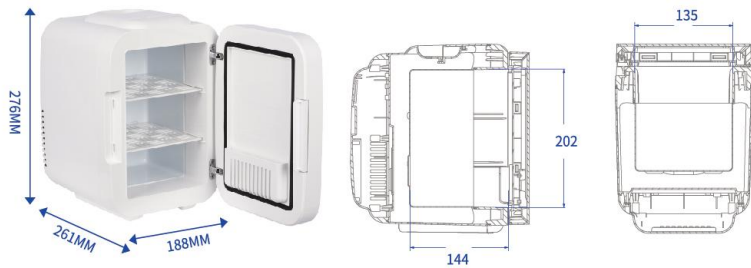


HEATING 45-65℃
COOLING 3-5℃
TA: 25℃



MFA-5L-S
THERMOELECTRIC COOLER AND WARMER

- 1.Voltage:DC 12V and AC 220V-240V or AC100-120V
- 2.Volume:4 Litre
- 3.Power consumption:35W±10%

Inner Box Size:300*198*285(mm)	Carton Size:585*420*320(mm)
PACKING:1PC/Inner Box 4PCS/CTN	
N.W/G.W.(KGS):8.0/10.0	QTY/20"/40"/40*HC(PCS):1400/2950/3450

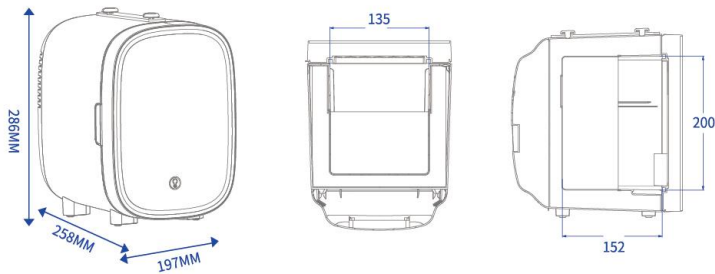

HEATING 50-65℃
COOLING 3-5℃
TA: 25℃



MFA-6L-G
THERMOELECTRIC COOLER AND WARMER

- 1.Voltage:DC 12V and AC 220V-240V or AC100-120V
- 2.Volume:6 Litre
- 3.Power consumption:48W±10%

Inner Box Size:341*243*349(mm)	Carton Size:350*490*700(mm)
PACKING:1PC/Inner Box 4PCS/CTN	
N.W/G.W.(KGS):11/15	QTY/20"/40"/40*HC(PCS):850/1750/2050




COOLING 6-8℃
TA: 25℃



CBA-6L-I
THERMOELECTRIC COOLER

- 1.Voltage:AC 100-240V(with an adapter)
- 2.Volume:6 Litre
- 3.Power consumption:20W±10%

Inner Box Size:374*252*218(mm)	Carton Size:525*390*460(mm)
PACKING:1PC/Inner Box 4PCS/CTN	
N.W/G.W.(KGS):9/11.5	QTY/20"/40"/40*HC(PCS):1100/2400/2700

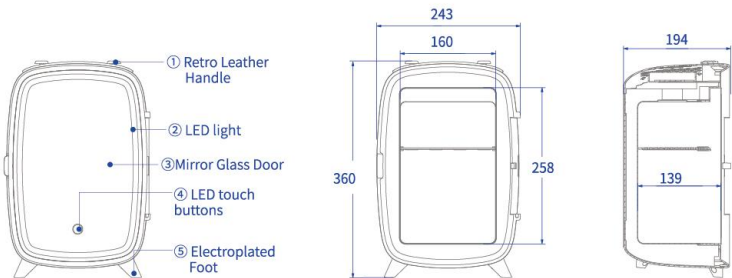


HEATING 40-50℃
COOLING 5-8℃
TA: 25℃



MFA-10L-I
THERMOELECTRIC COOLER AND WARMER

- 1.Voltage:DC 12V and AC 220-240V or AC 100-120V
- 2.Volume:10 Litre
- 3.Power consumption:48W±10%

Inner Box Size:326*280*379(mm)	Carton Size:575*340*395(mm)
PACKING:1PC/Inner Box 2PCS/CTN	
N.W/G.W.(KGS):7.1/9.8	QTY/20"/40"/40*HC(PCS):760/1500/1800

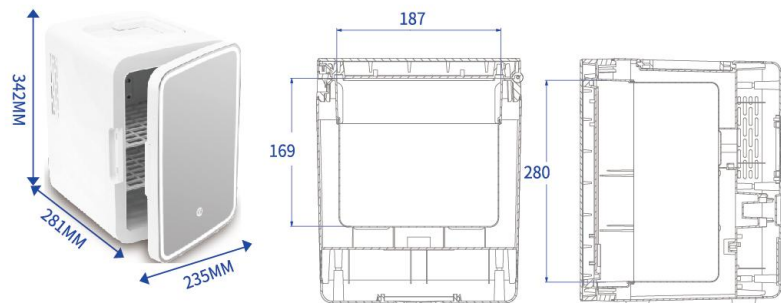

HEATING
45-65℃

COOLING
3-5℃

TA: 25℃

NEW



MFA-6L-F

THERMOELECTRIC COOLER AND WARMER

1.Voltage:DC 12V and AC 220V-240V or AC100-120V

2.Volume:6 Litre



3.Power consumption:35W±10%

4.With Glass surface

Inner Box Size: 315*196*355(mm)	Carton Size:365*325*412(mm)
Inner Size: 162*137*266(mm)	PACKING:1PC/Inner Box 2PCS/CTN
N.W./G.W(KGS):7.0/9.0KG	QTY/20*/40*/40*HC:1200/2600/2900









324MM

274MM

190MM



324MM

274MM

190MM



HEATING
45-65℃

COOLING
3-5℃

TA: 25℃

NEW



MFA-6L-H(US/EU/UK exclusive)

THERMOELECTRIC COOLER AND WARMER

1.Voltage:DC 12V and AC 220V-240V or AC100-120V



2.Volume:6 Litre

3.Power consumption:35W±10%

Inner Box Size: 315*196*355(mm)	Carton Size:365*325*412(mm)
Inner Size: 162*137*266(mm)	PACKING:1PC/Inner Box 2PCS/CTN
N.W./G.W(KGS):6.0/8.0KG	QTY/20*/40*/40*HC:1200/2600/2900







324MM

274MM

190MM



COOLING
9-11℃

TA: 25℃

NEW



CBA-5L(AU/NZ exclusive)

THERMOELECTRIC COOLER

1.Voltage: AC 220V-240V or AC100-120V



2.Volume:5 Litre

3.Power consumption:38W±10%

Carton Size: 378*248*295(mm)	
PACKING:1PC/CTN	
N.W./G.W(KGS):2.3/3KG	QTY/20*/40*/40*HC:1149/2263/2608









243MM

215MM

341MM



324MM

274MM

190MM



HEATING
45-65℃

COOLING
3-5℃

TA: 25℃

NEW



MFA-6L-I

THERMOELECTRIC COOLER AND WARMER

1.Voltage:DC 12V and AC 220V-240V or AC100-120V



2.Volume:6 Litre

3.Power consumption:35W±10%

Inner Box Size: 315*196*355(mm)	Carton Size: 365*325*412(mm)
Inner Size: 162*137*266(mm)	PACKING:1PC/Inner Box 2PCS/CTN
N.W./G.W(KGS): 7.0/9.0KG	QTY/20*/40*/40*HC:1200/2600/2900







324MM

274MM

190MM



ISO BSCI ROHS CCC CE ETL PS UK FDA

ISO BSCI ROHS CCC CE ETL PS UK FDA

19

20

MINI FRIDGE APPLY TO

CAR, HOME, HOTEL, BAR, OFFICE, COSMETIC





COOLING
2-28°C
TA: 32°C




ICE M100


Intelligent lock temperature box (Insulin portable box)

- 1.Capacity: Insulin injection pen + 3 needles
- 2.Built-in lithium battery: 3.7V 200mAh
- 3.Battery life: ≈30 days
- 4.Rated input: 5V 1A
- 5.Temperature range: 2-28°C
- 6.Temperature alarm: Sound and light alarm
- 7.Housing material: PU+ABS
- 8.Spare parts: PU leather flip cover, USB cable

Item size: 190x38.7x70(mm)	Carton Size:540x465x380(mm)
Inner box: 226x131x72(mm)	PACKING:1PC/Box 40 Boxes/CTN
N.W(KGS):200g±10%	QTY/20"/40"/40"H(C/PCS):10800/24400/28400




1 Injection pen*



3 Needles*



COOLING
2-8°C
TA: 32°C

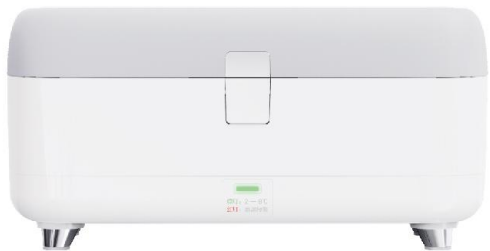

ICE S100


Intelligent cooler box (Insulin cooler box)

- 1.Capacity: 8 drugs
- 2.Max cooling temperature range: 28°C±2°C
- 3.Rated voltage power: 26W
- 4.Power supply: 9V 3A adapter
- 5.Lowest temperature inside the box: 2 °C ± 1 °C
- 6.Alarm mode: Sound and light alarm
- 7.Housing material: Aluminium + ABS
- 8.Spare parts: Adapter, travelling bag

Item size: 216x114x107(mm)	Carton Size:610x545x570(mm)
Inner box: 264x196x184(mm)	PACKING:1PC/Box 18 Boxes/CTN
N.W(KGS):900g±10%	QTY/20"/40"/40"H(C/PCS):2520/5580/6480



TRAVELLING BAG



8 Drugs*

COOLING
5-8℃

TA: 25℃



MINI FRIDGE MFA-0.5L

PRODUCT NAME AND TECHNICAL FEATURES

- 1.Voltage:DC 5V with USB cord AC 100V-240V with an adapter
- 2.Volume:0.5 Litre
- 3.Power consumption:48W±10%

Inner Box Size:140*140*215(mm)	Carton Size:730*300*450(mm)
PACKING:1PC/Inner Box 20PCS/CTN	
N.W/G.W.(KGS):8/10	QTY/20*/40*/40*HC(PCS)5800/12000/14000

 **1 CANS***
330ml Cola

COOLING
2-18℃

TA: 25℃



MFA-I-01 THERMOELECTRIC INSULIN CASE

- 1.Voltage:DC 5V,USB Cord AC 100-240V with AC Plug
- 2.Volume:6 insulin
- 3.2-18℃ set temperature

Inner Box Size:330*130*155(mm)	Carton Size:350*290*660(mm)
PACKING:1PC/Inner Box 9PCS/CTN	
N.W/G.W.(KGS):10.4/14.4	QTY/20*/40*/40*HC(PCS)3700/7700/9000

 **6 INSULIN***



COOLING
5-8℃


TA: 25℃



MFA-2.5L THERMOELECTRIC COOLER

- 1.Voltage:AC 100-240V
- 2.Volume:2.5 Litre
- 3.Power consumption:48W±10%

Inner Box Size:263*256*172(mm)	Carton Size:511*359*241(mm)
PACKING:1PC/Inner Box 4PCS/CTN	
N.W/G.W.(KGS):10/12	QTY/20*/40*/40*HC(PCS)2100/4300/5000

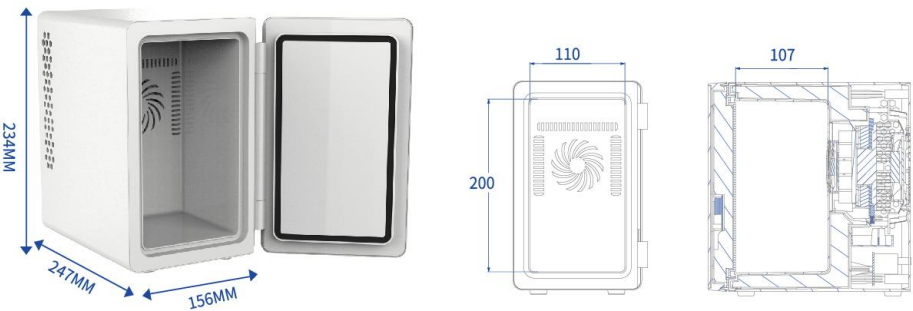

COOLING
3℃

TA: 20℃




MFA-3.5L-GA KITCHEN GARBAGE COOLER

- 1.Voltage:AC 100-240V(with an adapter)
- 2.Volume:3.5 Litre
- 3.Power consumption:20W±10%

Inner Box Size:238*238*303(mm)	Carton Size:250*250*320(mm)
PACKING:1PC/Inner Box 1PCS/CTN	
N.W/G.W.(KGS):1.9/2.3	QTY/20*/40*/40*HC(PCS)1300/2850/3200

 **4 BOTTLES***
380ml Water

 **4 CANS***
330ml Cola

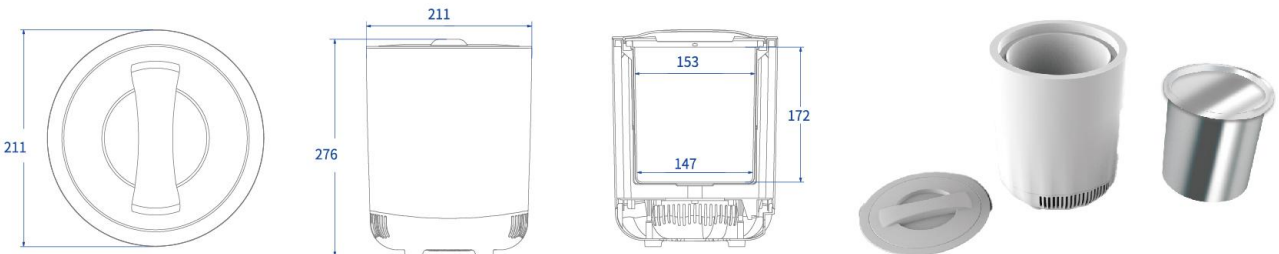

HEATING
45-65℃
COOLING
5-8℃
TA: 25℃



MFA-5L

THERMOELECTRIC COOLER AND WARMER

- 1.Voltage:AC 220-240V or AC 100-120V and USB
- 2.Volume:4 Litre
- 3.Power consumption:24W±10%


Inner Box Size:273*194*290(mm)	Carton Size:405*290*595(mm)
PACKING:1PC/Inner Box 4PCS/CTN	
N.W/G.W.(KGS):7.5/9.2	QTY/20*/40*/40*HC(PCS):1500/3200/3900



4 BOTTLES*
380ml Water



6 CANS*
330ml Cola

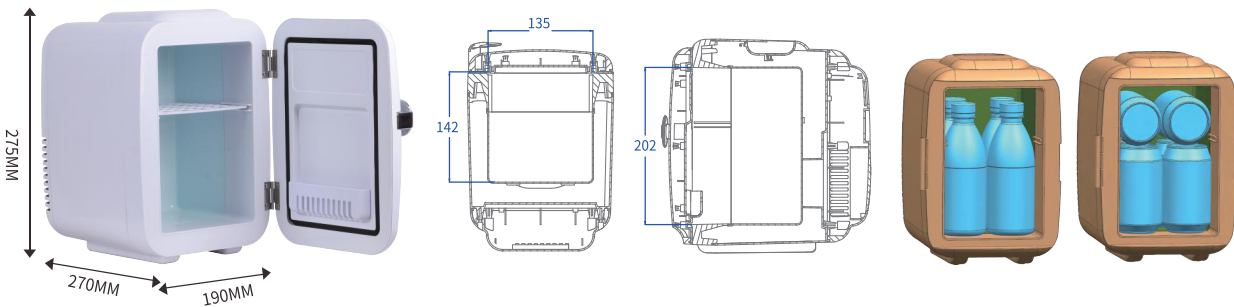

HEATING
45-65℃
COOLING
5-8℃
TA: 25℃



MFP-5L-I

THERMOELECTRIC COOLER

- 1.Voltage:AC 220-240V or AC 100-120V and DC
- 2.Volume:4 Litre
- 3.Power consumption:24W±10%


Inner Box Size:274*196*277(mm)	Carton Size:405*290*575(mm)
PACKING:1PC/Inner Box 4PCS/CTN	
N.W/G.W.(KGS):7/10	QTY/20*/40*/40*HC(PCS):1500/3200/3900



4 BOTTLES*
380ml Water



6 CANS*
330ml Cola

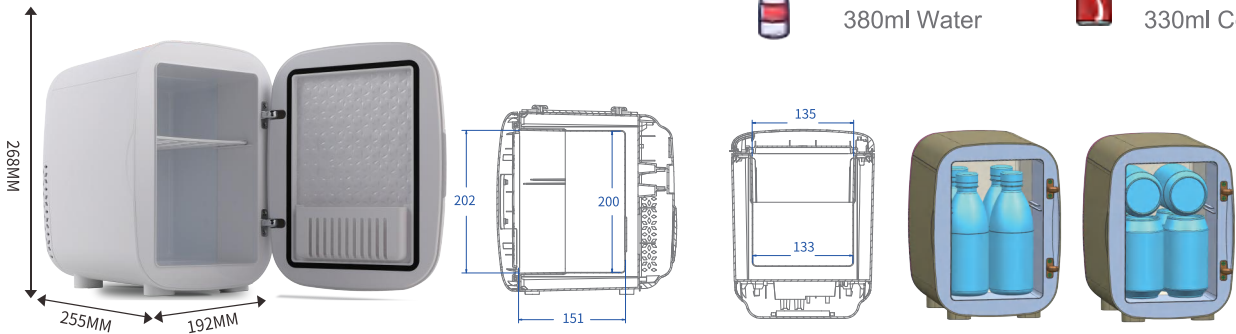

COOLING
8-10℃
TA: 25℃(no load)



MFP-5LL-A1

THERMOELECTRIC COOLER

- 1.Voltage:AC 220-240V or AC 100-120V and USB
- 2.Volume:4 Litre
- 3.Power consumption:24W±10%


Inner Box Size:274*196*277(mm)	Carton Size:405*290*575(mm)
PACKING:1PC/Inner Box 4PCS/CTN	
N.W/G.W.(KGS):7/10	QTY/20*/40*/40*HC(PCS):1500/3200/3900



4 BOTTLES*
380ml Water



6 CANS*
330ml Cola

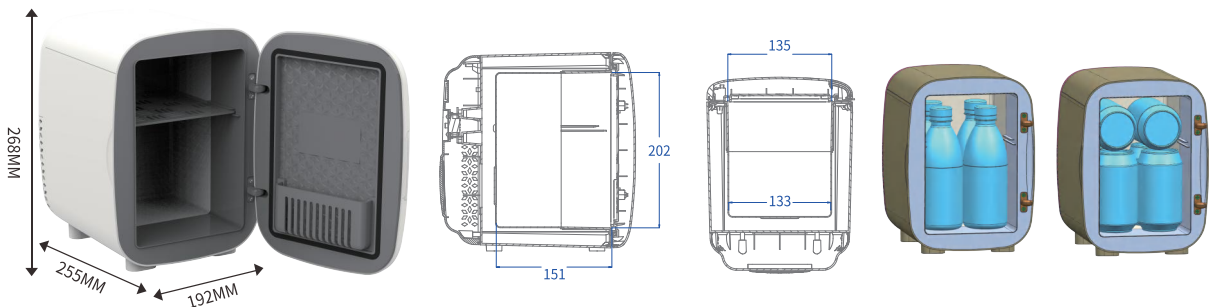

HEATING
45-55℃
COOLING
5-8℃
TA: 25℃



MFA-5L-I (US/UK/EU exclusive)

THERMOELECTRIC COOLER AND WARMER

- 1.Voltage:AC 220-240V or AC 100-120V and USB
- 2.Volume:4 Litre
- 3.Power consumption:24W±10%


Inner Box Size:273*194*290(mm)	Carton Size:405*290*595(mm)
PACKING:1PC/Inner Box 4PCS/CTN	
N.W/G.W.(KGS):7.5/9.2	QTY/20*/40*/40*HC(PCS):1500/3200/3900




4 BOTTLES*
380ml Water



6 CANS*
330ml Cola

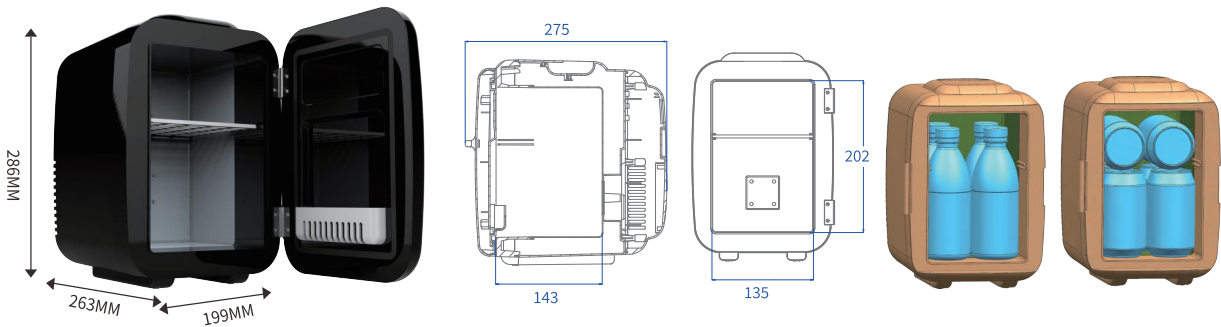



MFA-5L-A

THERMOELECTRIC COOLER AND WARMER

- 1.Voltage:DC 12V and AC 220-240V or AC 100-120V
- 2.Volume:4 Litre
- 3.Power consumption:35W±10%


Inner Box Size:273*194*290(mm)	Carton Size:405*290*595(mm)
PACKING:1PC/Inner Box 4PCS/CTN	
N.W/G.W.(KGS):8.0/10.0	QTY/20"/40"/40*HC(PCS):1500/3200/3900



4 BOTTLES*
380ml Water



6 CANS*
330ml Cola

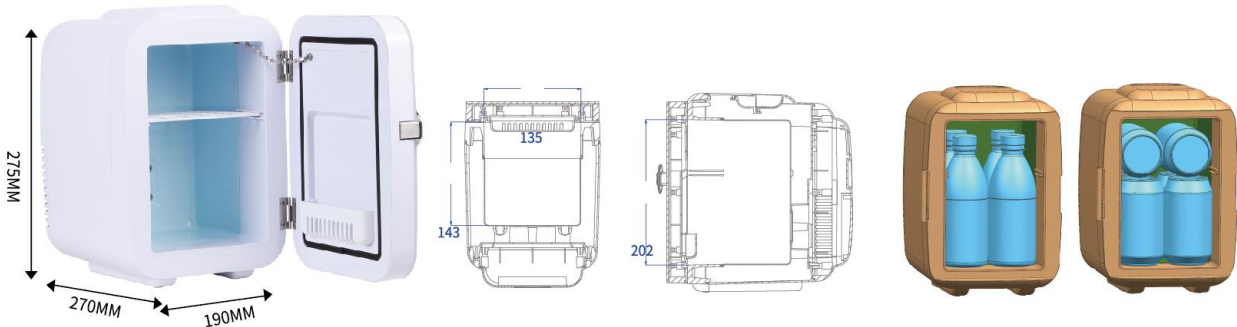

MFA-5L-B

THERMOELECTRIC COOLER AND WARMER

- 1.Voltage:DC 12V and AC 220-240V or AC 100-120V
- 2.Volume:4 Litre
- 3.Power consumption:35W±10%



Inner Box Size:273*194*290(mm)	Carton Size:405*290*595(mm)
PACKING:1PC/Inner Box 4PCS/CTN	
N.W/G.W.(KGS):7.5/9.2	QTY/20"/40"/40*HC(PCS):1500/3200/3900



4 BOTTLES*
380ml Water



6 CANS*
330ml Cola

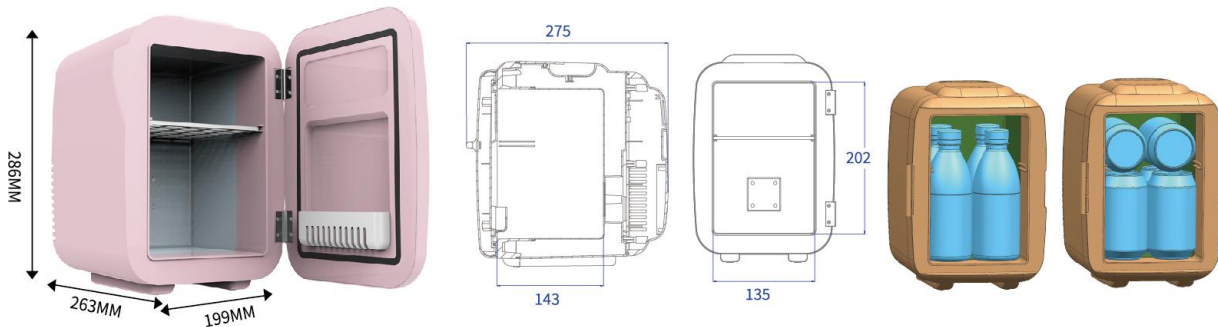

MFA-5L-GA

THERMOELECTRIC COOLER AND WARMER

- 1.Voltage:AC 100-240V (with an adapter)
- 2.Volume:4 Litre
- 3.Power consumption:20W±10%



Inner Box Size:300*198*285(mm)	Carton Size:585*420*320(mm)
PACKING:1PC/Inner Box 4PCS/CTN	
N.W/G.W.(KGS):6.5/9	QTY/20"/40"/40*HC(PCS):1300/2850/3200



4 BOTTLES*
380ml Water



6 CANS*
330ml Cola

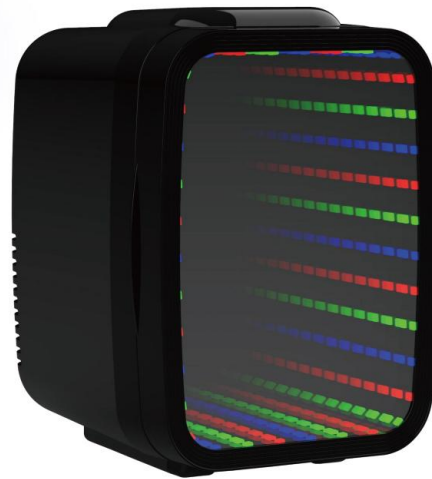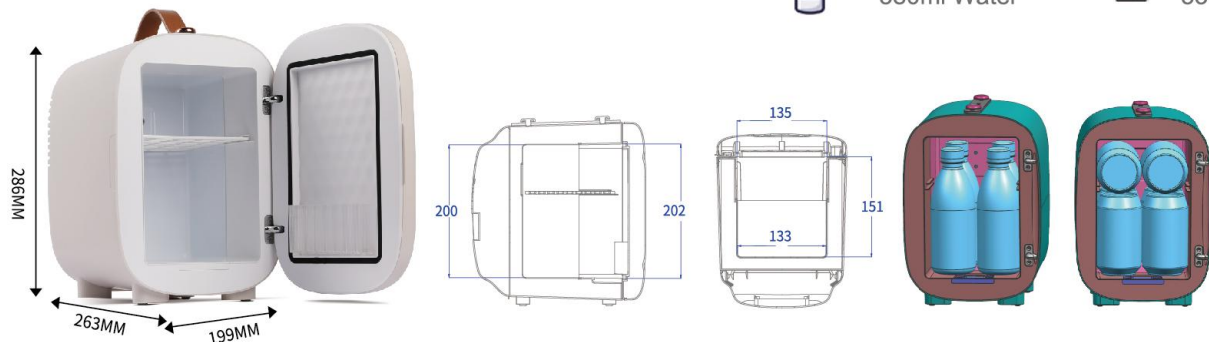

MFA-5L-O

THERMOELECTRIC COOLER AND WARMER

- 1.Voltage:DC 12V and AC 220-240V or AC 100-120V
- 2.Volume:4 Litre
- 3.Power consumption:35W±10%


Inner Box Size:285*200*295(mm)	Carton Size:420*300*615(mm)
PACKING:1PC/Inner Box 4PCS/CTN	
N.W/G.W.(KGS):8.0/10.0	QTY/20"/40"/40*HC(PCS):1500/3200/3900



4 BOTTLES*
380ml Water



6 CANS*
330ml Cola

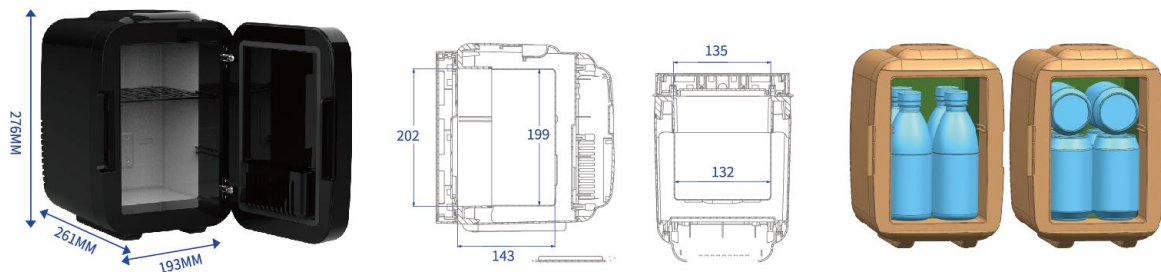

HEATING
45-55℃
COOLING
5-8℃
TA: 25℃




MFP-5L(US exclusive)
THERMOELECTRIC COOLER AND WARMER

- 1.Voltage:DC 12V and AC 220-240V or AC 100-120V
- 2.Volume:4 Litre
- 3.Power consumption:35W±10%

Inner Box Size:273*194*290(mm)	Carton Size:405*290*595(mm)
PACKING:1PC/Inner Box 4PCS/CTN	
N.W/G.W.(KGS):7.2/9.0	QTY/20"/40"/40*HC(PCS):1500/3200/3900

4 BOTTLES*
380ml Water
6 CANS*
330ml Cola

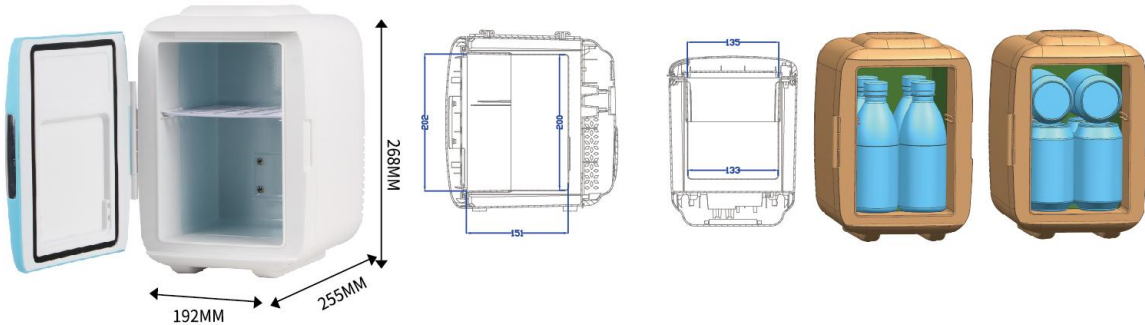

COOLING
8-10℃
TA: 25℃(no load)




MFA-6LL-B (US/EU exclusive)
THERMOELECTRIC COOLER

- 1.Voltage:AC 100-240V(with an adapter)
- 2.Volume:6 Litre
- 3.Power consumption:27W±10%

Inner Box Size:276*219*337(mm)	Carton Size:455*290*350(mm)
PACKING:1PC/Inner Box 2PCS/CTN	
N.W/G.W.(KGS):4.6/6.6	QTY/20"/40"/40*HC(PCS):1200/2400/2850

4 BOTTLES*
380ml Water
8 CANS*
330ml Cola

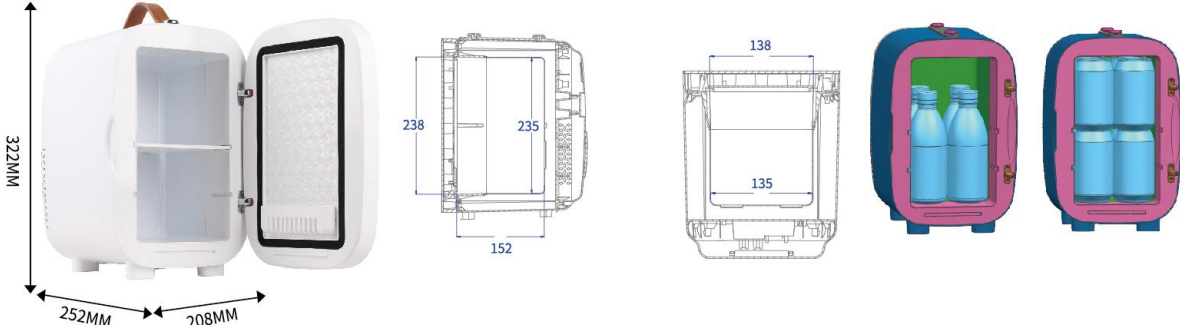

COOLING
8-10℃
TA: 25℃(no load)




MFP-5LL-A (US/EU exclusive)
THERMOELECTRIC COOLER

- 1.Voltage:AC 100-240V(with an adapter)
- 2.Volume:4 Litre
- 3.Power consumption:27W±10%

Inner Box Size:274*196*277(mm)	Carton Size:405*290*575(mm)
PACKING:1PC/Inner Box 4PCS/CTN	
N.W/G.W.(KGS):7/10	QTY/20"/40"/40*HC(PCS):1500/3200/3900

4 BOTTLES*
380ml Water
6 CANS*
330ml Cola

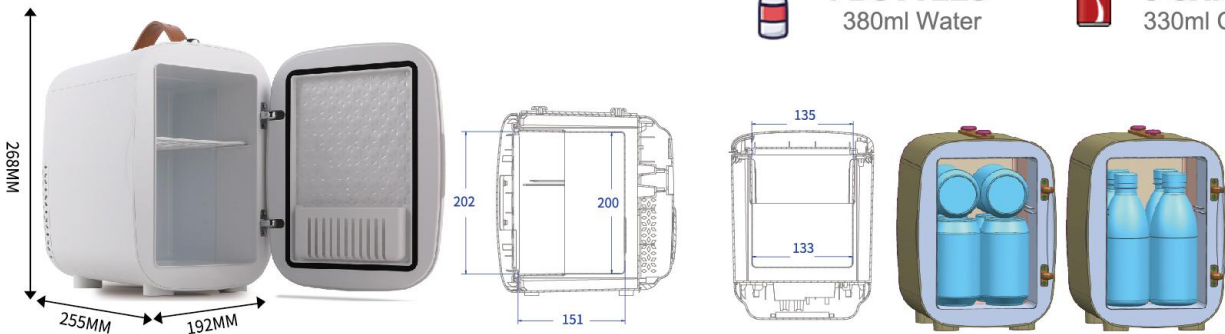

COOLING
8-10℃
TA: 25℃(no load)




MFA-6LL-A (US/EU exclusive)
THERMOELECTRIC COOLER

- 1.Voltage:AC 100-240V(with an adapter)
- 2.Volume:6 Litre
- 3.Power consumption:27W±10%

Inner Box Size:276*219*337(mm)	Carton Size:455*290*350(mm)
PACKING:1PC/Inner Box 2PCS/CTN	
N.W/G.W.(KGS):3.8/5.8	QTY/20"/40"/40*HC(PCS):1200/2400/2850

4 BOTTLES*
380ml Water
6 CANS*
330ml Cola

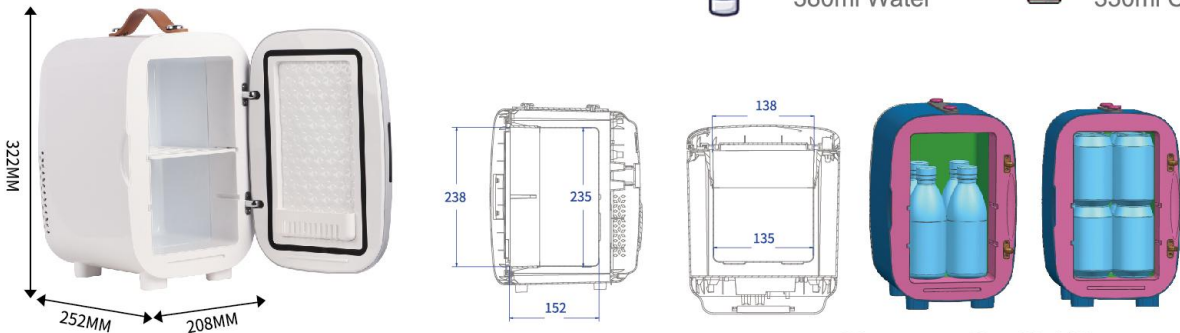

HEATING
50-65℃
COOLING
5-8℃
TA: 25℃




MFA-6L
THERMOELECTRIC COOLER AND WARMER

- 1.Voltage:DC 12V and AC 220-240V or AC 100-120V
- 2.Volume:6 Litre
- 3.Power consumption:48W±10%

Inner Box Size:315*260*350(mm)	Carton Size:540*330*720(mm)
PACKING:1PC/Inner Box 4PCS/CTN	
N.W/G.W.(KGS):11/15	QTY/20*/40*/40*HC(PCS):850/1750/2050

4 BOTTLES*
380ml Water
8 CANS*
330ml Cola

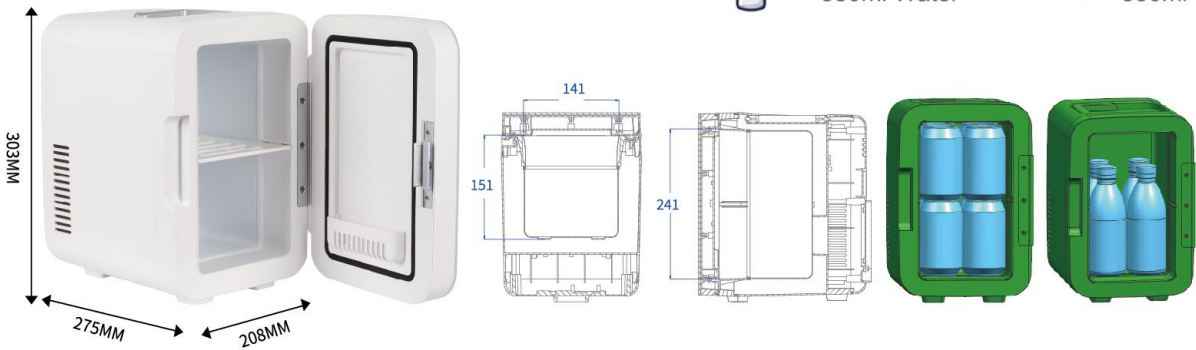

COOLING
8-10℃
TA: 25℃



CBA-6L-F
THERMOELECTRIC COOLER

- 1.Voltage:AC 100-240V(with an adapter)
- 2.Volume:6 Litre
- 3.Power consumption:27W±10%

Inner Box Size:374*252*218(mm)	Carton Size:525*390*460(mm)
PACKING:1PC/Inner Box 4PCS/CTN	
N.W/G.W.(KGS):9/11.5	QTY/20*/40*/40*HC(PCS):1100/2400/2700

4 BOTTLES*
380ml Water
8 CANS*
330ml Cola



COOLING
8-10℃
TA: 25℃



CBA-6L-G
THERMOELECTRIC COOLER

- 1.Voltage:AC 100-240V(with an adapter)
- 2.Volume:6 Litre
- 3.Power consumption:27W±10%

Inner Box Size:374*252*218(mm)	Carton Size:525*390*460(mm)
PACKING:1PC/Inner Box 4PCS/CTN	
N.W/G.W.(KGS):7/9.45	QTY/20*/40*/40*HC(PCS):1100/2400/2700

4 BOTTLES*
380ml Water
8 CANS*
330ml Cola



COOLING
8-10℃
TA: 25℃



CBA-6L-H
THERMOELECTRIC COOLER

- 1.Voltage:AC 100-240V(with an adapter)
- 2.Volume:6 Litre
- 3.Power consumption:27W±10%

Inner Box Size:374*252*218(mm)	Carton Size:525*390*460(mm)
PACKING:1PC/Inner Box 4PCS/CTN	
N.W/G.W.(KGS):7/9.45	QTY/20*/40*/40*HC(PCS):1100/2400/2700

4 BOTTLES*
380ml Water
8 CANS*
330ml Cola



COOLING
8-10℃
TA: 25℃



CBA-6L
THERMOELECTRIC COOLER

- 1.Voltage:AC 100-240V(with an adapter)
- 2.Volume:6 Litre
- 3.Power consumption:27W±10%


Inner Box Size:369*325*222(mm)	Carton Size:520*380*465(mm)
PACKING:1PC/Inner Box 4PCS/CTN	
N.W/G.W.(KGS):7/9.45	QTY/20*/40*/40*HC(PCS):1100/2400/2700



4 BOTTLES*
380ml Water



8 CANS*
330ml Cola

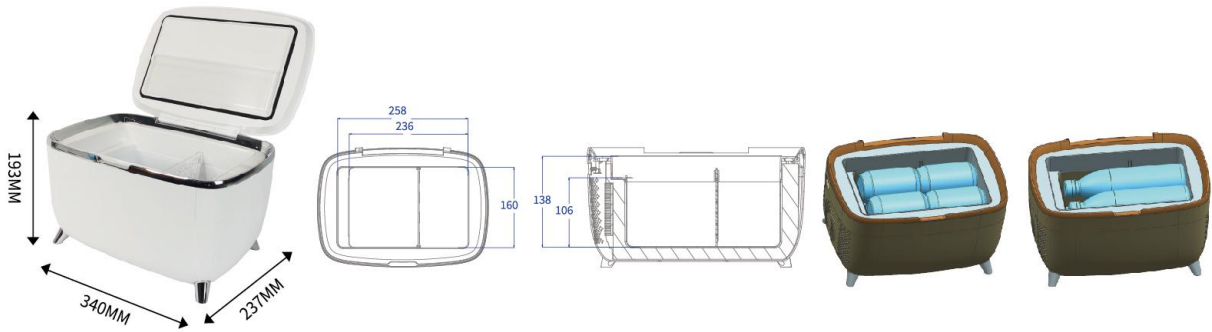

COOLING
8-10℃
TA: 25℃



CBA-6L-A
THERMOELECTRIC COOLER

- 1.Voltage:AC 100-240V(with an adapter)
- 2.Volume:6 Litre
- 3.Power consumption:27W±10%


Inner Box Size:369*325*222(mm)	Carton Size:520*380*465(mm)
PACKING:1PC/Inner Box 4PCS/CTN	
N.W/G.W.(KGS):7/9.45	QTY/20*/40*/40*HC(PCS):1100/2400/2700



4 BOTTLES*
380ml Water



8 CANS*
330ml Cola

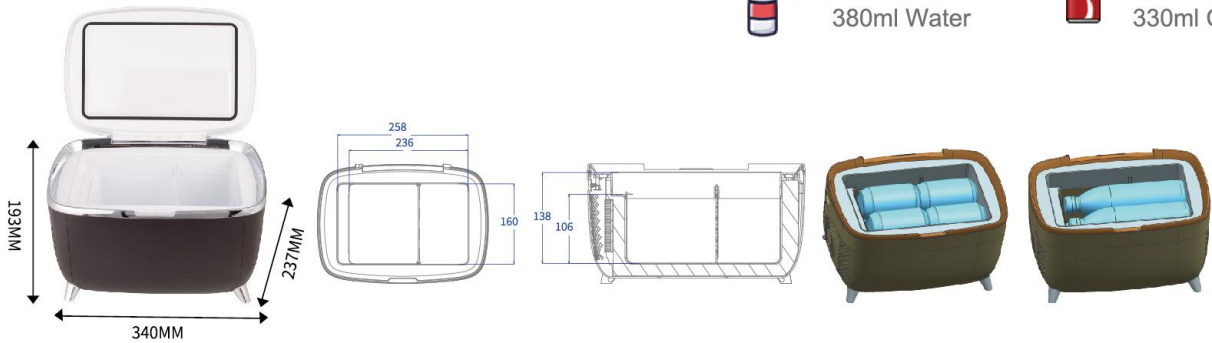

HEATING
50-65℃
TA: 25℃

COOLING
5-8℃



MFA-10L-C
THERMOELECTRIC COOLER AND WARMER

- 1.Voltage:DC 12V and AC 220-240V or AC 100-120V
- 2.Volume:10 Litre
- 3.Power consumption:50W±10%


Inner Box Size:326*280*379(mm)	Carton Size:575*340*395(mm)
PACKING:1PC/Inner Box 2PCS/CTN	
N.W/G.W.(KGS):7.5/9.5	QTY/20*/40*/40*HC(PCS):760/1500/1720



5 BOTTLES*
380ml Water



11 CANS*
330ml Cola

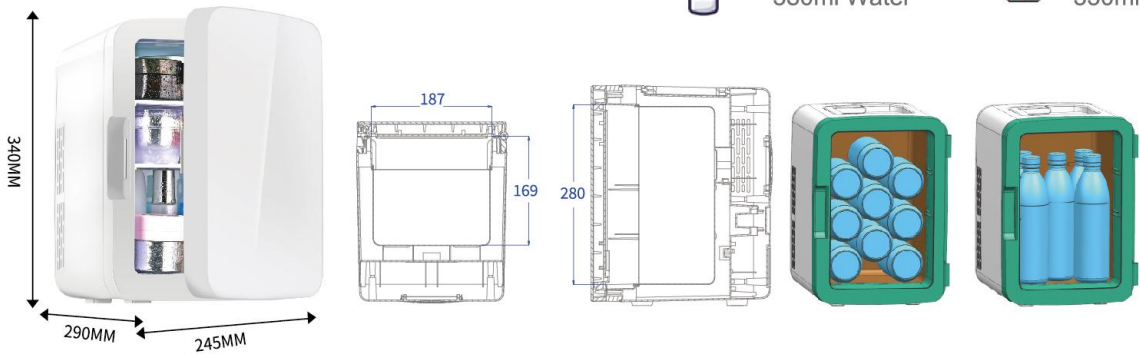

HEATING
50-65℃
TA: 25℃

COOLING
5-8℃



MFA-10L
THERMOELECTRIC COOLER AND WARMER

- 1.Voltage:DC 12V and AC 220-240V or AC 100-120V
- 2.Volume:10 Litre
- 3.Power consumption:50W±10%


Inner Box Size:326*280*379(mm)	Carton Size:575*340*395(mm)
PACKING:1PC/Inner Box 2PCS/CTN	
N.W/G.W.(KGS):7.0/9.0	QTY/20*/40*/40*HC(PCS):760/1500/1720



5 BOTTLES*
380ml Water



11 CANS*
330ml Cola

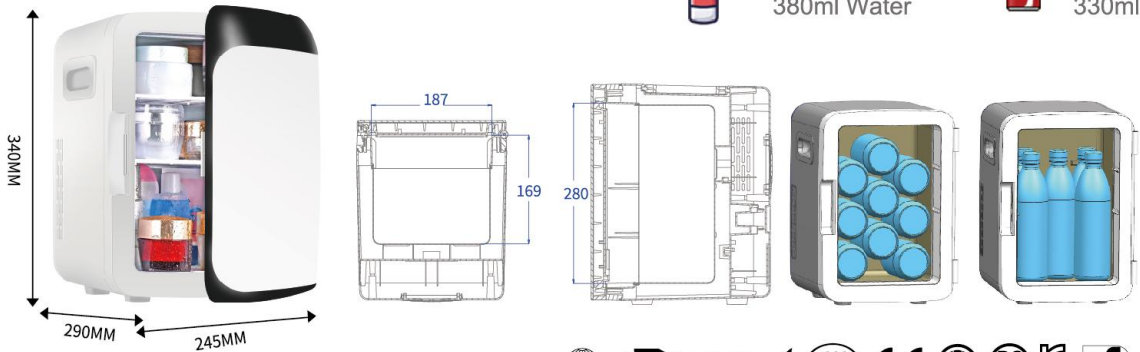




MFA-10L-JA4

THERMOELECTRIC COOLER AND WARMER

- 1.Voltage:AC 100-240V or DC 12V
- 2.Volume:10 Litre
- 3.Power consumption:50W±10%

Inner Box Size:355*283*398(mm)	Carton Size:590*370*415(mm)
PACKING:1PC/Inner Box 2PCS/CTN	
N.W/G.W.(KGS):3.7/4.8	QTY/20"/40"/40*HC(PCS):615/1270/1490

5 BOTTLES* 380ml Water 11 CANS* 330ml Cola

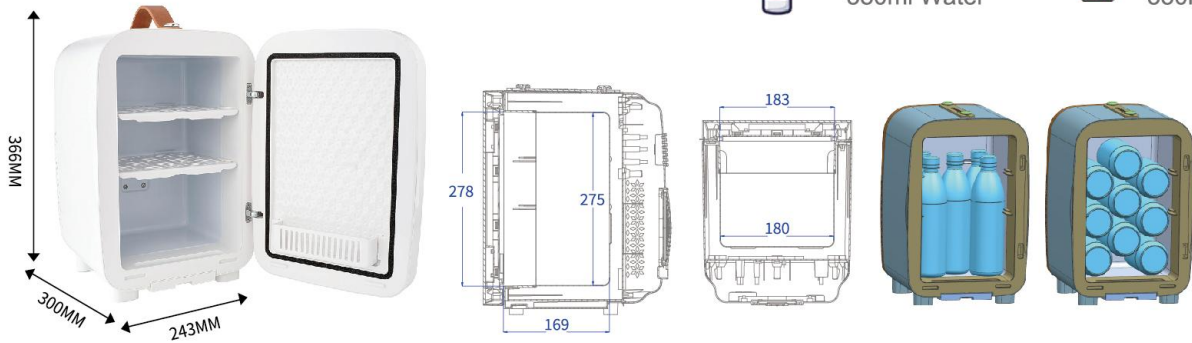


MFA-10L-JA2

THERMOELECTRIC COOLER AND WARMER(single cooling)

- 1.Voltage:AC 100-240V or DC 12V
- 2.Volume:10 Litre
- 3.Power consumption:50W±10%

Inner Box Size:355*283*398(mm)	Carton Size:590*370*415(mm)
PACKING:1PC/Inner Box 2PCS/CTN	
N.W/G.W.(KGS):3.7/4.8	QTY/20"/40"/40*HC(PCS):615/1270/1490

5 BOTTLES* 380ml Water 11 CANS* 330ml Cola

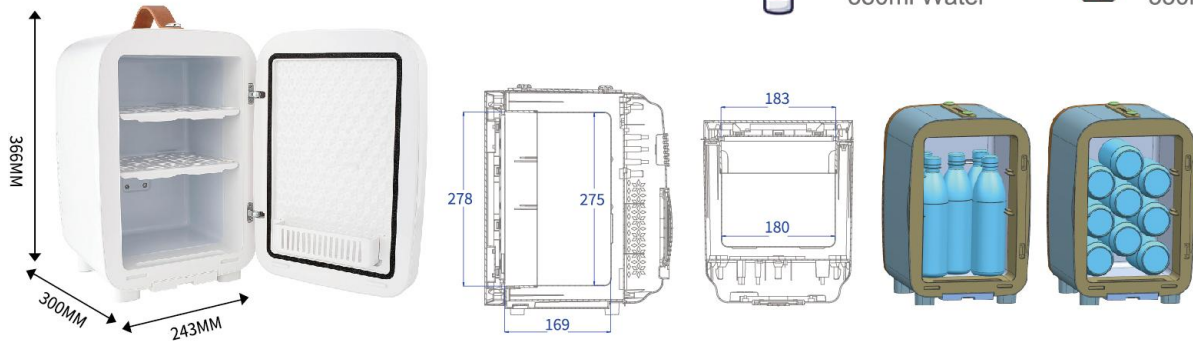


MFA-15L-RA4

KITCHEN GARBAGE COOLER AND WARMER

- 1.Voltage:AC 100-240V or DC 12V
- 2.Volume:15 Litre
- 3.Power consumption:50W±10%

Inner Box Size:395*313*458(mm)	Carton Size:655*410*470(mm)
PACKING:1PC/Inner Box 2PCS/CTN	
N.W/G.W.(KGS):4.9/5.7	QTY/20"/40"/40*HC(PCS):440/913/1070

8 BOTTLES* 380ml Water 16 CANS* 330ml Cola

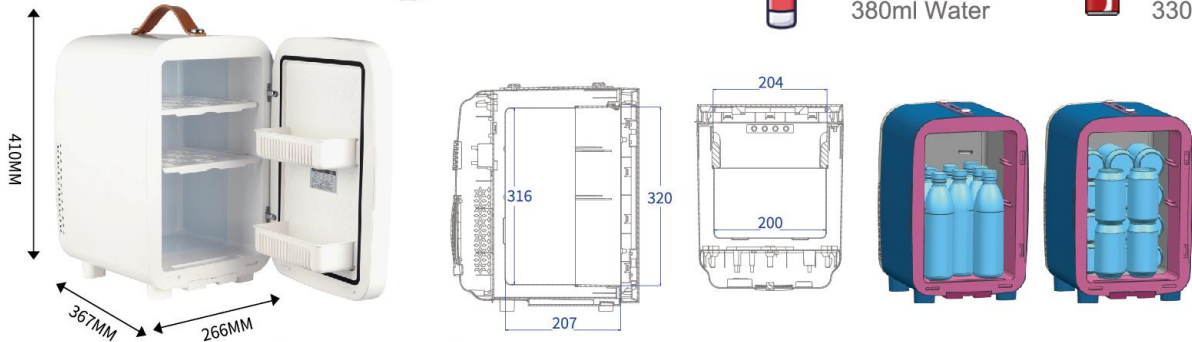


MFA-15L-RA2

THERMOELECTRIC COOLER AND WARMER

- 1.Voltage:AC 100-240V or DC 12V
- 2.Volume:15 Litre
- 3.Power consumption:50W±10%

Inner Box Size:385*313*458(mm)	Carton Size:655*410*470(mm)
PACKING:1PC/Inner Box 2PCS/CTN	
N.W/G.W.(KGS):4.9/5.7	QTY/20"/40"/40*HC(PCS):440/913/1070

8 BOTTLES* 380ml Water 16 CANS* 330ml Cola

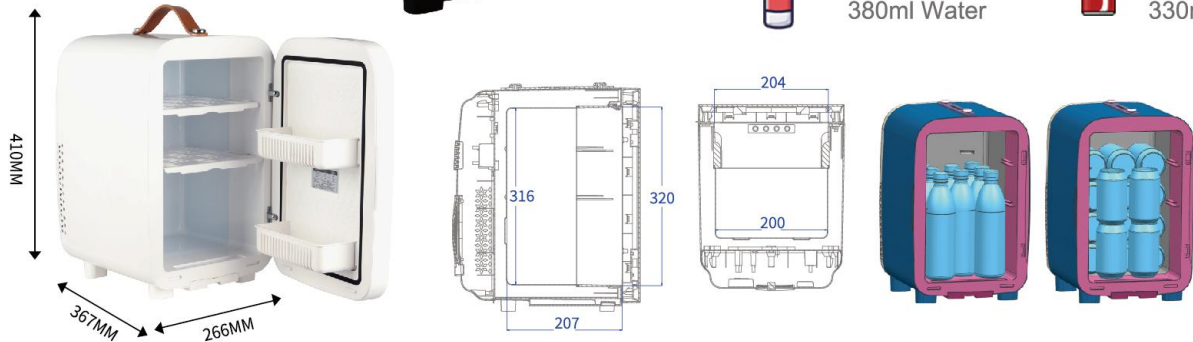

HEATING 50-65℃
COOLING 5-8℃
TA: 25℃




MFA-9L
THERMOELECTRIC COOLER AND WARMER

- 1.Voltage:DC 12V and AC 220V-240V or AC 100-120V
- 2.Volume:9 Litre
- 3.Power consumption:50W±10%

Inner Box Size:296*298*358(mm)	Carton Size:620*620*380(mm)
PACKING:1PC/Inner Box 4PCS/CTN	
N.W/G.W.(KGS):10.6/15.0	QTY/20"/40"/40*HC(PCS):760/1600/1900

7 BOTTLES* 380ml Water
9 CANS* 330ml Cola

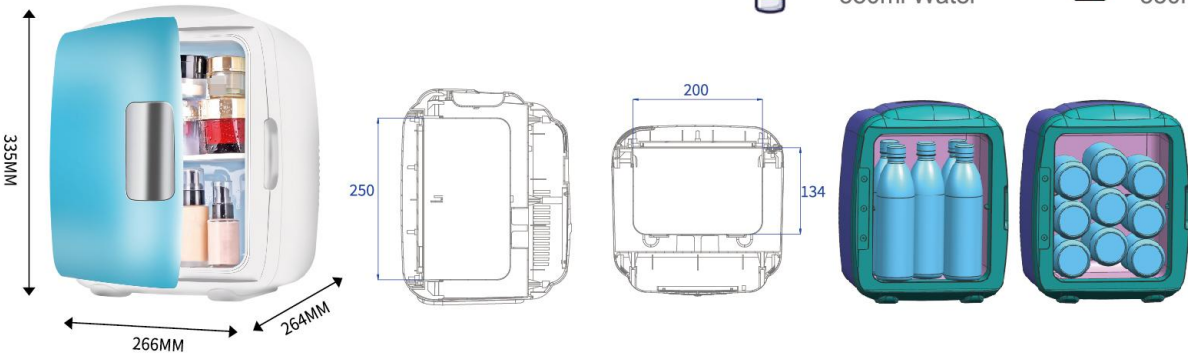

HEATING 50-65℃
COOLING 5-8℃
TA: 25℃




MFA-15L
THERMOELECTRIC COOLER AND WARMER(Single cooling)

- 1.Voltage:DC 12V and AC220V-240V or AC 100-120V
- 2.Volume:15 Litre
- 3.Power consumption:50W±10%

Inner Box Size:394*324*445(mm)	Carton Size:668*410*475(mm)
PACKING:1PC/Inner Box 2PCS/CTN	
N.W/G.W.(KGS):9.5/12.5	QTY/20"/40"/40*HC(PCS):450/1000/1100

17 BOTTLES* 380ml Water
20 CANS* 330ml Cola

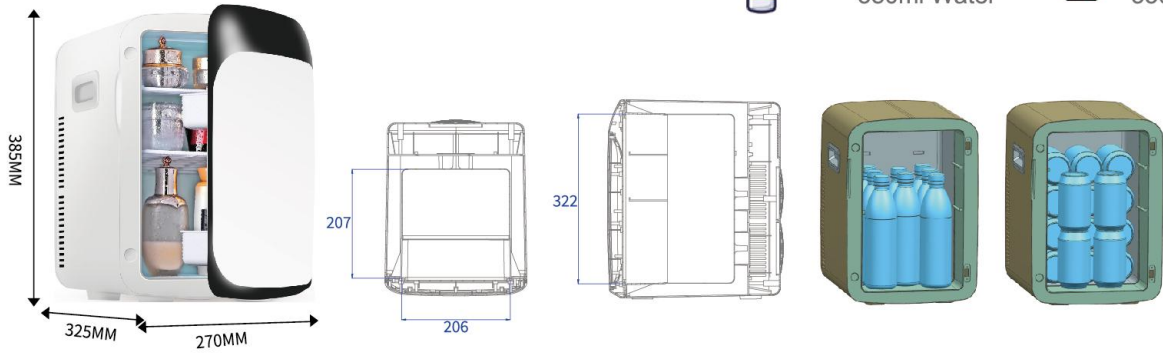

HEATING 50-65℃
COOLING 5-8℃
TA: 25℃




MFA-14L
THERMOELECTRIC COOLER AND WARMER

- 1.Voltage:DC 12V and AC 220V-240V or AC 100-120V
- 2.Volume:12.8 Litre
- 3.Power consumption:50W±10%

Inner Box Size:321*392*403(mm)	Carton Size:650*415*420(mm)
PACKING:1PC/Inner Box 2PCS/CTN	
N.W/G.W.(KGS):12.0/13.0	QTY/20"/40"/40*HC(PCS):550/1050/1200

15 BOTTLES* 380ml Water
12 CANS* 330ml Cola

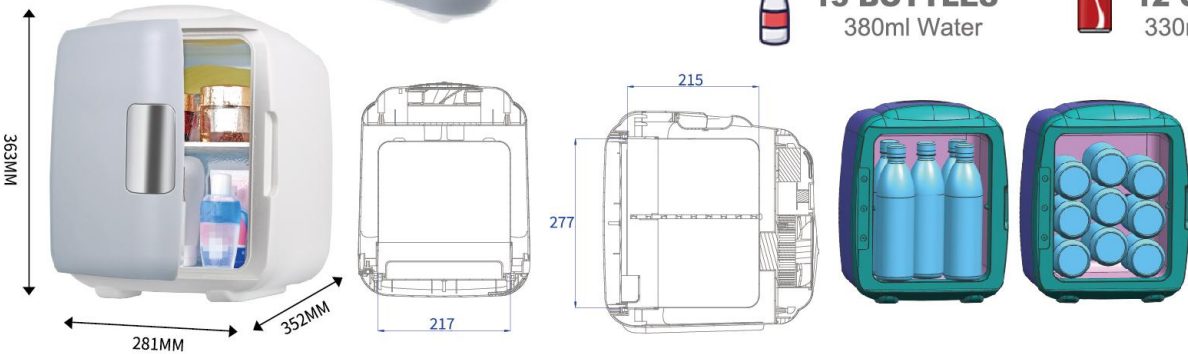

HEATING 50-65℃
COOLING 0-5℃
TA: 25℃




MFA-15L-L
THERMOELECTRIC COOLER AND WARMER(Dual cooling)

- 1.Voltage:DC 12V and AC220V-240V or AC 100-120V
- 2.Volume:15 Litre
- 3.Power consumption:50W±10%

Inner Box Size:394*324*445(mm)	Carton Size:668*410*475(mm)
PACKING:1PC/Inner Box 2PCS/CTN	
N.W/G.W.(KGS):9.8/13.0	QTY/20"/40"/40*HC(PCS):450/1000/1100

17 BOTTLES* 380ml Water
20 CANS* 330ml Cola

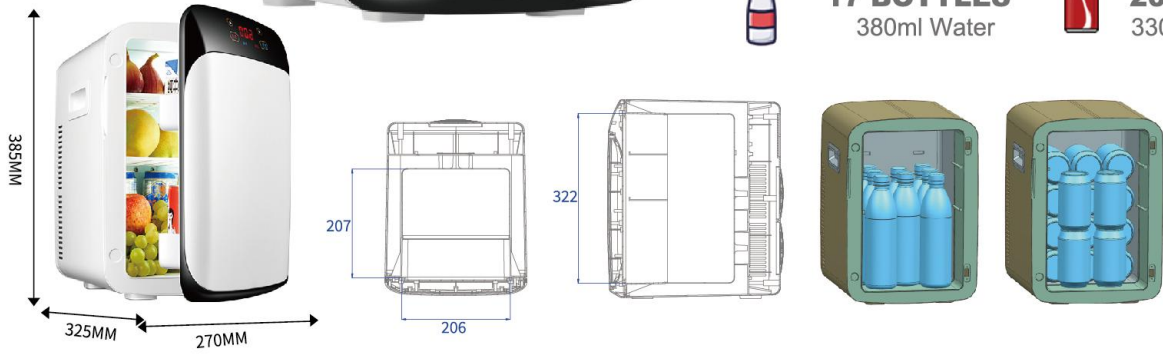

HEATING 50-65℃
COOLING 5-8℃
TA: 25℃




MFA-15L-C

THERMOELECTRIC COOLER AND WARMER(Single cooling)

- 1.Voltage:DC 12V and AC 220V-240V or AC 100-120V
- 2.Volume:15 Litre
- 3.Power consumption:50W±10%

Inner Box Size:380*315*432(mm)	Carton Size:395*645*450(mm)
PACKING:1PC/Inner Box 2PCS/CTN	
N.W/G.W.(KGS):9.6/12.8	QTY/20"/40"/40*HC(PCS):450/1000/1100

17 BOTTLES* 380ml Water
20 CANS* 330ml Cola

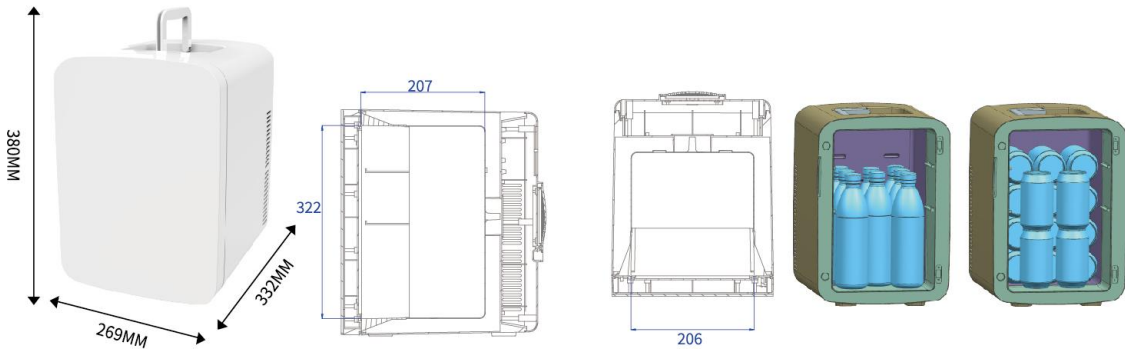

HEATING 50-65℃
COOLING 0-5℃
TA: 25℃




MFA-15L-O

THERMOELECTRIC COOLER AND WARMER(Dual cooling)

- 1.Voltage:DC 12V and AC 220V-240V or AC 100-120V
- 2.Volume:15 Litre
- 3.Power consumption:71W±10%

Inner Box Size:380*315*432(mm)	Carton Size:395*645*450(mm)
PACKING:1PC/Inner Box 2PCS/CTN	
N.W/G.W.(KGS):10.0/13.5	QTY/20"/40"/40*HC(PCS):450/1000/1100

17 BOTTLES* 380ml Water
20 CANS* 330ml Cola

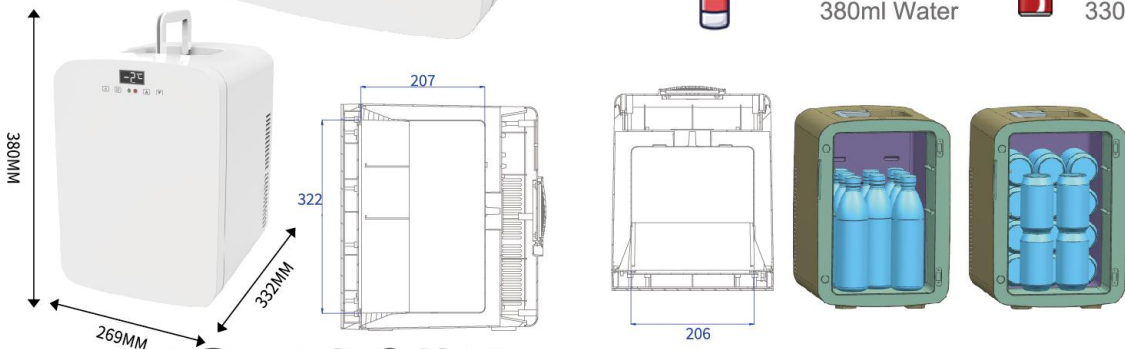

HEATING 50-65℃
COOLING 0-5℃
TA: 25℃




MFA-20L-F

THERMOELECTRIC COOLER AND WARMER(Dual cooling)

- 1.Voltage:DC 12V and AC220V-240V or AC 100-120V
- 2.Volume:20 Litre
- 3.Power consumption:71W±10%

Inner Box Size:415*365*495(mm)	Carton Size:750*435*515(mm)
PACKING:1PC/Inner Box 2PCS/CTN	
N.W/G.W.(KGS):12/16	QTY/20"/40"/40*HC(PCS):400/800/1000

19 BOTTLES* 380ml Water
22 CANS* 330ml Cola

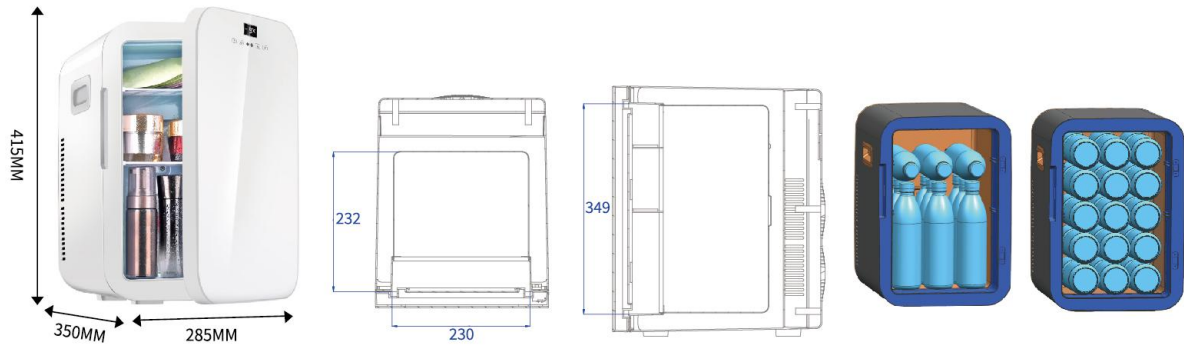

HEATING 50-65℃
COOLING 0-5℃
TA: 25℃




MFA-20L-I

THERMOELECTRIC COOLER AND WARMER(Dual cooling)

- 1.Voltage:DC 12V and AC220V-240V or AC 100-120V
- 2.Volume:20 Litre
- 3.Power consumption:71W±10%

Inner Box Size:415*365*495(mm)	Carton Size:750*435*515(mm)
PACKING:1PC/Inner Box 2PCS/CTN	
N.W/G.W.(KGS):11/15	QTY/20"/40"/40*HC(PCS):400/800/1000

19 BOTTLES* 380ml Water
22 CANS* 330ml Cola

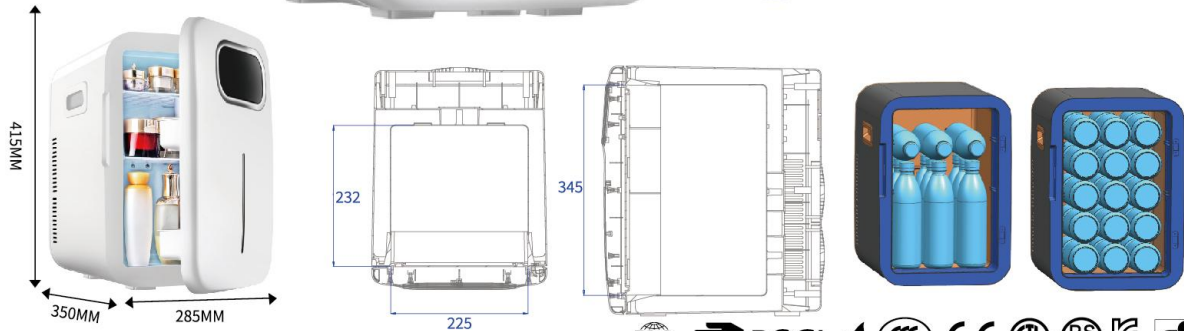

HEATING 50-65℃
COOLING 0-5℃
TA: 25℃




MFA-26L-B
THERMOELECTRIC COOLER AND WARMER(Dual cooling)

- 1.Voltage:DC 12V and AC220V-240V or AC 100-120V
- 2.Volume:25 Litre
- 3.Power consumption:71W±10%

Inner Box Size:408*387*564(mm)	Carton Size:420*400*580(mm)
PACKING:1 PC/CTN	
N.W/G.W.(KGS):8.5/10	QTY/20"/40"/40"HC(PCS):310/570/660

22 BOTTLES* 380ml Water
29 CANS* 330ml Cola

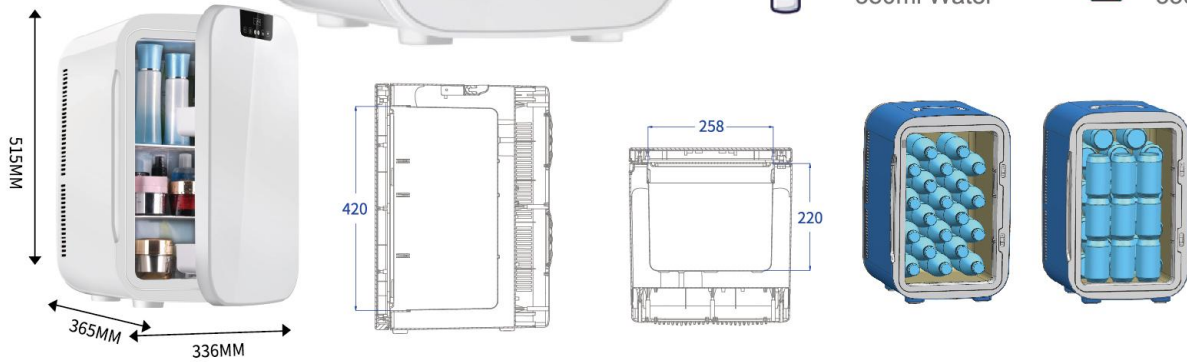

HEATING 50-65℃
COOLING 0-5℃
TA: 25℃



MFA-28L-A
THERMOELECTRIC COOLER AND WARMER(Dual cooling)

- 1.Voltage:DC 12V and AC220V-240V or AC 100-120V
- 2.Volume:25 Litre
- 3.Power consumption:71W±10%

Carton Size:410*385*565(mm)	
PACKING:1PC/CTN	
N.W/G.W.(KGS):7/7.8	QTY/20"/40"/40"HC(PCS):320/670/780

22 BOTTLES* 380ml Water
29 CANS* 330ml Cola



COMPRESSOR FRIDGE
APPLY TO
CAR, OUTDOOR, CAMPING, FAMILY PARTY, FISHING

- Dual Purpose
- Low Noise
- down to -20℃
- Seismic and anti Shake
- Pulley/Pull Rod
- Double Door Design
- Battery Protection
- lithium battery
- Double Control



The handle and wheels in the picture are options ,
Not standard





NEW

C055-030

- 1.Volume:30 Litre
- 2.Insulation layer:PU Foam
- 3.Cooling:-20-20°C(ambient temperature 32°C,no load)
- 4.Optional accessories: Bottle opener, Divider, Ice tray, Metal basket

Area1 size:337x300x245.5(mm)	Area2 size:132x300x89(mm)
External Size:633x392x344.5(mm)	PACKING:1PC/Inner Box 1PCS/CTN
N.W/G.W(KGS):13.2/15.5	QTY/20"/40"/40"HC(PCS):240/495/594



NEW

C055-040

- 1.Volume:40 Litre
- 2.Insulation layer:PU Foam
- 3.Cooling:-20-20°C(ambient temperature 32°C,no load)
- 4.Optional accessories: Bottle opener, Divider, Ice tray, Metal basket

Area1 size:337x300x305(mm)	Area2 size:132x300x149(mm)
External Size:633x392x404.5(mm)	PACKING:1PC/Inner Box 1PCS/CTN
N.W/G.W(KGS):15.2/17.5	QTY/20"/40"/40"HC(PCS):220/445/528



NEW

C055-050

- 1.Volume:50 Litre
- 2.Insulation layer:PU Foam
- 3.Cooling:-20-20°C(ambient temperature 32°C,no load)
- 4.Optional accessories: Bottle opener, Divider, Ice tray, Metal basket

Area1 size:337x300x365.5(mm)	Area2 size:132x300x209(mm)
External Size:633x392x464.5(mm)	PACKING:1PC/Inner Box 1PCS/CTN
N.W/G.W(KGS):17.2/19.5	QTY/20"/40"/40"HC(PCS):187/384/457





C055-030M

- 1. Volume:30 Litre
- 2. Material: Sheet metal
- 3. Cooling:-20-20°C(ambient temperature 32°C,no load)



C055-040M

- 1. Volume:40 Litre
- 2. Material: Sheet metal
- 3. Cooling:-20-20°C(ambient temperature 32°C,no load)




COOLING
-22-24℃
TA: 32℃(no load)



C052-035

- 1.Voltage:DC 12-24V and AC 100V-240V (with an adapter)
- 2.Volume:37 Litre
- 3.Cooling:-22-24℃(ambient temperature 32℃,no load)


Inner Size:390x328x337(mm)	Inner Box Size:740x475x510(mm)
Carton Size:758x493x525(mm)	PACKING:1PC/CTN
N.W/G.W(KGS):25/26.5	QTY/20"/40"/40"HC(PCS):130/270/320

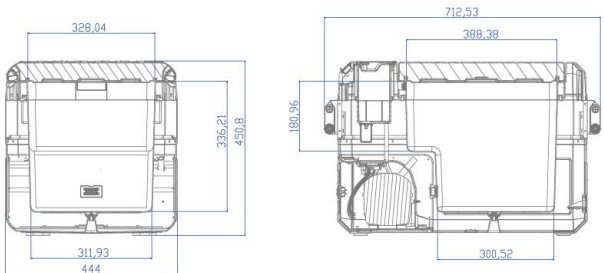

C052-055

- 1.Voltage:DC 12-24V and AC 100V-240V (with an adapter)
- 2.Volume:55 Litre
- 3.Cooling:-22-24℃(ambient temperature 32℃,no load)

Inner Size:495x368x337(mm)	Inner Box Size:844x515x510(mm)
Carton Size:862x533x525(mm)	PACKING:1PC/CTN
N.W/G.W(KGS):29/30.8	QTY/20"/40"/40"HC(PCS):100/225/260

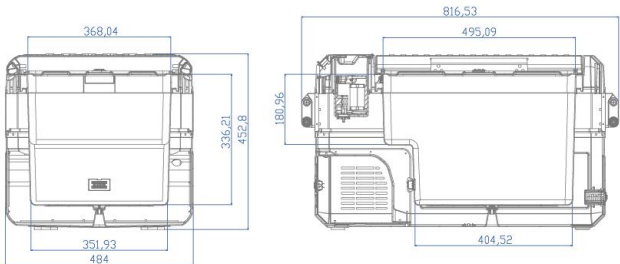


COOLING
-20-20℃
TA: 32℃(no load)



C056-072

- 1.Voltage:DC 12-24V and AC 100V-240V (with an adapter)
- 2.Volume:72 Litre
- 3.Cooling:-20-20℃(ambient temperature 32℃,no load)

Inner Size:291x422x291(mm)x2	Inner Box Size:1007x580x513(mm)
Carton Size:1023x600x525(mm)	PACKING:1PC/CTN
N.W/G.W(KGS):31/34.2	QTY/20"/40"/40"HC(PCS):72/160/200

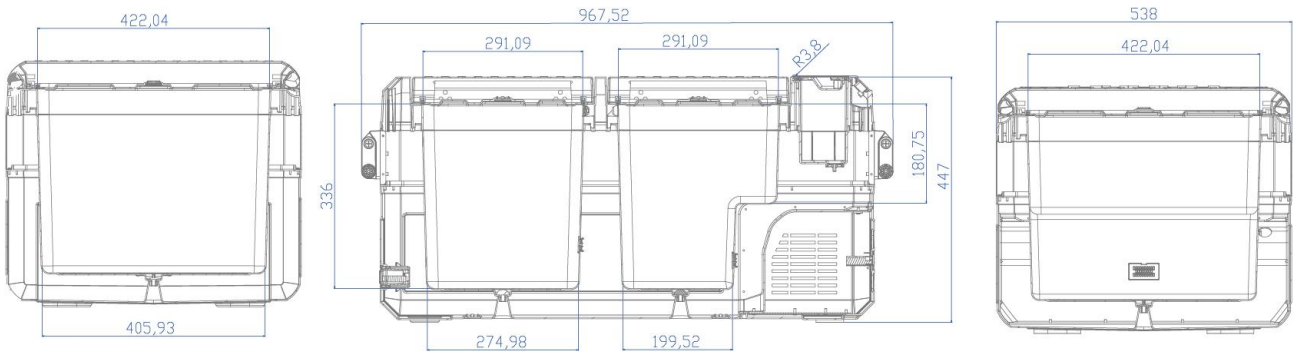

COOLING
-22-24°C


TA: 32°C(no load)



C052-022M

- 1.Voltage:DC 12-24V and AC 100V-240V (with an adapter)
- 2.Volume:22 Litre
- 3.Cooling:-22-24°C(ambient temperature 32°C,no load)


Inner Size:486x263x212(mm)	Carton Size:683x406x385(mm)
PACKING:1PC/CTN	
QTY/20"/40"/40"HC(PCS):230/540/630	

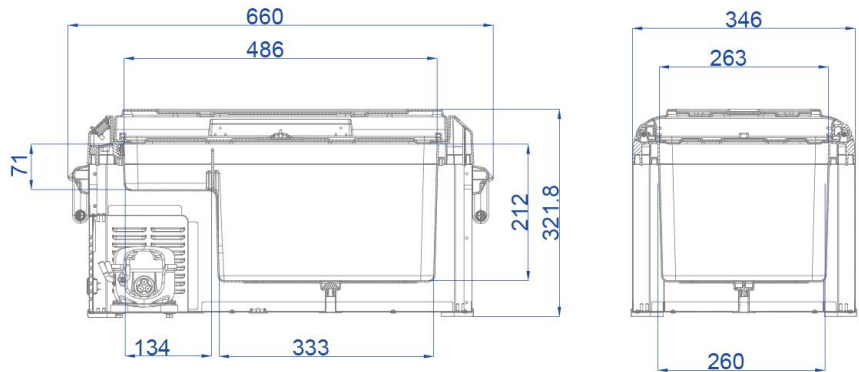

C052-32M

- 1.Voltage:DC 12-24V and AC 100V-240V (with an adapter)
- 2.Volume:35 Litre
- 3.Cooling:-20-24°C(ambient temperature 32°C,no load)

Inner Size:486*263*316(mm)	Outer Size:660*346*422(mm)
Carton Size:695*418*500(mm)	
N.W/G.W(KGS):13.75/16.25	QTY/20"/40"/40"HC(PCS):180/360/450

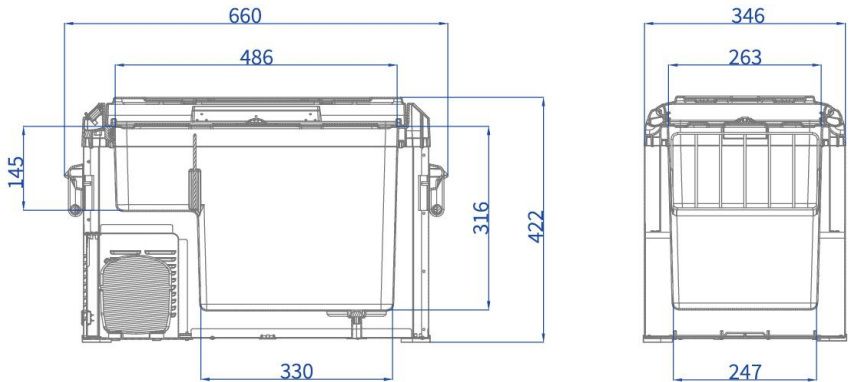


NEW



C053-040M

- 1.Voltage:DC 12-24V and AC 100V-240V (with an adapter)
- 2.Volume:38 Litre
- 3.Cooling:-22-24°C(ambient temperature 32°C,no load)


Inner Size1:193x323x145(mm)	Inner Size2:283x323x331(mm)
Carton Size:733x481x505(mm)	PACKING:1PC/CTN
QTY/20"/40"/40"HC(PCS):140/320/380	

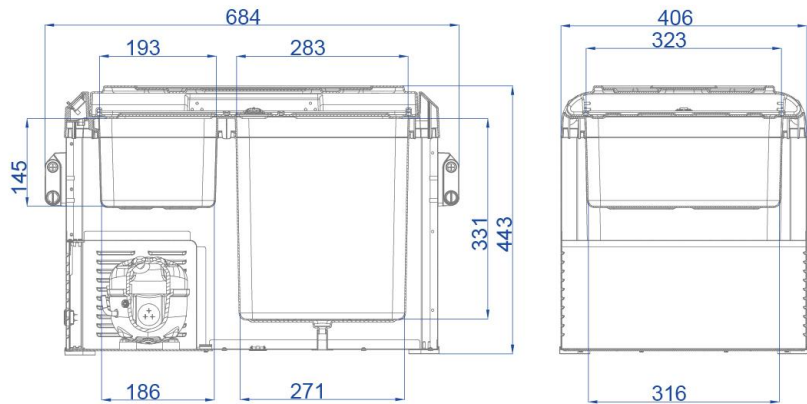

C053-050M

- 1.Voltage:DC 12-24V and AC 100V-240V (with an adapter)
- 2.Volume:47 Litre
- 3.Cooling:-22-24°C(ambient temperature 32°C,no load)

Inner Size1:193x323x207(mm)	Inner Size2:283x323x398(mm)
Carton Size:733x481x570(mm)	PACKING:1PC/CTN
QTY/20"/40"/40"HC(PCS):120/280/330	

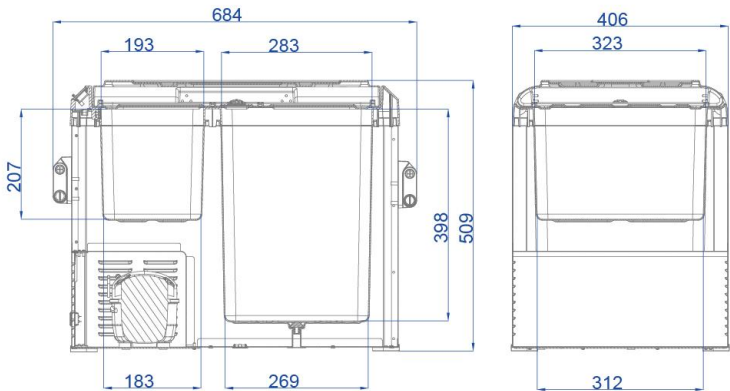


COOLING
-22-24℃
TA: 32℃(no load)



C051-015

- 1.Voltage:DC 12-24V and AC 100V-240V (with an adapter)
- 2.Volume:15 Litre
- 3.Cooling:-22-24℃(ambient temperature 32℃,no load)

Inner Size:358*156*271(mm)	Outer Size:650*235*355(mm)
Carton Size:693*298*415(mm)	
N.W/G.W(KGS):9.65/11.17	QTY/20"/40"/40"HC(PCS):325/640/786

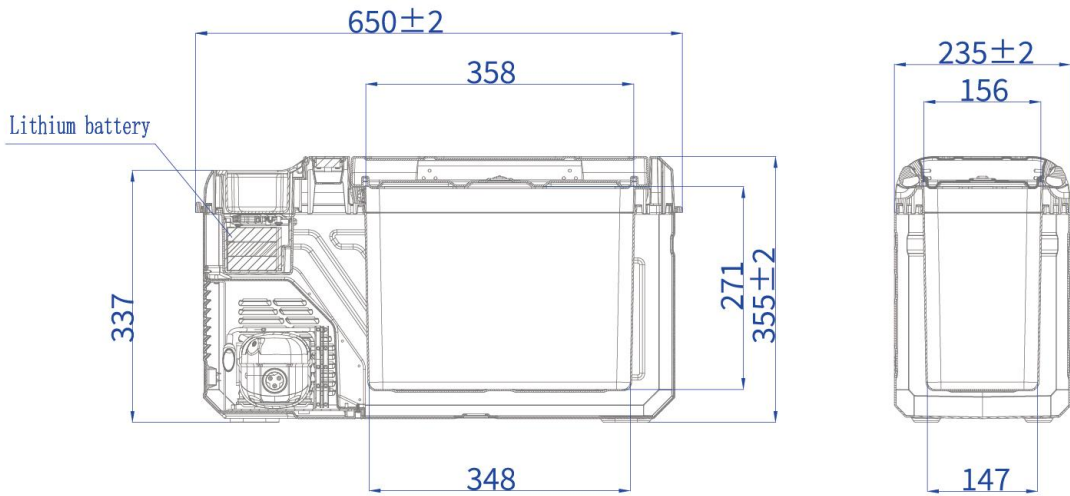


COOLING
-22-24℃
TA: 32℃(no load)



C052-018

- 1.Voltage:DC 12-24V and AC 100V-240V (with an adapter)
- 2.Volume:18 Litre
- 3.Cooling:-22-24℃(ambient temperature 32℃,no load)

Inner Size:486*263*238(mm)	Outer Size:664*346*345(mm)
Carton Size:683*406*405(mm)	
N.W/G.W(KGS):13.04/14.76	QTY/20"/40"/40"HC(PCS):220/445/534

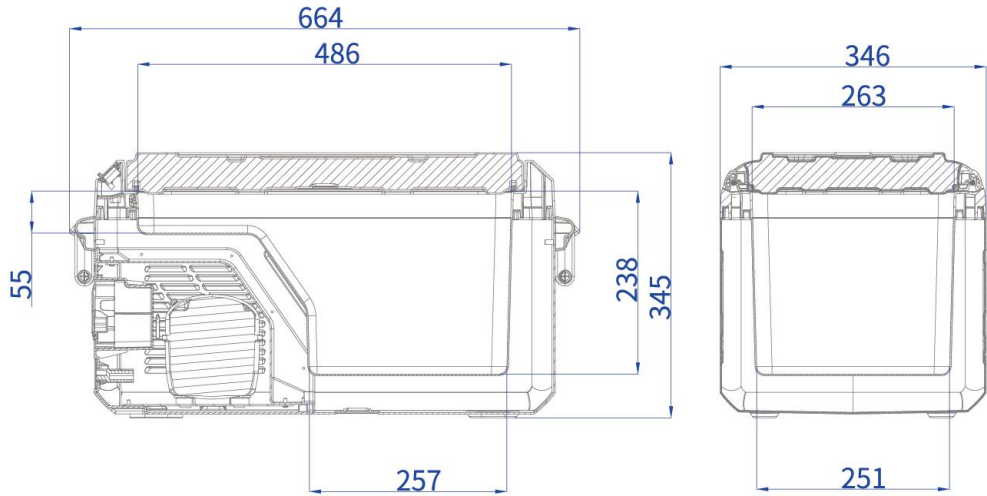

COOLING
-22-24°C
TA: 32°C(no load)

COOLING
-22-24°C
TA: 32°C(no load)



C052-025

- 1.Voltage:DC 12-24V and AC 100V-240V (with an adapter)
- 2.Volume:25 Litre
- 3.Cooling:-22-24°C(ambient temperature 32°C,no load)



Inner Size:486*263*293(mm)	Outer Size:664*346*400(mm)
Carton Size:683*406*460(mm)	
N.W/G.W(KGS):13.5/16.6	QTY/20"/40"/40"HC(PCS):205/418/475



C052-032

- 1.Voltage:DC 12-24V and AC 100V-240V (with an adapter)
- 2.Volume:35 Litre
- 3.Cooling:-22-24°C(ambient temperature 32°C,no load)

Inner Size:486*263*348(mm)	Outer Size:664*346*455(mm)
Carton Size:683*406*515(mm)	
N.W/G.W(KGS):14.2/15.9	QTY/20"/40"/40"HC(PCS):176/356/445

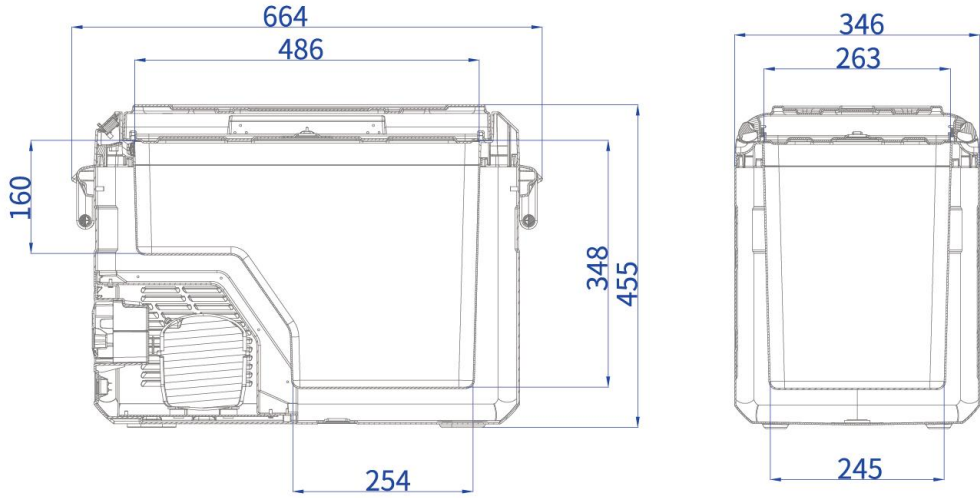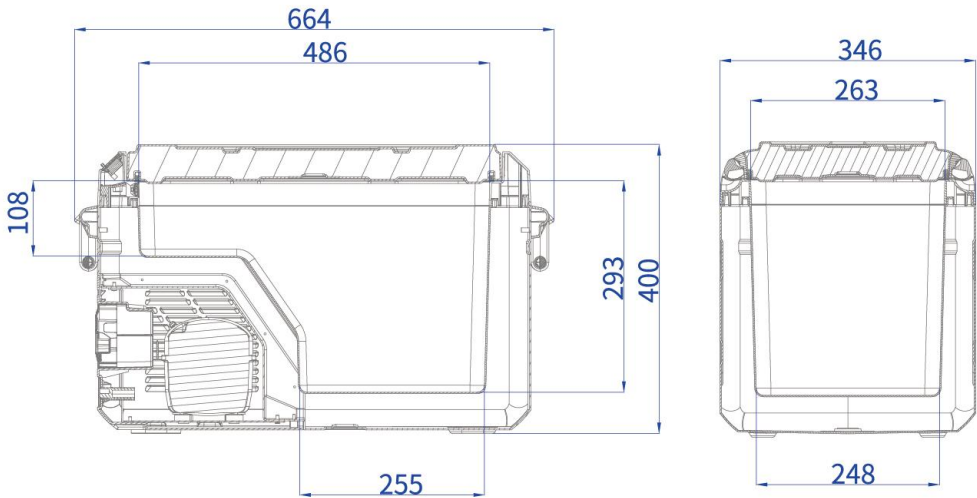

COOLING
-22-24°C



TA: 32°C(no load)



C052-040

- 1.Voltage:DC 12-24V and AC 100V-240V (with an adapter)
- 2.Volume:40 Litre
- 3.Cooling:-22-24°C(ambient temperature 32°C,no load)

Inner Size:510*323*332(mm)	Outer Size:689*406*440(mm)
Carton Size:733*481*501(mm)	
N.W/G.W(KGS):16.6/18.6	QTY/20"/40"/40"HC(PCS):144/288/360

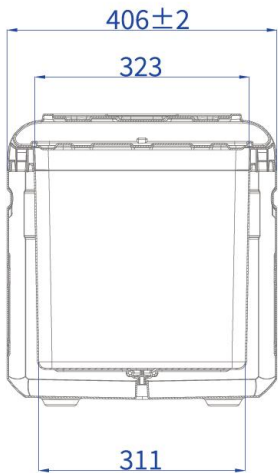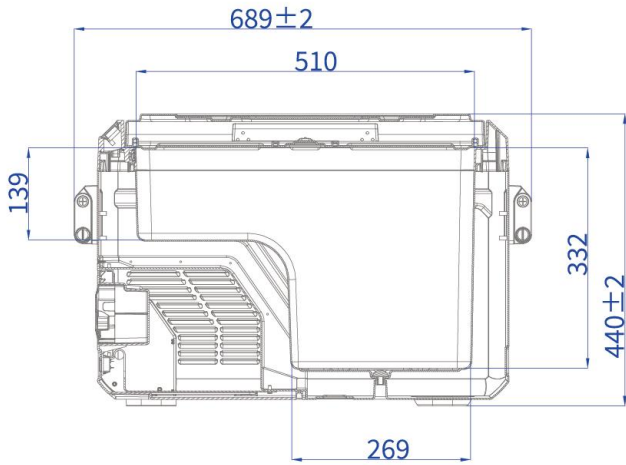

COOLING
-22-24°C




TA: 32°C(no load)



C053-040

- 1.Voltage:DC 12-24V and AC 100V-240V (with an adapter)
- 2.Volume:40 Litre
- 3.Cooling:-20-20°C(ambient temperature 32°C,no load)

Area1 Size:323*284*334(mm)	Area2 Size:323*194*150(mm)
Outer Size:708*323*440(mm)	Carton Size:733*481*501(mm)
N.W/G.W(KGS):20.5/22.8	QTY/20"/40"/40"HC(PCS):144/288/360

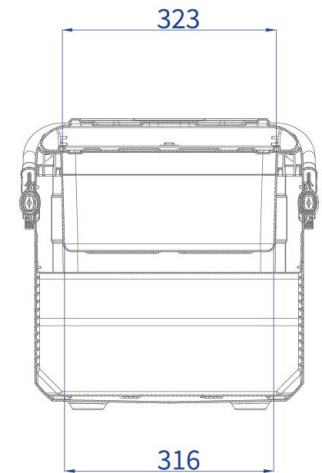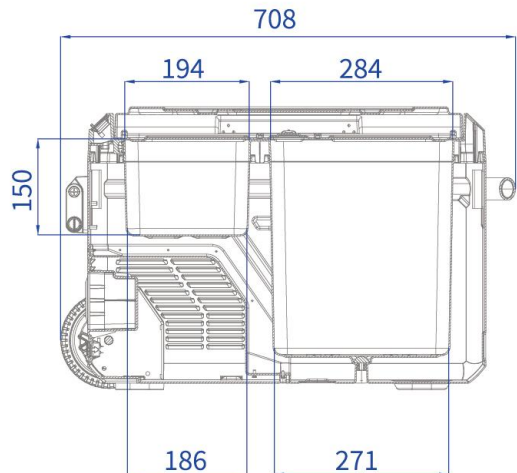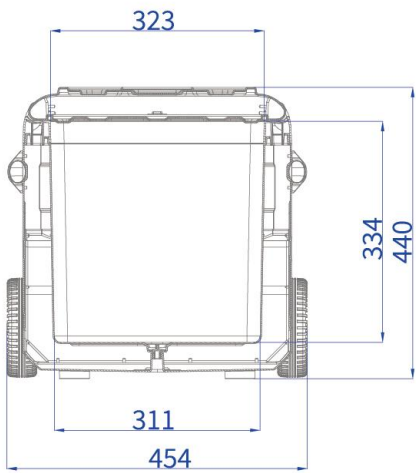

The handle and wheels in the picture are options
Not standard



COOLING
-22-24°C
TA: 32°C(no load)



C052-050

- 1.Voltage:DC 12-24V and AC 100V-240V (with an adapter)
- 2.Volume:50 Litre
- 3.Cooling:-22-24°C(ambient temperature 32°C,no load)

Inner Size:510*323*400(mm)	Outer Size:689*406*505(mm)
Carton Size:733*481*566(mm)	
N.W/G.W(KGS):17.6/19.7	QTY/20"/40"/40*HC(PCS):136/280/280

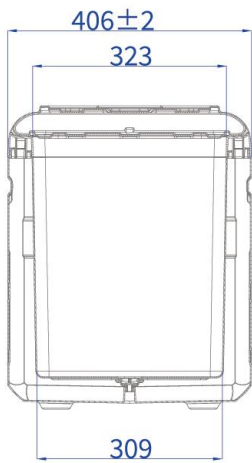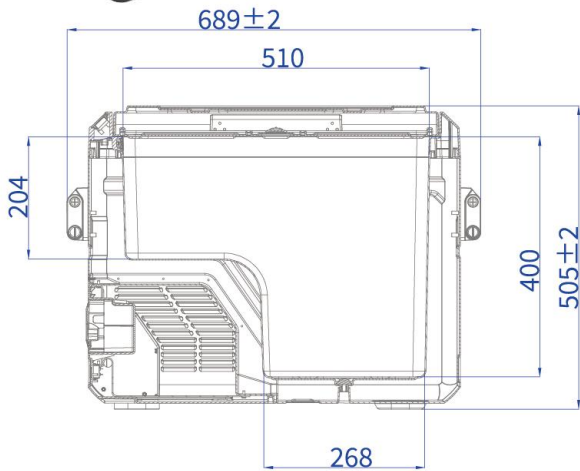




COOLING
-20-20°C
TA: 32°C(no load)



C053-050

- 1.Voltage:DC 12-24V and AC 100V-240V (with an adapter)
- 2.Volume:50 Litre
- 3.Cooling:-20-20°C(ambient temperature 32°C,no load)

Area1 Size:323*284*401(mm)	Area2 Size:323*194*212(mm)
Outer Size:708*323*505(mm)	Carton Size:733*481*566(mm)
N.W/G.W(KGS):22.7/25.7	QTY/20"/40"/40*HC(PCS):136/280/280

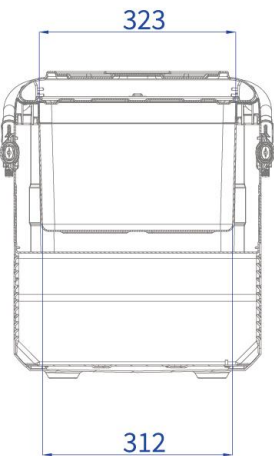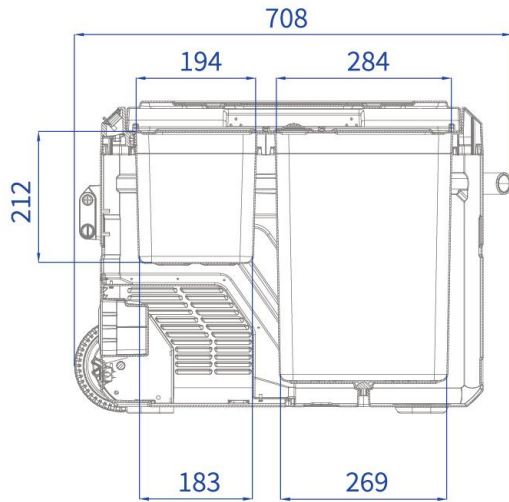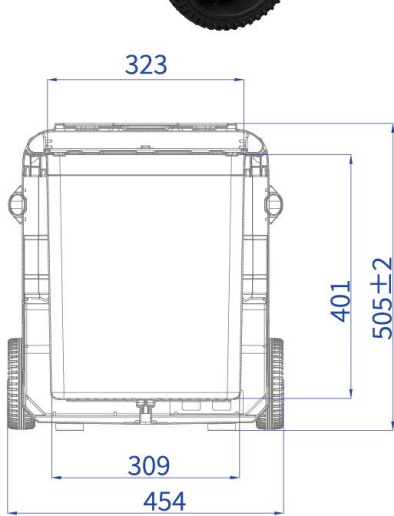

The handle and wheels in the picture are options ,
Not standard



COOLING
-22-24℃
TA: 32℃(no load)



C052-060

- 1.Voltage:DC 12-24V and AC 100V-240V (with an adapter)
- 2.Volume:60 Litre
- 3.Cooling:-22-24℃(ambient temperature 32℃,no load)

Inner Size:510*323*464(mm)	Outer Size:689*406*570(mm)
Carton Size:733*481*631(mm)	
N.W/G.W(KGS):18.1/20.6	QTY/20"/40"/40"H(C/PCS):102/210/280

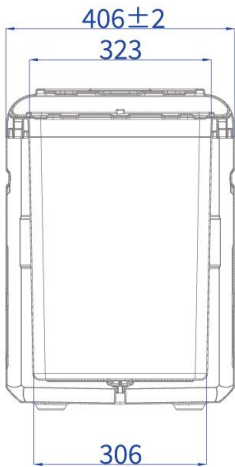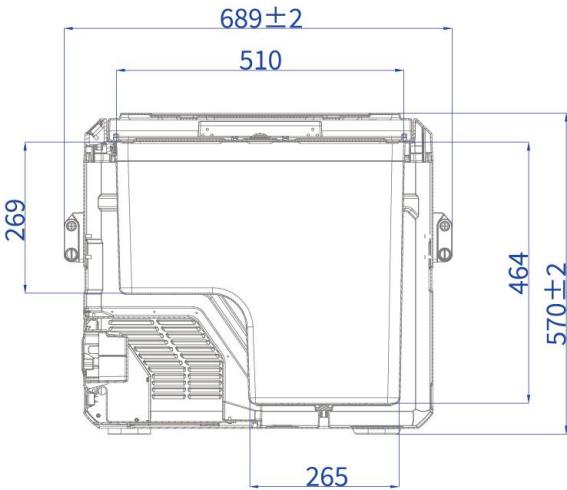




COOLING
-20-20℃
TA: 32℃(no load)



C053-060

- 1.Voltage:DC 12-24V and AC 100V-240V (with an adapter)
- 2.Volume:60 Litre
- 3.Cooling:-20-20℃(ambient temperature 32℃,no load)

Area1 Size:323*284*465(mm)	Area2 Size:323*194*276(mm)
Outer Size:708*323*570(mm)	Carton Size:733*481*631(mm)
N.W/G.W(KGS):22/25	QTY/20"/40"/40"H(C/PCS):102/210/280

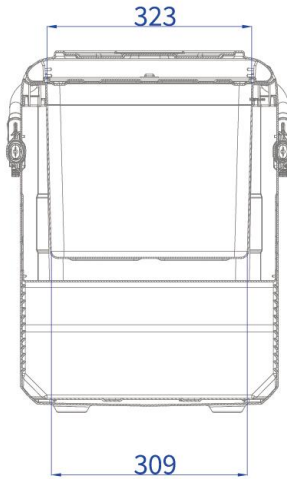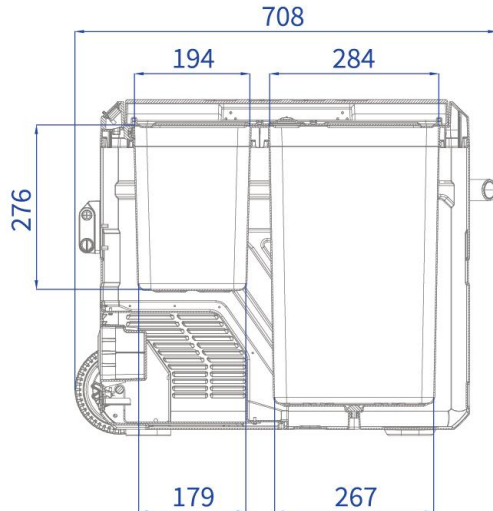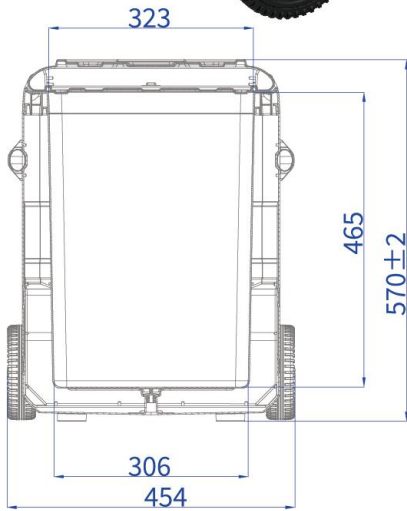



COMPRESSOR FRIDGE
APPLY TO
CAR, OUTDOOR, CAMPING, FAMILY PARTY, FISHING

COMPRESSOR FRIDGE

COOLING
-20-20°C
TA: 32°C(no load)



C056-080

- 1.Voltage:DC 12-24V and AC 100V-240V (with an adapter)
- 2.Volume:80 Litre
- 3.Cooling:-20-20°C(ambient temperature 32°C,no load)

Area1 Size:303*382*355(mm)	Area2 Size:303*382*355(mm)
Outer Size:1066*482*473(mm)	Outer Size:1153*528*473(mm)(with pull bar)
Carton Size:1111*558*538(mm)	Carton Size:1201*580*538(mm)(with pull bar)
N.W/G.W(KGS):23.4/26.4	
QTY/20"/40"/40"HC(PCS):80/168/168	QTY/20"/40"/40"HC(PCS):56/116/116(with pull bar)



The handle and wheels in the picture are options.
Not standard.



Bluetooth App



USB+TYPE C Charging Port



Lithium Battery + Solar Charging Port



Removable Wire Basket



Double Temperature and Control



Wear Resistant Wheels



Three handle options



lid design options



Adapter



DC power cable



USB + Type-C
Charging Cable



Connector



Portable battery




Fridge Stand



Slide



Insulated bag

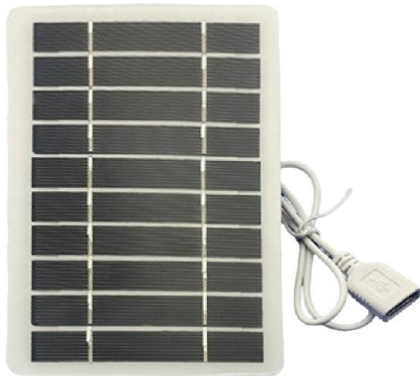

Solar panel



Basket



Detachable battery



COOLING
-18℃
TA: 25℃(No Load)



CFP-35L
COMPRESSOR FRIDGE

- 1.Voltage:DC 12-24V and AC 100V-240V (with an adapter)
- 2.Volume:35 Litre
- 3.Power :55W±10%

Outer Size:620*344*375(mm)	Carton Size:670*395*445(mm)
Inner Size:370*284*300(mm)	PACKING:1PC/CTN
N.W/G.W(KGS):12.5/14.5	QTY/20"/40"/40"(HC)(PCS):150/315/420



CFP-45L
COMPRESSOR FRIDGE

- 1.Voltage:DC 12-24V and AC 100V-240V (with an adapter)
- 2.Volume:45 Litre
- 3.Power :55W±10%

Outer Size:622*346*480(mm)	Carton Size:670*395*550(mm)
Inner Size:373*284*407(mm)	PACKING:1PC/CTN
N.W/G.W(KGS):13.5/15	QTY/20"/40"/40"(HC)(PCS):126/270/360



COOLING
-20℃
TA: 32℃(No Load)



CFP-20L
COMPRESSOR FRIDGE

- 1.Voltage:DC 12-24V and AC 100V-240V (with an adapter)
- 2.Volume:20 Litre
- 3.Power :45W±10%

Outer Size:438*365*405(mm)	Carton Size:505*435*470(mm)
Inner Size:330*267*311(mm)	PACKING:1PC/CTN
N.W/G.W(KGS):11.5/13.5	QTY/20"/40"/40"(HC)(PCS):285/590/690



CFP-30L
COMPRESSOR FRIDGE

- 1.Voltage:DC 12-24V and AC 100V-240V (with an adapter)
- 2.Volume:30 Litre
- 3.Power :50W±10%

Outer Size:438*365*505(mm)	Carton Size:505*435*570(mm)
Inner Size:330*267*411(mm)	PACKING:1PC/CTN
N.W/G.W(KGS):12.5/14.5	QTY/20"/40"/40"(HC)(PCS):250/510/600

COOLING
-18℃
TA: 25℃(No Load)



CBP-C-25L
COMPRESSOR FRIDGE

- 1.Voltage:DC 12-24V and AC 100V-240V (with an adapter)
- 2.Volume:23 Litre
- 3.Power consumption:55W±10%

Outer Size:583*365*344(mm)	Inner Size:283*284*267(mm)
Inner Box Size:672*448*432(mm)	Carton Size:690*465*450(mm)
PACKING:1PC/Inner Box 1PC/CTN	
N.W/G.W(KGS):13/14	QTY/20"/40"/40"HC(PCS):170/380/450



CBP-C-35L
COMPRESSOR FRIDGE

- 1.Voltage:DC 12-24V and AC 100V-240V (with an adapter)
- 2.Volume:32 Litre
- 3.Power consumption:55W±10%

Outer Size:583*365*434(mm)	Inner Size:283*284*357(mm)
Inner Box Size:672*448*522(mm)	Carton Size:690*465*540(mm)
PACKING:1PC/Inner Box 1PC/CTN	
N.W/G.W(KGS):14/15	QTY/20"/40"/40"HC(PCS):150/320/380



CAMPING COOLER BOX
APPLY TO
CAR, OUTDOOR , CAMPING , FAMILY PARTY , FISHING






CBP-25L-B

- 1.Volume:25 Litre
- 2.Insulation layer:PU Foam
- 3.Cooling:18±2°C(ambient temperature 32°C,no load)
- 4.Using decibel:<45dB±10%

Inner Size:340X227X342(mm)	Carton Size:387x318x452(mm)
PACKING:1PC/Inner Box 1PCS/CTN	
N.W/G.W(KGS):4.9/5.8	QTY/20"/40"/40"HC(PCS):450/920/990

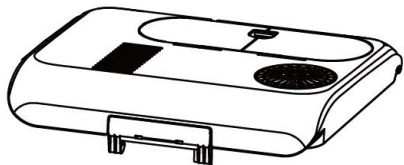

Top Door Cover Option 1



Top Door Cover Option 2



CBP-30L-A

- 1.Volume:30 Litre
- 2.Insulation layer:PU Foam
- 3.Cooling:18±2°C(ambient temperature 32°C,no load)
- 4.Using decibel:<45dB±10%

Inner Size:340X227X402(mm)	Carton Size:442x302x500(mm)
PACKING:1PC/Inner Box 1PCS/CTN	
N.W/G.W(KGS):5.9/6.6	QTY/20"/40"/40"HC(PCS):380/800/900



CBP-40L-A

- 1.Volume:40 Litre
- 2.Insulation layer:PU Foam
- 3.Cooling:18±2°C(ambient temperature 32°C,no load)
- 4.Using decibel:<45dB±10%

Inner Size:410X251X402(mm)	Carton Size:525x332x514(mm)
PACKING:1PC/Inner Box 1PCS/CTN	
N.W/G.W(KGS):7.7/8.3	QTY/20"/40"/40"HC(PCS):240/530/655



COOLING
5-10℃
TA: 25℃



CBP-14L-A
THERMOELECTRIC COOLER AND WARMER

- 1.Voltage:DC 12V
- 2.Volume:14 Litre
- 3.Power consumption:48W±10%

Inner Size:342X233X448mm)	Carton Size:357X248X468(mm)
PACKING:1PC/Inner Box 1PCS/CTN	
N.W/G.W(KGS):3.5/4.5	QTY/20*/40*/40*HC(PCS):720/1460/1690


COOLING
5-10℃
TA: 25℃



CBP-20L-A
THERMOELECTRIC COOLER AND WARMER


- 1.Voltage:DC 12V
- 2.Volume:20 Litre
- 3.Power consumption:48W±10%

Inner Size:342X293X448(mm)	Carton Size:357X308X468mm)
PACKING:1PC/Inner Box 1PCS/CTN	
N.W/G.W(KGS):4.2/5.5	QTY/20*/40*/40*HC(PCS):590/ 1200/1370

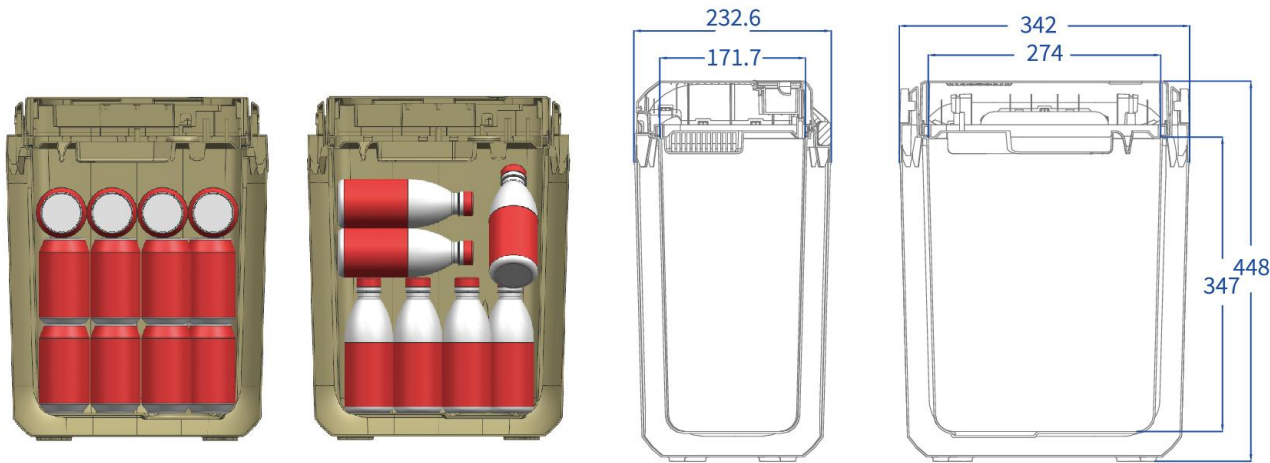

12 BOTTLES*
380ml Water

18 CANS*
330ml Cola

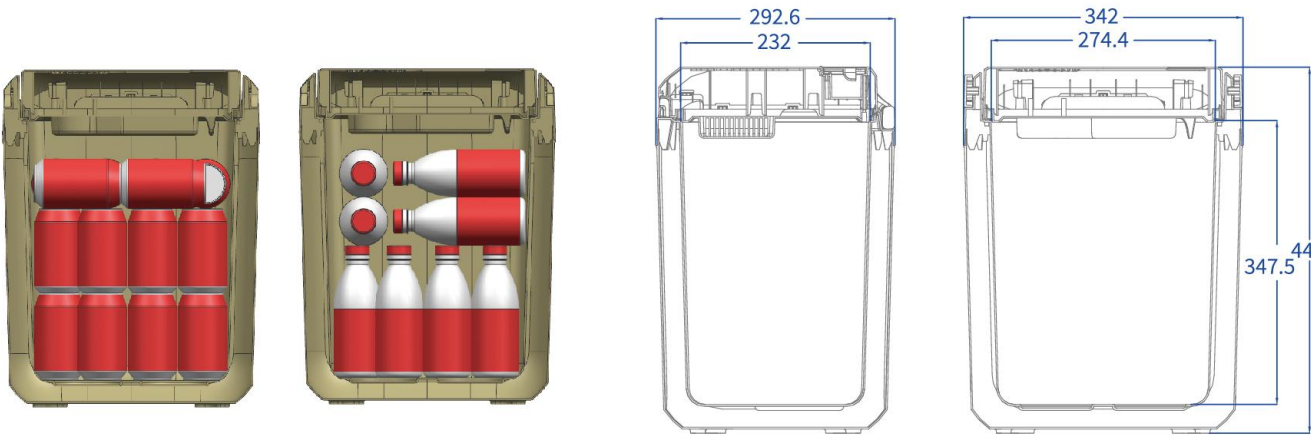

19 BOTTLES*
380ml Water

28 CANS*
330ml Cola



COOLING
5-10℃

TA: 25℃



NEW

CBP-30L-C
THERMOELECTRIC COOLER AND WARMER

- 1.Voltage:DC 12V and AC 220-240V
- 2.Volume:30 Litre
- 3.Power consumption:48W±10%

Inner Size:388X318X502(mm)	Carton Size:403X333X522mm)
PACKING:1PC/Inner Box 1PCS/CTN	
N.W/G.W(KGS):5.0/6.0	QTY/20"/40"/40"H(C/PCS):420/860/1000

COOLING
5-10℃

TA: 25℃




NEW

CBP-40L-C
THERMOELECTRIC COOLER AND WARMER


- 1.Voltage:DC 12V and AC 220-240V
- 2.Volume:40 Litre
- 3.Power consumption:48W±10%

Inner Size:552X359X484(mm)	Carton Size:567X374X504mm)
PACKING:1PC/Inner Box 1PCS/CTN	
N.W/G.W(KGS):6.0/7.5	QTY/20"/40"/40"H(C/PCS):280/570/670

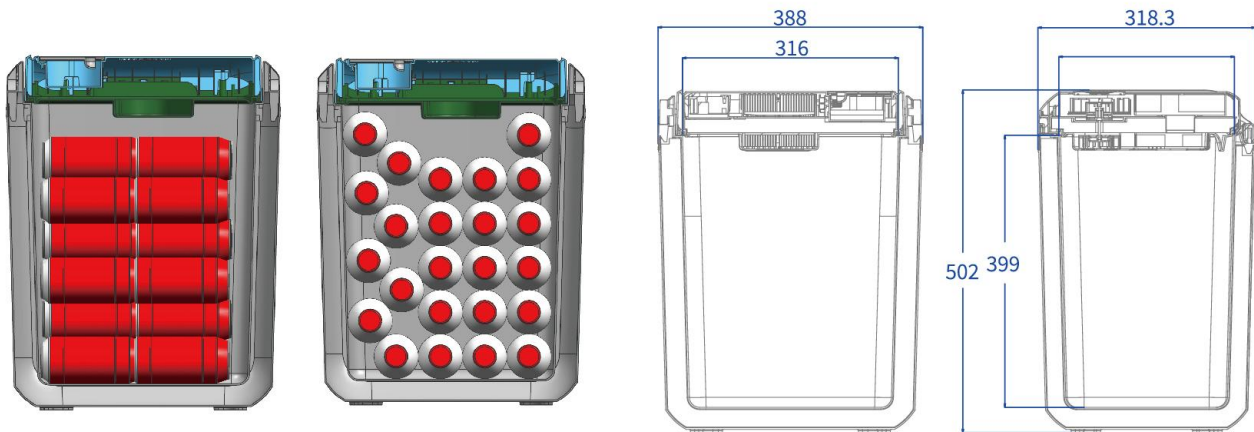

24 BOTTLES*
380ml Water

36 CANS*
330ml Cola

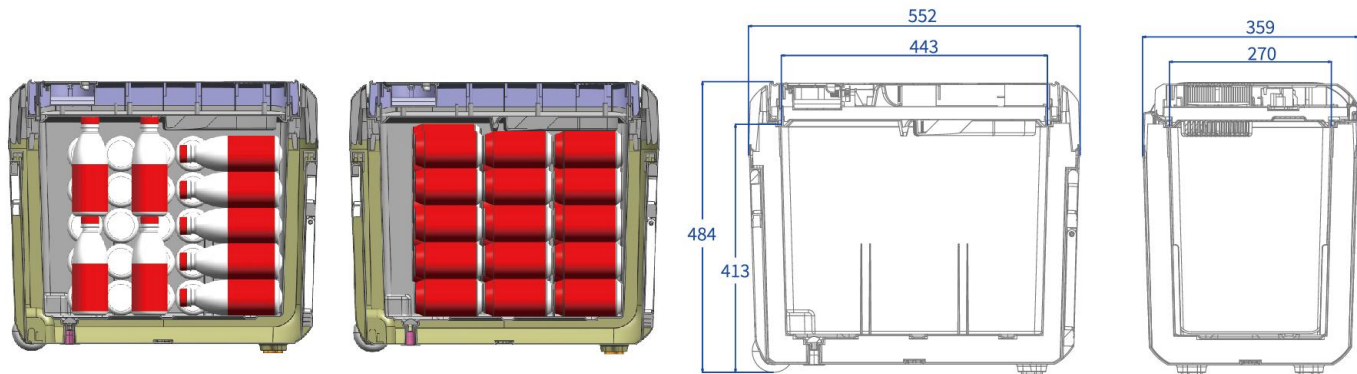

46 BOTTLES*
380ml Water

49 CANS*
330ml Cola



HEATING

50-60℃

COOLING

5-8℃

TA: 25℃







CBP-8L-1

THERMOELECTRIC COOLER AND WARMER

- 1.Voltage:DC 12V
- 2.Volume:8 Litre
- 3.Power consumption:50W±10%

Inner Box Size:209.5*455*299(mm)	Carton Size:419*465*598(mm)
PACKING:1PC/Inner Box 4PCS/CTN	
N.W/G.W(KGS):11/13	QTY/20"/40"/40"HC(PCS):960/1980/2330

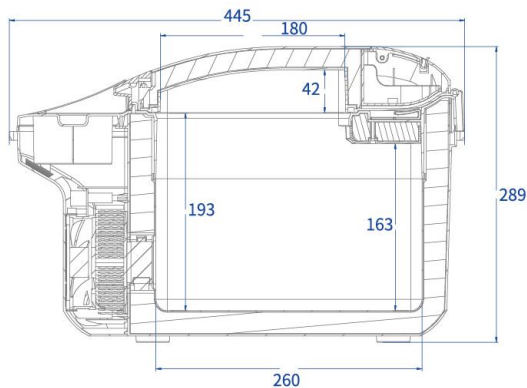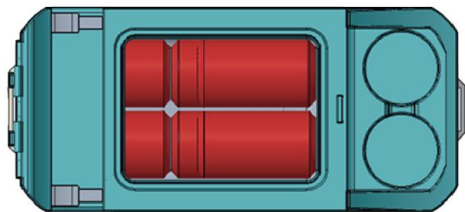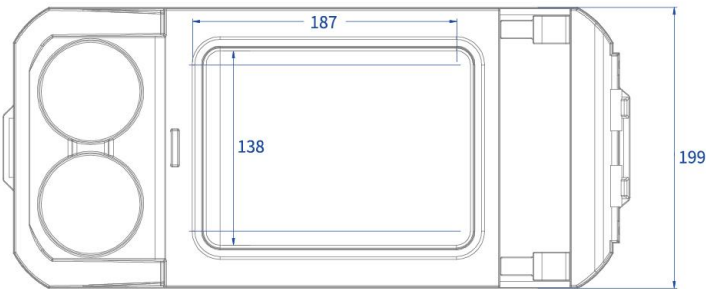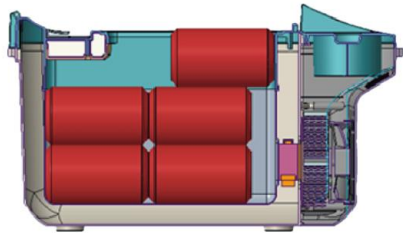

6 BOTTLES*
380ml Water

9 CANS*
330ml Cola



COOLING

5-10℃

TA: 25℃







CBP-25L-1

THERMOELECTRIC COOLER AND WARMER

- 1.Voltage:DC 12V and AC 220V-240V or AC 100-120V
- 2.Volume:25 Litre
- 3.Power consumption:48W±10%

Inner Box Size:393*324*457(mm)	Carton Size:410*341*476(mm)
PACKING:1PC/Inner Box 1PC/CTN	
N.W/G.W(KGS):4.5/5.5	QTY/20"/40"/40"HC(PCS):440/880/1020

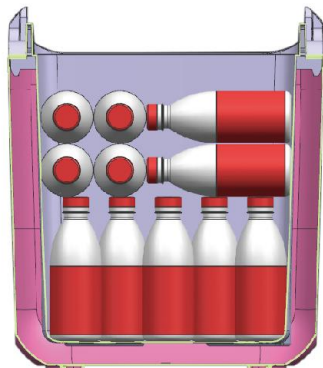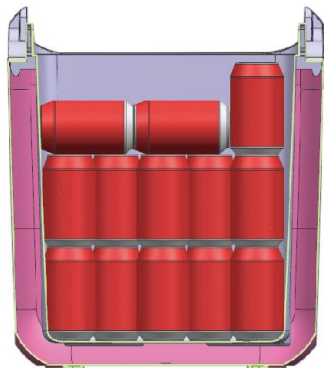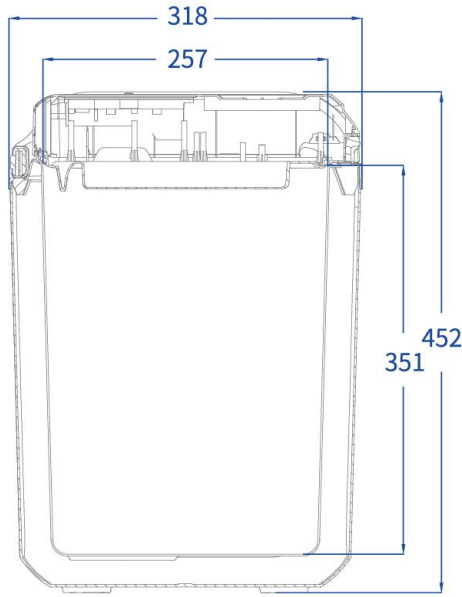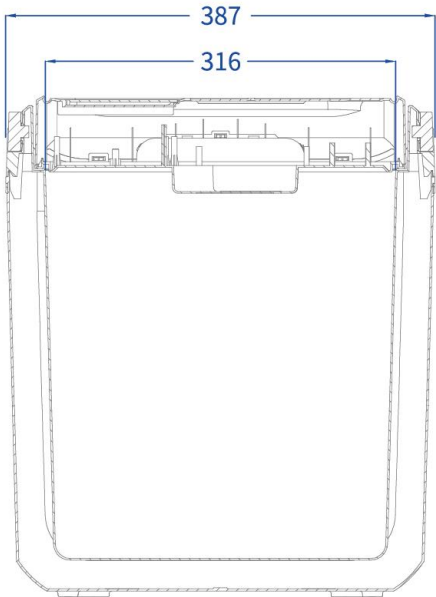

23 BOTTLES*
380ml Water

35 CANS*
330ml Cola



CBP-33L(Digital Display)
THERMOELECTRIC COOLER AND WARMER

- 1.Voltage:DC 12V and AC 220V-240V or AC 100-120V
- 2.Volume:32 Litre
- 3.Power consumption:48W±10%

Inner Box Size:452*355*457(mm)	Carton Size:470*370*470(mm)
PACKING:1PC/Inner Box 1PC/CTN	
N.W/G.W(KGS):5.5/6.5	QTY/20"/40"/40*HC(PCS):240/500/860

CBP-33L-A
THERMOELECTRIC COOLER AND WARMER


- 1.Voltage:DC 12V and AC 220V-240V or AC 100-120V
- 2.Volume:32 Litre
- 3.Power consumption:48W±10%

Inner Box Size:452*355*457(mm)	Carton Size:470*370*470(mm)
PACKING:1PC/Inner Box 1PC/CTN	
N.W/G.W(KGS):5.5/6.5	QTY/20"/40"/40*HC(PCS):240/500/860



 **27 BOTTLES***
380ml Water

 **40 CANS***
330ml Cola

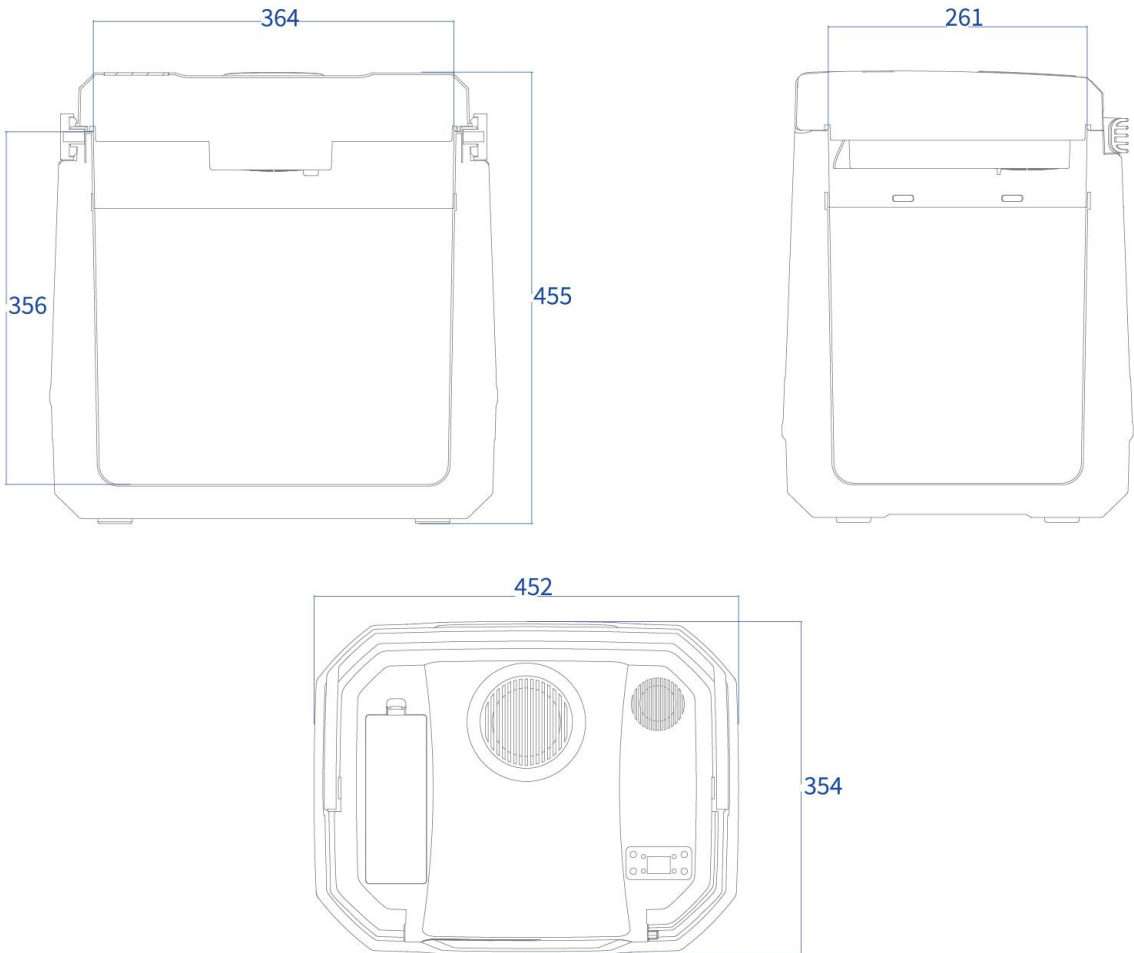

HEATING

50-65℃

COOLING

5-8℃

TA: 25℃







CBP-8L

- 1.Voltage:DC 12V and AC 220V-240V or AC 100-120V
- 2.Volume:8 Litre
- 3.Power consumption:48W±10%

Inner Box Size:410*235*325(mm)	Carton Size:490*425*670(mm)
PACKING:1PC/Inner Box 4PCS/CTN	
N.W/G.W(KGS):11/13	QTY:20*/40*/40*HC(PCS):800/1600/1900

6 BOTTLES*
380ml Water

9 CANS*
330ml Cola

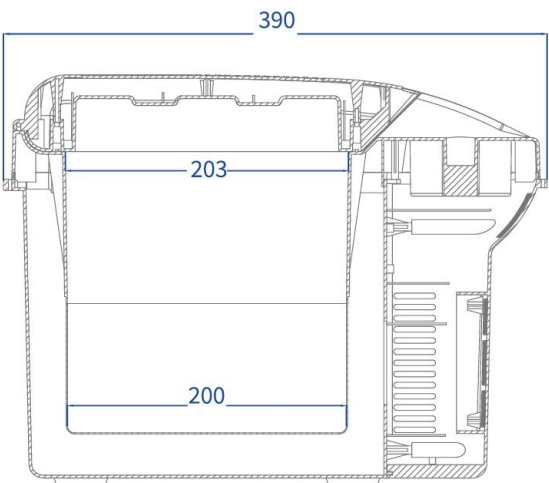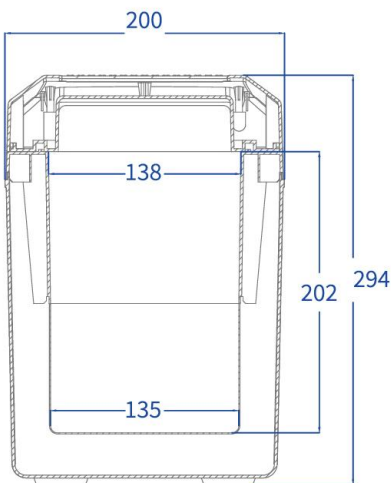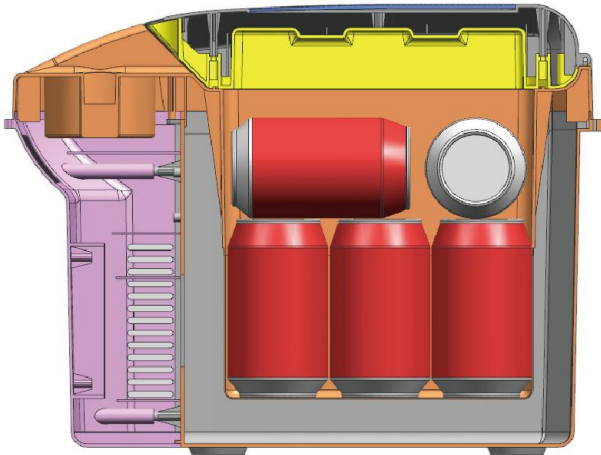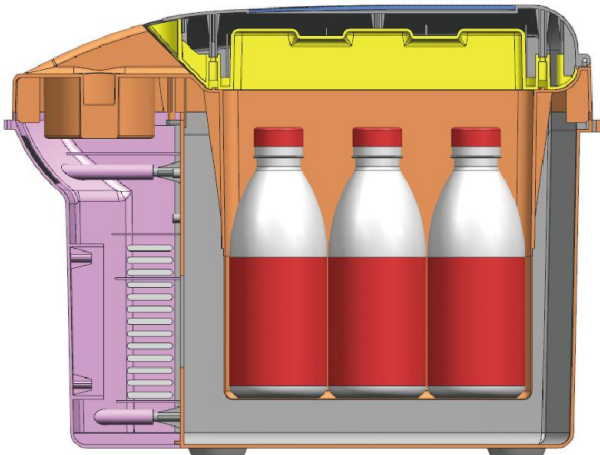

HEATING

50-65℃

COOLING

0-5℃

TA: 25℃







CBP-18L

- 1.Voltage:DC 12V, AC 100V-240V
- 2.Volume:18 Litre
- 3.Power consumption:60W±10%

Inner Box Size:488*340*378(mm)	Carton Size:503*355*393(mm)
PACKING:1PC/Inner Box 1PC/CTN	
N.W/G.W(KGS):5.4/7	QTY:20*/40*/40*HC(PCS):421/900/1020

20 BOTTLES*
380ml Water

24 CANS*
330ml Cola

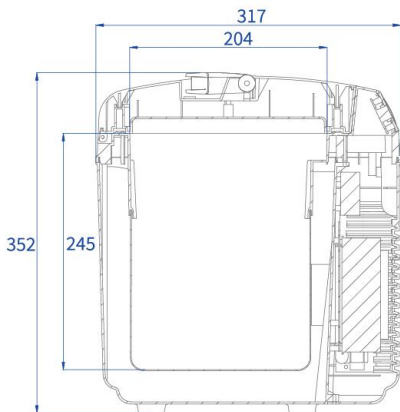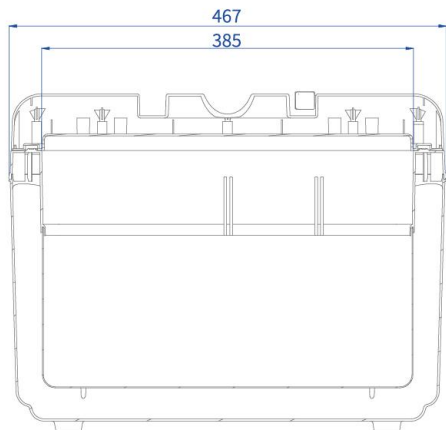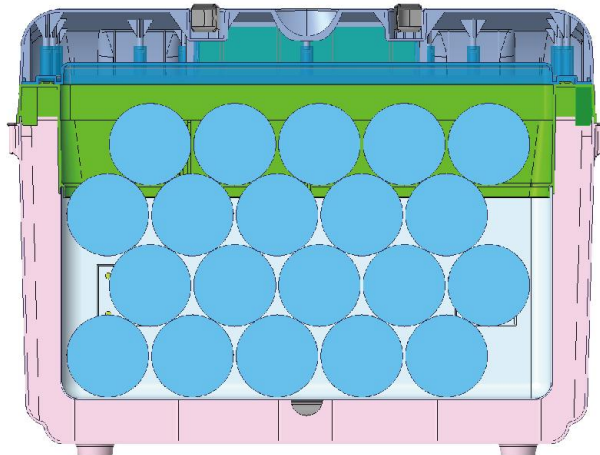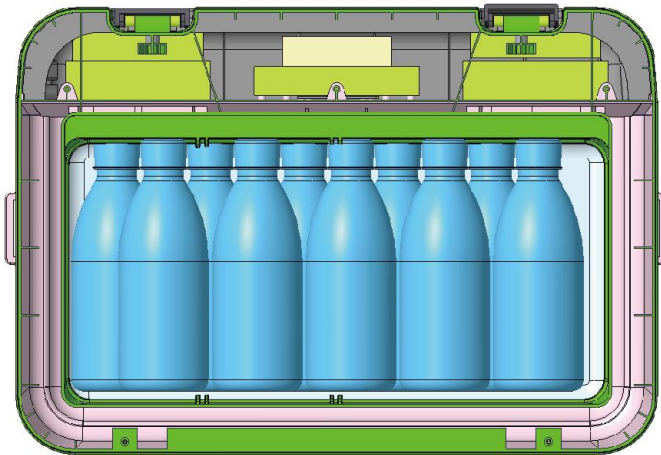

HEATING 50-65℃
COOLING 5-7℃
TA: 25℃



CBP-12L

- 1.Voltage:DC 12V and AC 220V-240V or AC 100-120V
- 2.Volume:12 Litre
- 3.Power consumption:50W±10%

Outer Size:495*257*256(mm)	Inner Size:333*197*178(mm)
Inner Box Size:530*300*300(mm)	Carton Size:620*545*320(mm)
PACKING:1PC/Inner Box 2PCS/CTN	
N.W/G.W(KGS):9.5/10	QTY/20"/40"/40*HC(PCS):500/1030/1200

HEATING 50-65℃
COOLING 0-5℃
TA: 25℃



CBP-24L-B

- 1.Voltage:DC 12V and AC 220V-240V or AC 100-120V
- 2.Volume:24 Litre
- 3.Power consumption:60W±10%

Outer Size:597*313*308(mm)	Inner Size:410*244*220(mm)
Inner Box Size:597*350*335(mm)	Carton Size:610*365*355(mm)
PACKING:1PC/Inner Box 1PC/CTN	
N.W/G.W(KGS):5.2/7	QTY/20"/40"/40*HC(PCS):350/730/820

HEATING 50-65℃
COOLING 5-8℃
TA: 25℃



CBP-30L-A

- 1.Voltage:DC 12V and AC 220V-240V or AC 100-120V
- 2.Volume:30 Litre
- 3.Power consumption:60W±10%

Outer Size:597*313*358(mm)	Inner Size:410*244*270(mm)
Inner Box Size:608*350*386(mm)	Carton Size:620*365*405(mm)
PACKING:1PC/Inner Box 1PC/CTN	
N.W/G.W(KGS):5.8/7.6	QTY/20"/40"/40*HC(PCS):300/620/700



HEATING 50-65℃
COOLING 5-8℃
TA: 25℃





CBP-21L

- 1.Voltage:DC 12V and AC 220V-240V or AC 100-120V
- 2.Volume:18 Litre
- 3.Power consumption:48W±10%

Inner Box Size:390*245*445(mm)	Carton Size:500*410*460(mm)
PACKING:1PC/Inner Box 2PCS/CTN	
N.W/G.W(KGS):6.5/8.5	QTY/20"/40"/40"HC(PCS):550/1200/1400

12 BOTTLES* 380ml Water
20 CANS* 330ml Cola

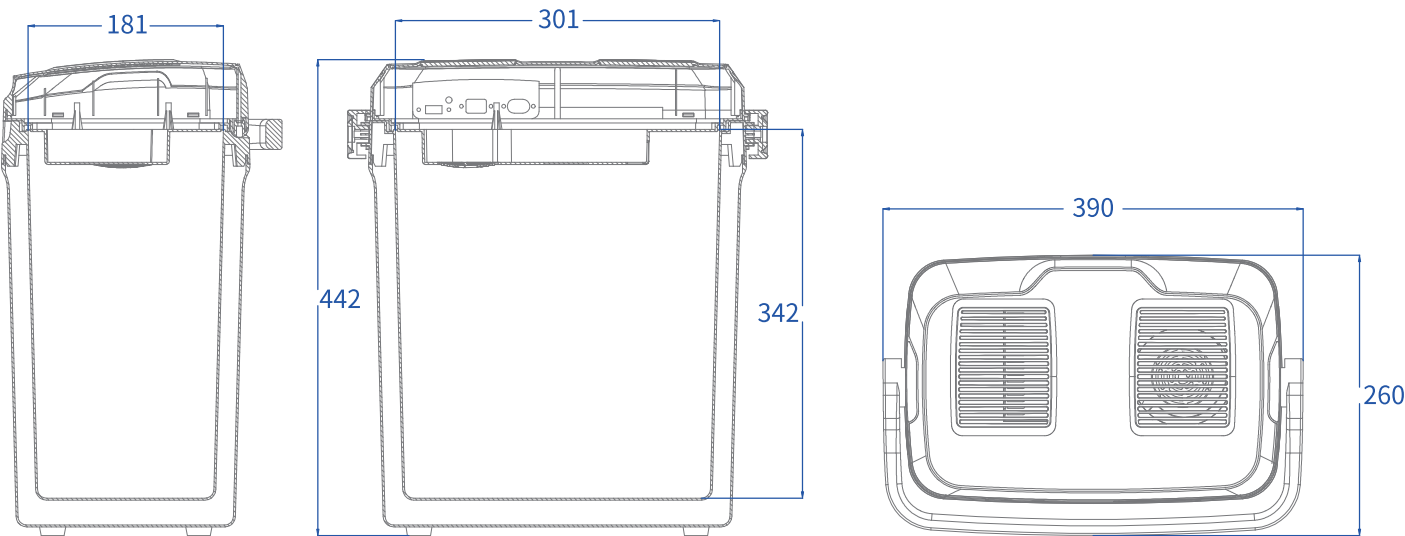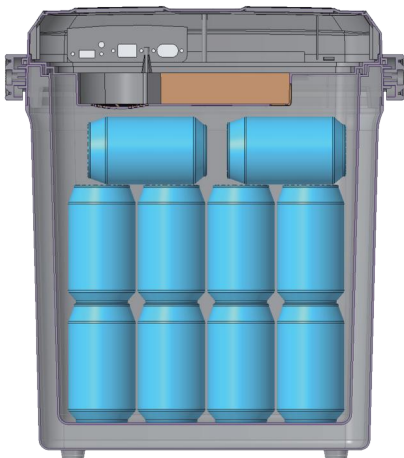

HEATING 50-65℃
COOLING 5-8℃
TA: 25℃






CBP-24L

- 1.Voltage:DC 12V and AC 220V-240V or AC 100-120V
- 2.Volume:24 Litre
- 3.Power consumption:48W±10%

Inner Box Size:405*305*453(mm)	Carton Size:630*420*470(mm)
PACKING:1PC/Inner Box 2PCS/CTN	
N.W/G.W(KGS):8/10	QTY/20"/40"/40"HC(PCS):500/1000/1100

23 BOTTLES* 380ml Water
34 CANS* 330ml Cola

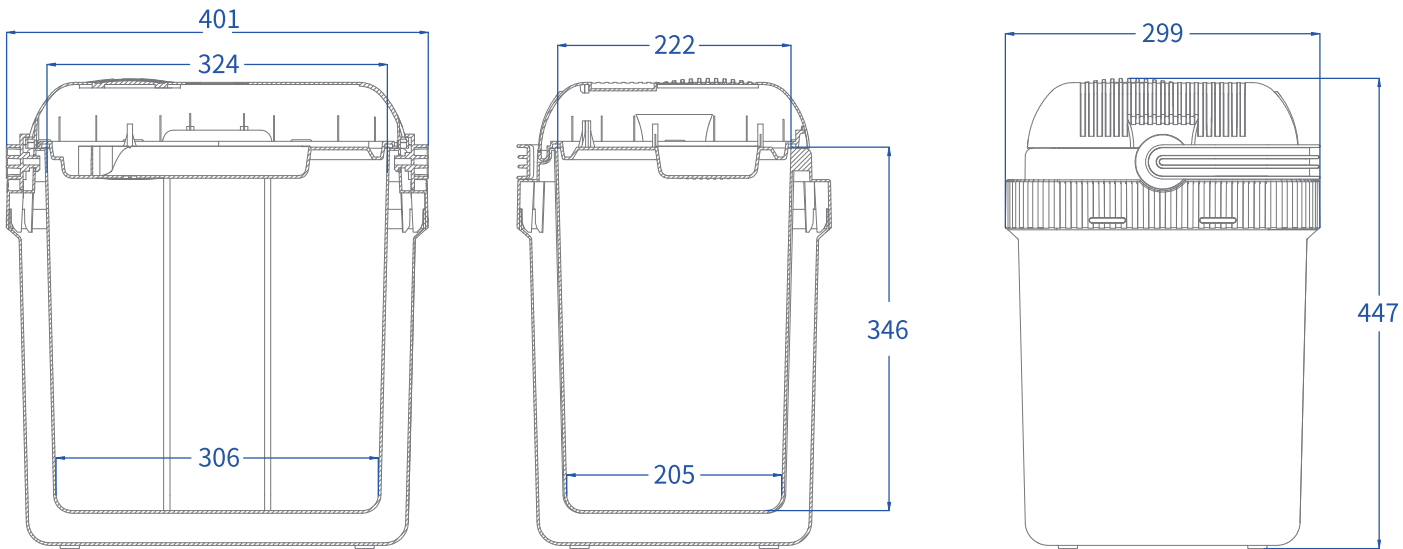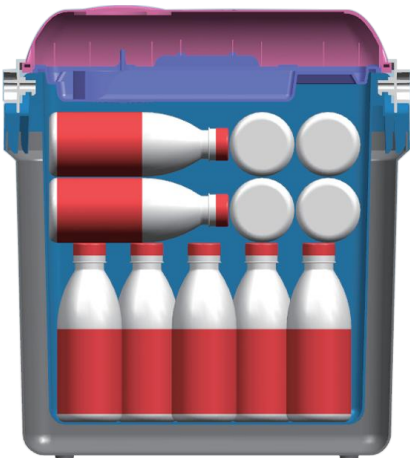



CBP-26L-D

- 1.Voltage:DC 12V and AC 220V-240V or AC 100-120V
- 2.Volume:26 Litre
- 3.Power consumption:48W±10%

Inner Size:300*240*335(mm)	Inner Box Size:410*325*440(mm)
PACKING:1PC/Inner Box 2PCS/CTN	Carton Size:670*425*455(mm)
N.W/G.W(KGS):7.9/10	QTY/20"/40"/40"H(C/PCS):500/950/1050



CBP-26L-E

- 1.Voltage:DC 12V and AC 220V-240V or AC 100-120V
- 2.Volume:26 Litre
- 3.Power consumption:48W±10%

Inner Size:300*240*335(mm)	Inner Box Size:410*325*440(mm)
PACKING:1PC/Inner Box 2PCS/CTN	Carton Size:670*425*455(mm)
N.W/G.W(KGS):7.9/10	QTY/20"/40"/40"H(C/PCS):500/950/1050



CBP-26L
CBP-26L-A()



CBP-26L-B
CBP-26L-C()



CBP-26L-D
CBP-26L-E()



CBP-26L-F
CBP-26L-G()



17 BOTTLES*
380ml Water

30 CANS*
330ml Cola



HEATING
50-65℃
COOLING
5-10℃
TA: 25℃

CBP-29L-D

- 1.Voltage:DC 12V and AC 220V-240V or AC 100-120V
- 2.Volume:29 Litre
- 3.Power consumption:48W±10%

Inner Size:300*240*350(mm)	Inner Box Size:410*325*485(mm)
PACKING:1PC/Inner Box 2PCS/CTN	Carton Size:665*425*500(mm)
N.W/G.W(KGS):8.2/11.5	QTY/20"/40"/40"HC(PCS):400/800/920



CBP-29L-E

- 1.Voltage:DC 12V and AC 220V-240V or AC 100-120V
- 2.Volume:29 Litre
- 3.Power consumption:48W±10%

Inner Size:300*240*350(mm)	Inner Box Size:410*325*485(mm)
PACKING:1PC/Inner Box 2PCS/CTN	Carton Size:665*425*500(mm)
N.W/G.W(KGS):8.2/11.5	QTY/20"/40"/40"HC(PCS):400/800/920



CBP-29L
CBP-29L-A()





CBP-29L-B
CBP-29L-C()



CBP-29L-D
CBP-29L-E()



CBP-29L-F
CBP-29L-G()

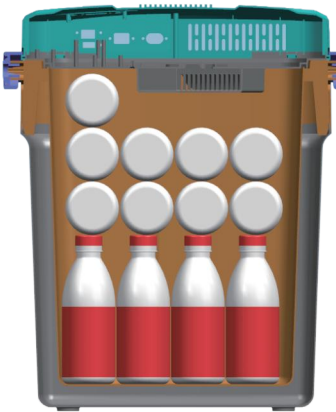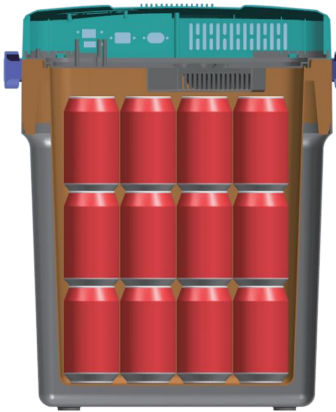

21 BOTTLES*
380ml Water

36 CANS*
330ml Cola


HEATING

50-65℃

COOLING

8-10℃

TA: 25℃

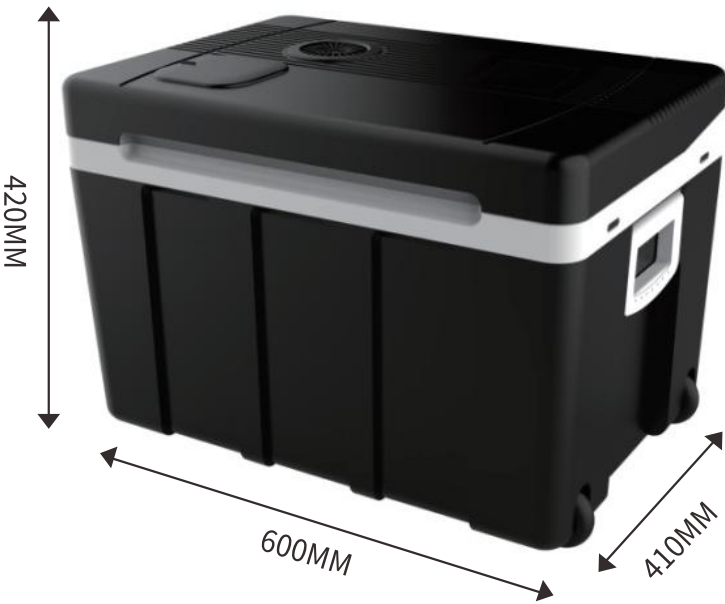

CBP-50L

- 1.Voltage:DC 12V and AC 220V-240V or AC 100-120V
- 2.Volume:50 Litre
- 3.Power consumption:48W±10%
- | | |
|-------------------------------|------------------------------------|
| Inner Size:495*335*330(mm) | Inner Box Size:615*420*435(mm) |
| PACKING:1PC/Inner Box 1PC/CTN | Carton Size:630*435*450(mm) |
| N.W/G.W(KGS):7.5/8.5 | QTY/20"/40"/40*HC(PCS):220/450/550 |



HEATING

50-65℃

COOLING

8-10℃

TA: 25℃



CBP-50L-D(Double Cooling)

- 1.Voltage:DC 12V and AC 220V-240V or AC 100-120V
- 2.Volume:50 Litre
- 3.Power consumption:60W±10%
- | | |
|-------------------------------|------------------------------------|
| Inner Size:303*477*347(mm) | Inner Box Size:635*465*565(mm) |
| PACKING:1PC/Inner Box 1PC/CTN | Carton Size:650*480*580(mm) |
| N.W/G.W(KGS):8.7/9.8 | QTY/20"/40"/40*HC(PCS):150/300/360 |



CBP-50L-E(Double Cooling)

- 1.Voltage:DC 12V and AC 220V-240V or AC 100-120V
- 2.Volume:50 Litre
- 3.Power consumption:60W±10%
- | | |
|-------------------------------|------------------------------------|
| Inner Size:303*477*347(mm) | Inner Box Size:635*465*565(mm) |
| PACKING:1PC/Inner Box 1PC/CTN | Carton Size:650*480*580(mm) |
| N.W/G.W(KGS):8.7/9.8 | QTY/20"/40"/40*HC(PCS):150/300/360 |




NINGBO ICEBERG ELECTRONIC APPLIANCE CO.,LTD.

CERTIFICATE



SCAN ISO9001 ISO45001 ISO14001

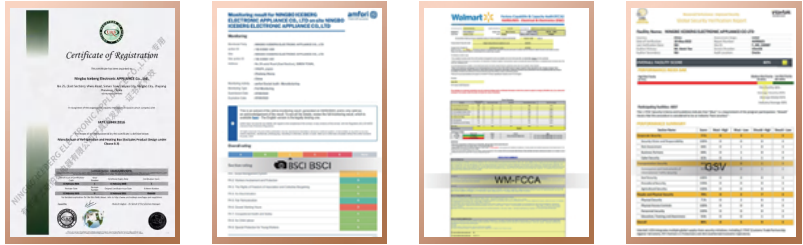

IATF16949 BSCI FCCA GSV

CERTIFICATE OF FACTORY MANAGEMENT SYSTEM




REACH ROHS FDA DOE



ERP LFGB CA65 EPR EPR

CERTIFICATE OF ENERGY AND FOOD SAFETY

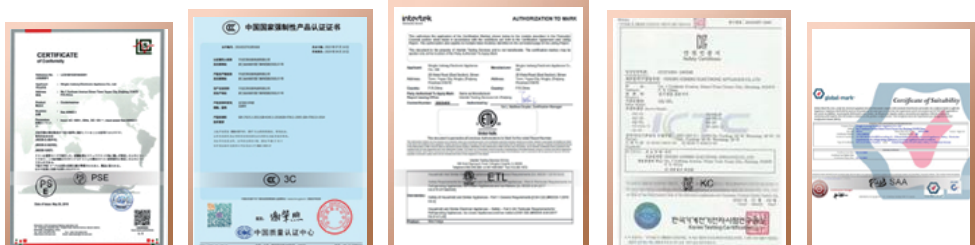

PSE CCC ETL KC SAA



FCC CE-LVD CE-EMC CB UKCA

PRODUCT SAFETY REGULATION CERTIFICATE



PATENT CERTIFICATE