



MORE FUN

IN YOUR LIFE



47 YEARS OF T.E. PRODUCT EXPERIENCE
& SPECIALIZING IN COOLING TECHNOLOGY

EVERCOOL


Ningbo Jiayuan Electronic Co., Ltd.

NO.165, Yingfeng Road, Linshan Town, Yuyao, Ningbo, Zhejiang 315460

Tel : +86 574 62053198

Email : jiayuan@cn-jiayuan.com

Website: www.cn-jiayuan.com www.minifridge.com.cn

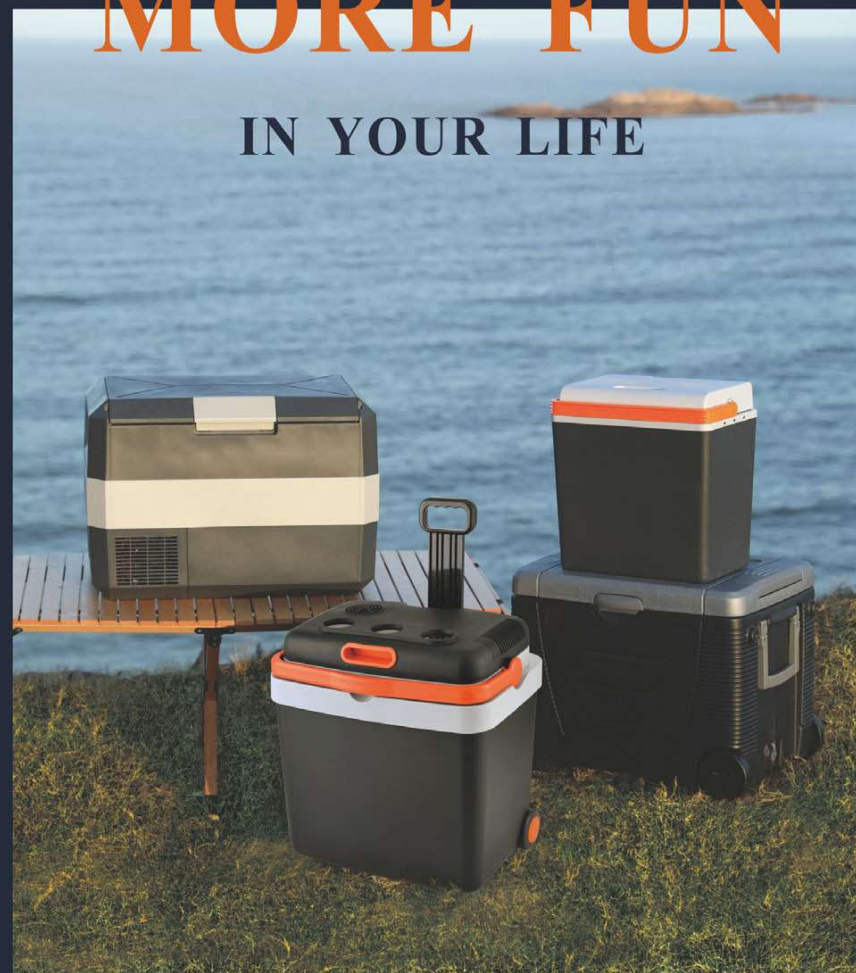

NINGBO JIAYUAN ELECTRONIC CO., LTD.

CONTENTS

YOUR ONE-STOP SHOP AT EVERCOOL



Discontinued classic products



The corporate
history of
EVERCOOL

WELCOME TO JIAYUAN
BRING MORE FUN INTO YOUR LIFE

1978

Established the “EVERCOOL” trademark.

1983

EVERCOOL won certification from international organizations.

1995

EVERCOOL sales exceeded ten million US dollars.
To be the leader in thermoelectric cooler and warmer.

1999

Ningbo Jiayuan Electronic Co., Ltd. was founded.

2004

EVERCOOL and JIAYUAN have become the world's most renowned manufacturers of thermoelectric cooler and warmer.

2011

Ningbo Jiayuan Electronic Co., Ltd. has acquired EVERCOOL.

2014

Created the new production line of DC compressor refrigerator-freezers by adopting the most sophisticated technology in the world.

2018

Cooperated with Italian designers to develop new products.

2020

Cooperated with Taiwan, China and Shanghai famous designers to develop a series of professional mini beauty refrigerator.

2023

Developed ErP Class D products by newly advanced thermoelectric cooling technology.





ECF-25 28L ECF-30 33L

DC COMPRESSOR FRIDGE FREEZER




ECF-25



ECF-30

Design Team



Designed by the team of Italian designer Francesco Costacurta.

Power entry with cord organiser



DC 12/24V inlet for DC cable. In the event that the display's control panel fails to function, a failsafe switch-Emergency switch is provided.

Hidden handle



The concealed handle can conserve space and be conveniently positioned.

Practical storage & easy cleaning



Included is a basket with a removable partition. The flush-mounted evaporator plate and discharge valve make for straightforward cleaning.

Interior multi-point LED light with magnetic switch





When the lid is opened or closed, the LED lights turn on or off.

2 Ways opening (left or right)



Removable lid. Both sides are accessible for opening. Left and right opening options.

MODEL NO.	ECF-25	ECF-30
Max Power	DC12V 3.2A DC24V 1.6A	
Voltage	DC 12/24V with AC adaptor 100-240v	
Temperature display	LED display and control from -22°C to +20°C	
Cooling performance	-18°C to +20°C	
Storage Capacity	28L	33L
Cooling unit	EVERCOOL compressor or SECOP compressor with R1234yf or R134a	
Insulation	CFC & HCFC free PU foam, average 45mm thickness	
N.W./G.W.	11.00KGS/13.00KGS	11.50KGS/13.5KGS
Product Size	600X380X376mm	600X380X426mm
White box	63.8X41.8X44.3CM	63.8X41.8X49.3CM
Master carton	65.5X43.5X46CM	65.5X43.5X51CM
20'GP	200CS	180PCS
40'GP	418PCS	385PCS
40HQ	492PCS	453PCS

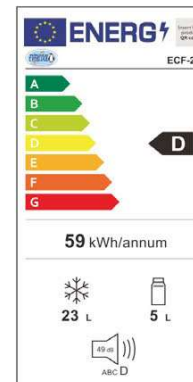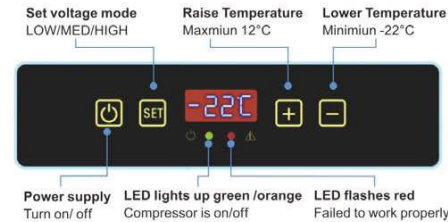

Keep the food fresh for more than 72 hours





ECF-28/35/40/50/60



ECF-28

ECF-35

ECF-40

ECF-50

ECF-60

Rubber LOGO



Rubber LOGO can be customized by independent mold.

2 Ways opening (left or right)



Removable lid. Both sides are accessible for opening in an instant. Left and right opening options.

Power entry with cord organiser



DC 12/24V inlet for DC cable and AC 100-240V for AC cable in the event that the display's control panel fails to function, a fail-safe switch-Emergency switch is provided.

Practical storage & easy cleaning



Included is a basket with a removable partition. The flush-mounted evaporator plate and discharge valve make for straightforward cleaning.

Strong drop down handles



Spring loaded rubber wrapped steel handles with nylon base.

Interior multi-point LED light with magnetic switch




When the lid is opened or closed, the LED lights turn on or off.

MODEL NO.	ECF-28	ECF-35	ECF-40	ECF-50	ECF-60
Storage Capacity	28L	33L	40L	50L	60L
Power consumption	DC 12V 3.2A AC 24V 1.6A	DC 12V 3.8A AC 24V 1.9A	DC 12-24V 5.0-2.5A AC 100-240V 50-60Hz 1.0-0.5A		
Voltage	DC 12/24V+external AC adaptor 100-240V		Build-in DC 12/24V+AC 100-240V		
Cooling performance	-18°C to +20°C		-22°C to +20°C		
Temperature display	LED display and control from -22°C to +20°C				
Cooling unit	EVERCOOL compressor or SECOP compressor with R1234yf or R134a				
Insulation	CFC & HCFC free PU foam, average 45mm thickness				
N.W./G.W.	12.0KGS/15.0KGS	14.0KGS/17.0KGS	20.0KGS/24.0KGS	21.5KGS/25.5KGS	23.0KGS/27.0KGS
Product Size	557*374*367mm	557*374*407mm	713.8*449*426mm	714*452.4*468.5mm	714*453.4*523.5mm
White inner box	623*433*445mm	623*433*485mm	720*482*480mm	720*482*523mm	720*482*575mm
Carton Size	64X45X46.5cm	64X45X50.5cm	73.5X50X50cm	73.5X50X54cm	73.5X50X59.5cm
20' GP	220pcs	200pcs	154pcs	140pcs	128pcs
40' GP	440pcs	400pcs	308pcs	280pcs	256pcs
40HQ	500pcs	460pcs	354pcs	330pcs	300pcs



DC COMPRESSOR FRIDGE FREEZER



-18~-22°C Seafood -15~-18°C Ice Cream -5~-5°C fresh meat 0~10°C cool drink 3~8°C Fruits and vegetables

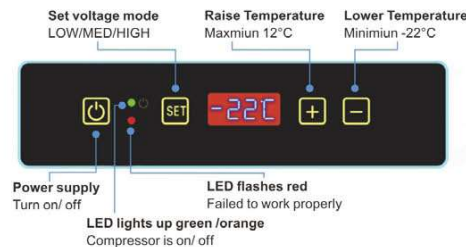

Keep the food fresh for more than 72 hours

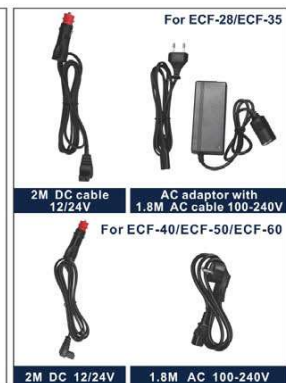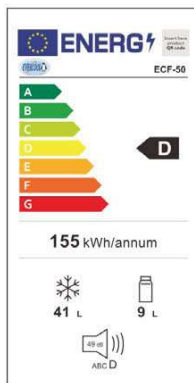



EC-2325-A/C EC-2325-B/D 24L


THERMOELECTRIC COOLER AND WARMER

NEW



EC-2325-A/C

EC-2325-B/D With LED Display

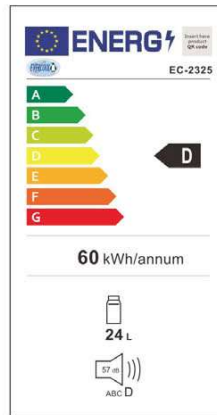

Power consumption

	Cold	AC230 V	DC12V
		55W	45W
	Warm	AC230 V	DC12V
		50W	40W



EC-2325-A



EC-2325-B



EC-2325-C/D



EC-2325-A/C



EC-2325-B/D



AC POWER CORD
100-120V
or 220-240V
1.5M



DC POWER CORD
12V
2M



Specification			
Main Material	PP	Cooling Capacity	max 18℃ below ambient temperature
Insulation	Poly foam Lid and PU foam body	Heating Capacity	50℃ ± 5℃ by set-point thermostat
Product Weight	4.7KGS	Voltage	100-120V AC/12V DC 220-240V AC/12V DC
Features	EC-2325-A:New design, Energy class D with excelent cooling performance. EC-2325-B:With LED display-optional.		
Packaging Information			
1pcs		2pcs	
5ly Gift Box With Shrink Wrapped	W42. 0×D31.0×H40.5CM	3ly Gift Box	W42. 0×D31.0×H40.5CM
		Carton Size	W63.0×D43.5×H42.5CM
Gift Box N.W. / G.W.	4.7/5.5KGS	Carton N.W. / G.W.	9.5/11.5KGS
20GP/ 40GP /40HQ	540/1080/1308PCS	20GP/ 40GP /40HQ	496/1012/1118PCS





EC-2430-A/C EC-2430-B/D 29L


THERMOELECTRIC COOLER AND WARMER

NEW



EC-2430-A/C

EC-2430-B/D With LED Display

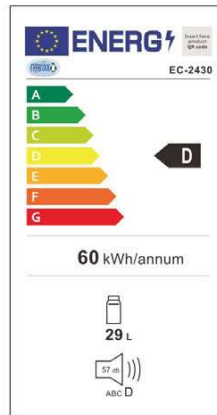

Power consumption

	Cold	AC230 V	DC12V
		55W	45W
	Warm	AC230 V	DC12V
		50W	40W



EC-2430-A



EC-2430-B



EC-2430-C/D



EC-2430-A/C



EC-2430-B/D



AC POWER CORD
100-120V
or 220-240V
1.5M



DC POWER CORD
12V
2M



Specification			
Main Material	PP	Cooling Capacity	max 18℃ below ambient temperature
Insulation	Poly foam Lid and PU foam body	Heating Capacity	50℃ ± 5℃ by set-point thermostat
Product Weight	5.0KGS	Voltage	100-120V AC/12V DC 220-240V AC/12V DC
Features	EC-2430-A:New design, Energy class D with excelent cooling performance. EC-2430-B:With LED display-optional.		
Packaging Information			
1pcs		2pcs	
5ly Gift Box With Shrink Wrapped	W43.8×D30.5×H43CM	3ly Gift Box	W43.8×D30.5×H43CM
		Carton Size	W62×D45.5×H45CM
Gift Box N.W. / G.W.	5.0/5.8KGS	Carton N.W. / G.W.	10.0/12.0KGS
20GP/ 40GP /40HQ	504/1008/1200PCS	20GP/ 40GP /40HQ	456/912/1086PCS



JY-A-8L 8L

THERMOELECTRIC COOLER AND WARMER



Power consumption

	AC230 V	DC12V
Cold	48W	38W
Warm	45W	34W

Specification			
Main Material	PP & Aluminum	Cooling Capacity	18℃ - 20℃ below ambient temperature
Insulation	Poly foam lid and PU foam body	Heating Capacity	55℃ ± 5℃ by set-point thermostat
Product Weight	3.3KGS	Voltage	100-120V AC/12V DC 220-240V AC/12V DC
Features	Modern and exquisite outlook and light weight for easy carrying. Adjustable strap device for tying into car central console. With 2 can holders.		
Packaging Information			
1pcs		3pcs	
5ly Gift Box With Shrink Wrapped	W48×D23.3×H30.9CM	3ly Gift Box	W48×D23.3×H30.9CM
		Carton Size	W72×D49.5×H32.5CM / 3PCS
Gift Box N.W. / G.W.	3.3/3.8KGS	Carton N.W. / G.W.	10.00/11.00KGS
20GP/ 40GP /40HQ	800/1657/1942PCS	20GP/ 40GP /40HQ	768/1590/1854PCS




JY-A-X 16L

THERMOELECTRIC COOLER AND WARMER



Power consumption

	AC230 V	DC12V
Cold	57W	46W
Warm	55W	42W



Specification			
Main Material	PP & Aluminum	Cooling Capacity	18℃ - 20℃ below ambient temperature
Insulation	Poly foam lid and PU foam body	Heating Capacity	55℃ ± 5℃ by set-point thermostat
Product Weight	4.5KGS	Voltage	100-120V AC/12V DC 220-240V AC/12V DC
Features	Simply fix to the front passenger seat or one of the seats in the rear using the vehicle's own seat belt. The lid can be opened in a trice with just one hand.		
Packaging Information			
	1pcs		2pcs
5ly Gift Box With Shrink Wrapped	W58 × D30.8 × H33CM	3ly Gift Box	W58 × D30.8 × H33CM
		Carton Size	W64 × D59 × H35CM / 2PCS
Gift Box N.W. / G.W.	4.5/5KGS	Carton N.W. / G.W.	9/10KGS
20GP/ 40GP /40HQ	474/983/1152PCS	20GP/ 40GP /40HQ	440/900/1050PCS






EC-1820 20L

THERMOELECTRIC COOLER AND WARMER




DC 12V and cooling only



Power consumption

	Cold	AC230 V	DC12V
		55W	45W
	Warm	AC230 V	DC12V
		47W	40W

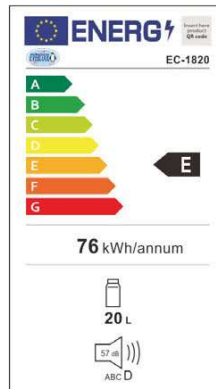

Specification			
Main Material	PP	Cooling Capacity	15℃ ± 3℃ below ambient temperature
Insulation	Poly foam or PU foam	Heating Capacity	50℃ ± 5℃ by set-point thermostat
Product Weight	3.0KGS	Voltage	100-120V AC/12V DC 220-240V AC/12V DC
Features	Light weight for easy carrying. Economical version in high performance at low price.		
Packaging Information			
1pcs		2pcs	
5ly Gift Box With Shrink Wrapped	W39×D25.5×H42CM	3ly Gift Box	W39×D25.5×H42CM
		Carton Size	W52.5×D40.5×H43.5CM
Gift Box N.W. / G.W.	3.0/3.7KGS	Carton N.W. / G.W.	6.0/7.7KGS
20GP/ 40GP /40HQ	740/1480/1670PCS	20GP/ 40GP /40HQ	688/1376/1532PCS




EC-1930 30L

THERMOELECTRIC COOLER AND WARMER




DC 12V and cooling only




Power consumption

	Cold	AC230 V	DC12V
		61W	48W
	Warm	AC230 V	DC12V
		53W	41W

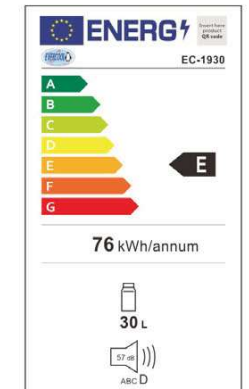


Specification			
Main Material	PP	Cooling Capacity	15℃ ± 3℃ below ambient temperature
Insulation	Poly foam or PU foam	Heating Capacity	50℃ ± 5℃ by set-point thermostat
Product Weight	5.0KGS	Voltage	100-120V AC/12V DC 220-240V AC/12V DC
Features	Economical and simple version. With large size, strong handle for carry, light weight and portable.		
Packaging Information			
1pcs		2pcs	
5ly Gift Box With Shrink Wrapped	W43.3×D29.8×H42CM	3ly Gift Box	W43.3 ×D29.8×H42CM
		Carton Size	W61.5×D45CM×H44CM
Gift Box N.W. / G.W.	5.0/5.8KGS	Carton N.W. / G.W.	10.0/12.0KGS
20GP/ 40GP /40HQ	520/1040/1250PCS	20GP/ 40GP /40HQ	476/964/1122PCS

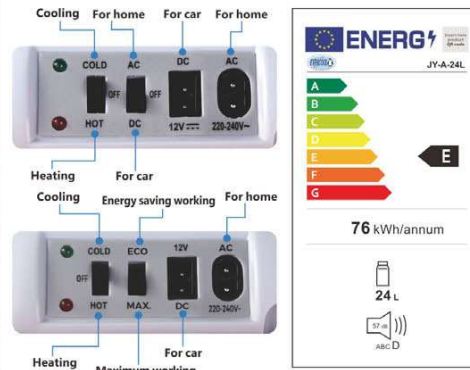


**JY-A-24L 24L****THERMOELECTRIC COOLER
AND WARMER****WITH TWIN-TOP LID
(OPTIONAL)**

Specification			
Main Material	PP	Cooling Capacity	18℃ ± 3℃ below ambient temperature
Insulation	Poly foam or PU foam	Heating Capacity	50℃ ± 5℃ by set-point thermostat
Product Weight	4.5KGS	Voltage	100-120V AC/12V DC 220-240V AC/12V DC
Features	The traditional appearance, simple and generous structures and cost-effective, to be the first choice of the affordable cooler.		
Packaging Information			
1pcs		2pcs	
5ly Gift Box With Shrink Wrapped	W40.2×D30.6×H44.5CM	3ly Gift Box	W40.2×D30.6×H44.5CM
		Carton Size	W62.5×D41.7×H46CM / 2PCS
Gift Box N.W. / G.W.	4.5/5.3KGS	Carton N.W. / G.W.	9.0/11.0KGS
20GP/ 40GP /40HQ	530/1060PCS/1290PCS	20GP/ 40GP /40HQ	480/1000/1140PCS

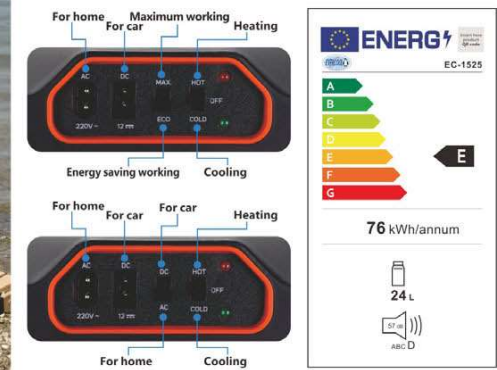**EC-1525 24L****THERMOELECTRIC COOLER
AND WARMER****WITH BAGS
(OPTIONAL)**


Specification			
Main Material	PP	Cooling Capacity	18℃ - 20℃ below ambient temperature
Insulation	PU(Polyurethane) foam	Heating Capacity	50℃ ± 5℃ by set-point thermostat
Product Weight	4.5KGS	Voltage	100-120V AC/12V DC 220-240V AC/12V DC
Features	Stylish outlook and good performance. Big handle for easy carrying. To be one of your best choice.		
Packaging Information			
1pcs		2pcs	
5ly Gift Box With Shrink Wrapped	W40.3×D30.8×H44.8CM	3ly Gift Box	W40.3×D30.8×H44.8CM
		Carton Size	W63×D42×H46.5CM
Gift Box N.W. / G.W.	4.5/5.0KGS	Carton N.W. / G.W.	9.0/11.0KGS
20GP/ 40GP /40HQ	500/1000/1240PCS	20GP/ 40GP /40HQ	460/960/1120PCS

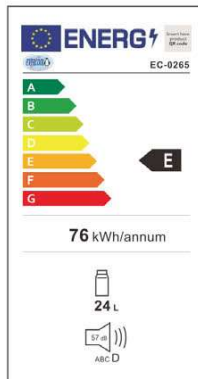

**EC-0265 24L****THERMOELECTRIC COOLER AND WARMER****Power consumption**

	AC230 V	DC12V
Cold	53W	48W
Warm	48W	45W

Specification			
Main Material	PP	Cooling Capacity	18°C - 20°C below ambient temperature
Insulation	PU(Polyurethane) foam	Heating Capacity	50°C ± 5°C by set-point thermostat
Product Weight	4.5KGS	Voltage	100-120V AC/12V DC 220-240V AC/12V DC
Features	Modern design lid, never outdated, it's excellent function and novel appearance to let you fall in love at first sight.		
Packaging Information			
1pcs		2pcs	
5ly Gift Box With Shrink Wrapped	W40.2×D30.6×H44.5CM	3ly Gift Box	W40.2×D30.6×H44.5CM
		Carton Size	W62.5×D41.7×H46CM / 2PCS
Gift Box N.W. / G.W.	4.5/5.3KGS	Carton N.W. / G.W.	9.0/11.0KGS
20GP/ 40GP /40HQ	530/1060/1290PCS	20GP/ 40GP /40HQ	480/1000/1140PCS

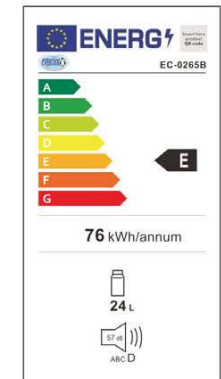**EC-0265B 24L****THERMOELECTRIC COOLER AND WARMER****Power consumption**


	AC230 V	DC12V
Cold	60W	45W
Warm	55W	40W

Specification			
Main Material	PP	Cooling Capacity	18℃ - 20℃ below ambient temperature
Insulation	PU(Polyurethane) foam	Heating Capacity	50℃ ± 5℃ by set-point thermostat
Product Weight	4.5KGS	Voltage	100-120V AC/12V DC 220-240V AC/12V DC
Features	Modern design lid, never outdated, it's excellent function and novel appearance to let you fall in love at first sight.		
Packaging Information			
1pcs		2pcs	
5ly Gift Box With Shrink Wrapped	W40.2×D30.6×H44.5CM	3ly Gift Box	W40.2×D30.6×H44.5CM
		Carton Size	W62.5×D41.7×H46CM / 2PCS
Gift Box N.W. / G.W.	4.5/5.3KGS	Carton N.W. / G.W.	9.0/11.0KGS
20GP/ 40GP /40HQ	530/1060/1290PCS	20GP/ 40GP /40HQ	480/1000/1140PCS



**EC-0728 28L****THERMOELECTRIC COOLER AND WARMER****WITH FRONT BAG (OPTIONAL)**Divider for
Separating
the stuffWith a drink
flask
Fill the water
flask with
water and
freeze it in
the home
fridge
overnight


For car Cooling Heating For home

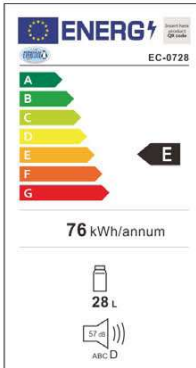**Power consumption**


Cold	AC230 V	DC12V
	62W	53W
Warm	AC230 V	DC12V
	55W	48W




28 L

**JY-B-33L/JY-C-33L 33L****THERMOELECTRIC COOLER AND WARMER****JY-B-33L****With trolley****WITH TWIN-TOP LID WITH FRONT BAG (OPTIONAL)****Non-electric function**

Heating Maximum working



Heating For car

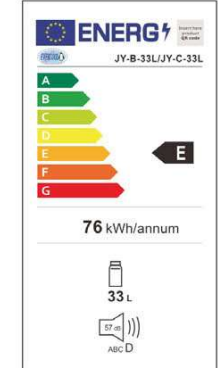**Power consumption**

Cold	AC230 V	DC12V
	60W	45W
Warm	AC230 V	DC12V
	45W	42W



33 L



Specification			
Main Material	PP	Cooling Capacity	18°C - 20°C below ambient temperature
Insulation	PU(Polyurethane) foam	Heating Capacity	50°C ± 5°C by set-point thermostat
Product Weight	6.1KGS	Voltage	100-120V AC/12V DC 220-240V AC/12V DC
Features	With a big puller and wheels for easy rolling. With a drink flask/divider. Fill the drink flask with water and freeze it in the home fridge overnight, which can be used as icepack for fast cooling effect.		
Packaging Information			
1pcs		1pcs	
5ly Gift Box With Shrink Wrapped	W45.0×D35.5×H48.0CM	3ly Gift Box	W45.0×D35.5×H48.0CM
		Carton Size	W46.5×D37×H50CM
Gift Box N.W. / G.W.	6.1/7.1KGS	Carton N.W. / G.W.	6.1/7.1KGS
20GP/ 40GP /40HQ	370/795/910PCS	20GP/ 40GP /40HQ	337/680/805PCS

Specification			
Main Material	PP	Cooling Capacity	18℃ ± 3℃ below ambient temperature
Insulation	PU(Polyurethane) foam	Heating Capacity	50℃ ± 5℃ by set-point thermostat
Product Weight	6.5KGS	Voltage	100-120V AC/12V DC 220-240V AC/12V DC
Features	With a big puller and wheels for easy rolling. Detachable Grid Divider to use the space inside reasonable. Big volume, also big handle for easy carrying and with a strong extension puller and wheels for rolling (Option).		
Packaging Information			
1pcs		1pcs	
5ly Gift Box With Shrink Wrapped	W46. 0×D35.5X×H49.7CM	3ly Gift Box	W46. 0×D35.5X×H49.7CM
		Carton Size	W47.5×D37×H51.5CM
Gift Box N.W. / G.W.	6.5/7.5KGS	Carton N.W. / G.W.	6.5/7.5KGS
20GP/ 40GP /40HQ	350/720/850PCS	20GP/ 40GP /40HQ	320/650/760PCS




video




video

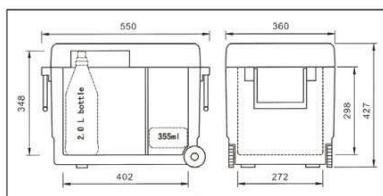


**EC-985D 33L****THERMOELECTRIC COOLER
AND WARMER**

	355ML	500ML	1.5L	2L
	X54	X22	X9	X6
Power consumption				
Cold	AC230 V	DC12V		
	65W	48W		
Warm	AC230 V	DC12V		
	56W	44W		


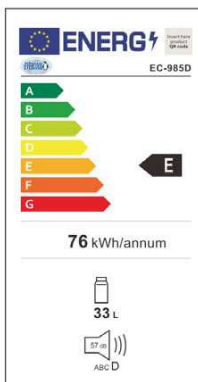


Specification			
Main Material	ABS	Cooling Capacity	15°C ± 3°C below ambient temperature
Insulation	PU(Polyurethane) foam	Heating Capacity	50°C ± 5°C by set-point thermostat
Product Weight	8.7KG	Voltage	100-120V AC/12V DC 220-240V AC/12V DC
Features	LED temperature display,cover in cover for saving power consumption. Multi-functional item for family travelling with the elegant box rolls effortlessly on its two sturdy wheels		
Packaging Information			
5ly Gift Box With Shrink Wrapped	W56×D39×H46.5CM		
Gift Box N.W. / G.W.	8.7/10.0KGS		
20GP/ 40GP /40HQ	290/600/687PCS		

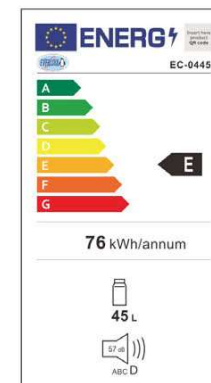**EC-0445 45L****THERMOELECTRIC COOLER
AND WARMER**

Specification			
Main Material	HDPE & PP	Cooling Capacity	15℃ ± 3℃ below ambient temperature
Insulation	PU(Polyurethane) foam	Heating Capacity	50℃ ± 5℃ by set-point thermostat
Product Weight	9.0KG	Voltage	100-120V AC/12V DC 220-240V AC/12V DC
Features	Large capacity is the best choice of the family travel. The puller and two big wheels for convenient carrying.		
Packaging Information			
5ly Gift Box With Shrink Wrapped	W60×D44×H47CM		
Gift Box N.W. / G.W.	9.0/10.5KGS		
20GP/ 40GP /40HQ	230/485/525PCS		



**EC-0326A 26L****THERMOELECTRIC COOLER
AND WARMER****Power consumption**

	AC230 V	DC12V
Cold	62W	46W
Warm	50W	42W

Specification			
Main Material	PP	Cooling Capacity	18℃ -20℃ below ambient temperature
Insulation	PU foam	Heating Capacity	50℃ ± 5℃ by set-point thermostat
Product Weight	5.8KGS	Voltage	100-120V AC/12V DC 220-240V AC/12V DC
Features	The modern and elegant design. Big capacity the cover lid with power cord compartment, and pull Bach grip for easy turn on. The bottom case with large handle for carrying.		
Packaging Information			
1pcs		1pcs	
5ly Gift Box With Shrink Wrapped	W41.3×D33.2×H45 CM / 1PCS	3ly Gift Box	W41.3×D33.2×H45 CM / 1PCS
Gift Box N.W. / G.W.	5.8/7.1KGS	Carton Size	W41.3×D33.2×H45 CM / 1PCS
20GP/ 40GP /40HQ	460/960/1120PCS	Carton N.W. / G.W.	5.8/7.1KGS
		20GP/ 40GP /40HQ	460/960/1120PCS

**JY-A-18L-1
JY-A-18L-2 18L****THERMOELECTRIC COOLER
AND WARMER****JY-A-18L-1** With temp. display**JY-A-18L-2** Without temp. display

Specification			
Main Material	ABS & Aluminum	Cooling Capacity	25°C ± 3°C below ambient temperature
Insulation	Poly foam and PU foam	Heating Capacity	55°C ± 5°C by set-point thermostat
Product Weight	6KGS	Voltage	100-120V AC/12V DC 220-240V AC/12V DC
Features	Traditional portable model, double cooling system, with super cooling function. Let you enjoy the well-content cool world quickly in the hot summer.		
Packaging Information			
1pcs		2pcs	
5ly Gift Box With Shrink Wrapped	W48.6 × D35 × H39CM	3ly Gift Box	W48.6 × D35 × H39CM
		Carton Size	W71.5 × D50 × H40.5CM / 2PCS
Gift Box N.W. / G.W.	6/6.5KGS	12/13KGS	
20GP/ 40GP /40HQ	424/878/1030PCS	20GP/ 40GP /40HQ	400/794/952PCS





JY-A-4L 4L

THERMOELECTRIC COOLER AND WARMER



Power consumption

	AC230 V	DC12V
Cold	44W	36W
Warm	40W	32W



Specification			
Main Material	ABS & Aluminum	Cooling Capacity	18°C - 20°C below ambient temperature
Insulation	Poly foam	Heating Capacity	55°C ± 5°C by set-point thermostat
Product Weight	2.2KGS	Voltage	100-120V AC/12V DC 220-240V AC/12V DC
Features	Retro design, little and dainty appearance, and light weight. A hole handle on top, easy to carry.		
Packaging Information			
1pcs (For online retail)		4pcs	
Carton size	W28.5 × D22 × H32 CM	3ly Gift Box	W27.6 × D21× H30.8 CM
		Carton Size	W57.2 × D44 × H32.5 CM
Gift Box N.W. / G.W.	2.2/3KGS	Carton N.W. / G.W.	10.5/11.5KGS
20GP/ 40GP /40HQ	1479/2958/3500PCS	20GP/ 40GP /40HQ	1420/2950/3318PCS



JY-B-4L JY-B-4L-1 4L


THERMOELECTRIC COOLER AND WARMER



JY-B-4L



JY-B-4L-1



Power consumption

	AC230 V	DC12V
Cold	42W	36W
Warm	38W	32W


Specification			
Main Material	PP & Aluminum	Cooling Capacity	18°C - 20°C below ambient temperature
Insulation	Poly foam	Heating Capacity	55°C ± 5°C by set-point thermostat
Product Weight	1.5KGS	Voltage	100-120V AC/12V DC 220-240V AC/12V DC
Features	Small and portable. Modern and exquisite outlook. Can be put in any place you need it.		
Packaging Information			
1pcs (For online retail)		4pcs	
Carton size	JY-B-4L:W28 × D22.5 × H30.5CM	3ly Gift Box	JY-B-4L:W27.6 × D21.8 × H29.8CM
	JY-B-4L-1: W28.3 × D22.5 × H30.5CM	Carton Size	JY-B-4L:W57.5 × D45.5 × H31.5CM JY-B-4L-1: W58 × D45.5 × H31.5CM
Gift Box N.W. / G.W.	1.5/1.8KGS	Carton N.W. / G.W.	6.0/8.0KGS
20GP/ 40GP /40HQ	1515/3030/3679PCS	20GP/ 40GP /40HQ	1432/2864/3412PCS





JY-C-4L **4L**

**THERMOELECTRIC COOLER
AND WARMER**

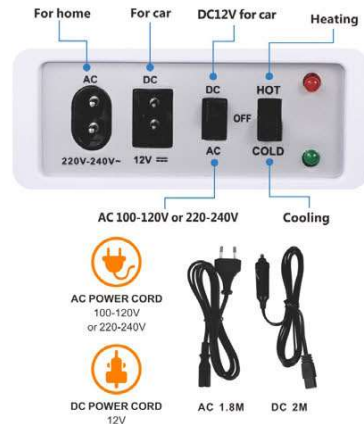

Glass Door



◆ **Power consumption**

355ML X06	Cold	AC230 V	DC12V
		42W	36W
	Warm	AC230 V	DC12V
		38W	32W



DIY Writing Put Favorite labels Scratch Resistant Easy to wipe

Specification			
Main Material	PP & Aluminum	Cooling Capacity	18℃ - 20℃ below ambient temperature
Insulation	Poly foam	Heating Capacity	55℃ ± 5℃ by set-point thermostat
Product Weight	2.0KGS	Voltage	100-120V AC/12V DC 220-240V AC/12V DC
Features	Small and portable. With the galss door. Elegant design and high performance.		
Packaging Information			
1pcs (For online retail)		4pcs	
Carton size	W28.5 × D22.5 × H30.5 CM	3ly Gift Box	W28.2 × D21.8 × H29.8CM
		Carton Size	W58 × D45.5 × H31.5CM
Gift Box N.W. / G.W.	2.0/2.4KGS	Carton N.W. / G.W.	8.0/10.0KGS
20GP/ 40GP /40HQ	1488/2976/3615PCS	20GP/ 40GP /40HQ	1408/2816/3356PCS



JY-D-4L **4L**

**THERMOELECTRIC COOLER
AND WARMER**

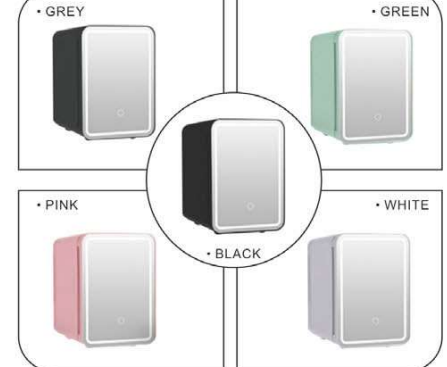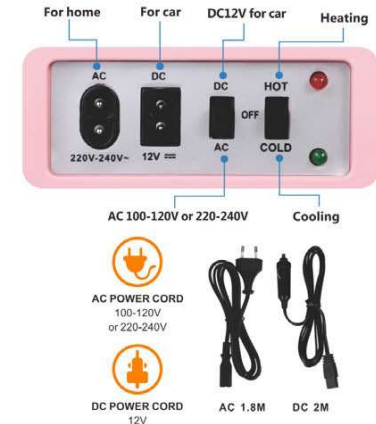

◆ **Power consumption**

355ML X06	Cold	AC230 V	DC12V
		42W	36W
	Warm	AC230 V	DC12V
		38W	32W

Specification			
Main Material	PP & Aluminum	Cooling Capacity	18°C - 20°C below ambient temperature
Insulation	Poly foam	Heating Capacity	55°C ± 5°C by set-point thermostat
Product Weight	2.0KGS	Voltage	100-120V AC/12V DC 220-240V AC/12V DC
Features	Innovative design. With mirror and LED light. Attractive outlook appeals to a wide range of consumers.		
Packaging Information			
1pcs (For online retail)		4pcs	
Carton size	W28.5 × D22.5 × H30.5 CM	3ly Gift Box	W28.2 × D21.8 × H29.8CM
		Carton Size	W58 × D45.5 × H31.5CM
Gift Box N.W. / G.W.	2.0/2.4KGS	Carton N.W. / G.W.	8.0/10.0KGS
20GP/ 40GP /40HQ	1488/2976/3615PCS	20GP/ 40GP /40HQ	1408/2816/3356PCS







JY-D-4L-1 4L

THERMOELECTRIC COOLER AND WARMER

NEW



- The magic mirror with Infinite light.
- To be used as mirror when the infinite light off.
- To create a good atmosphere when infinite light on.



Power consumption


	AC230 V	DC12V
Cold	42W	36W
Warm	AC230 V	DC12V
	38W	32W

Specification			
Main Material	PP & Aluminum	Cooling Capacity	18℃ - 20℃ below ambient temperature
Insulation	Poly foam	Heating Capacity	55℃ ± 5℃ by set-point thermostat
Product Weight	2.0KGS	Voltage	100-120V AC/12V DC 220-240V AC/12V DC
Features	The magic mirror with Infinite light. To be used as mirror when the infinite light off. To create a good atmosphere when infinite light on.		
Packaging Information			
1pcs (For online retail)		4pcs	
Carton size	W29 × D22.5 × H30.5 CM	3ly Gift Box	W28.7 × D21.8 × H29.8CM
		Carton Size	W59 × D45.5 × H31.5CM
Gift Box N.W. / G.W.	2.0/2.4KGS	Carton N.W. / G.W.	8.0/10.0KGS
20GP/ 40GP /40HQ	1450/2960/3460PCS	20GP/ 40GP /40HQ	1360/2780/3250PCS



JY-A-5L 5L

THERMOELECTRIC COOLER AND WARMER



Power consumption

	AC230 V	DC12V
Cold	60W	48W
Warm	AC230 V	DC12V
	50W	40W


Specification			
Main Material	ABS and Aluminum	Cooling Capacity	18℃ - 20℃ below ambient temperature
Insulation	Poly foam	Heating Capacity	55℃ ± 5℃ by set-point thermostat
Product Weight	2.7KGS	Voltage	100-120V AC/12V DC 220-240V AC/12V DC
Features	The front door is installed with two parts. The upper part is Wavy desgin, it can be in silver spraing or chromium decorated		
Packaging Information			
1pcs (For online retail)		4pcs	
Carton size	W28.9 × D22.2 × H32.2 CM	3ly Gift Box	W 28.9 × D22.2 × H32.2 CM
Gift Box N.W. / G.W.	2.7/3.3KGS	Carton Size	W61 × D45.5 × H34 CM
20GP/ 40GP /40HQ	1398/2796/3339PCS	Carton N.W. / G.W.	11.0/12.0KGS
		20GP/ 40GP /40HQ	1228/2500/2900PCS





JY-A-6L 6L

THERMOELECTRIC COOLER AND WARMER



Power consumption

	AC230 V	DC12V
Cold	50W	42W
Warm	45W	38W

Specification

Main Material	ABS and Aluminum	Cooling Capacity	18°C - 20°C below ambient temperature
Insulation	Poly foam lid & PU foam body	Heating Capacity	55°C ± 5°C by set-point thermostat
Product Weight	3.3KGS	Voltage	100-120V AC/12V DC 220-240V AC/12V DC
Features	Retro design. With wavy design front door. A handle on top. easy to carry.		


Packaging Information

1pcs (For online retail)		4pcs	
Carton size	W30.5 × D23.5 × H35.5 CM	3ly Gift Box	W30.3 × D23.7 × H35 CM
Gift Box N.W. / G.W.	3.3/3.8KGS	Carton Size	W62.5 × D49 × H36.5 CM
20GP/ 40GP /40HQ	1125/2250/2711PCS	Carton N.W. / G.W.	13.2/15.2KGS
		20GP/ 40GP /40HQ	1068/2180/2548PCS



JY-F-6L 6L

THERMOELECTRIC COOLER AND WARMER

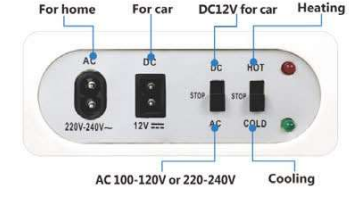

Power consumption

	AC230 V	DC12V
Cold	60W	42W
Warm	55W	38W

Specification

Main Material	ABS and Aluminum	Cooling Capacity	18°C - 20°C below ambient temperature
Insulation	Poly foam lid & PU foam body	Heating Capacity	55°C ± 5°C by set-point thermostat
Product Weight	2.8KGS	Voltage	100-120V AC/12V DC 220-240V AC/12V DC
Features	Keep 8 cans or 4 bottles with 2 shelves and a side basket.		


Packaging Information

1pcs (For online retail)		4pcs	
Carton size	W29.5 × D25 × H36.5 CM	3ly Gift Box	W29 × D24.5 × H35.8 CM
Gift Box N.W. / G.W.	2.8/3.5KGS	Carton Size	W60 × D51 × H38 CM
20GP/ 40GP /40HQ	1070/2180/2550PCS	Carton N.W. / G.W.	11.2/13.2KGS
		20GP/ 40GP /40HQ	992/2020/2360PCS




**JY-B-6L JY-C-6L****6L****THERMOELECTRIC COOLER
AND WARMER****Power consumption**

	Cold	AC230 V	DC12V
355ML X08	60W	42W	
500ML X04	55W	38W	

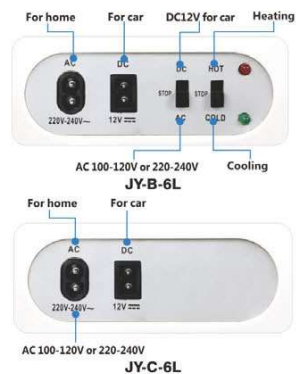**JY-D-6L JY-E-6L****6L****THERMOELECTRIC COOLER
AND WARMER****Power consumption**

	Cold	AC230 V	DC12V
355ML X08	60W	42W	
500ML X04	55W	38W	

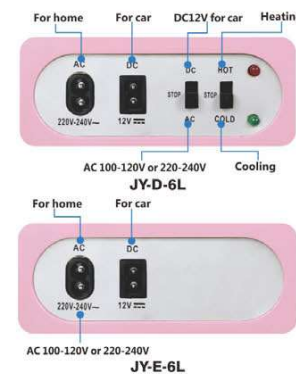

Specification			
Main Material	ABS and Aluminum	Cooling Capacity	18°C - 20°C below ambient temperature
Insulation	Poly foam lid & PU foam body	Heating Capacity	55°C ± 5°C by set-point thermostat
Product Weight	3.3KGS	Voltage	100-120V AC/12V DC 220-240V AC/12V DC
Features	Keep 8 cans or 4 bottles with 2 shelves and a side basket. JY-B-6L: with normal glass door. JY-C-6L: with glass door and LED digital display.		
Packaging Information			
1pcs (For online retail)		4pcs	
Carton size	W30.5 × D24 × H36.5 CM	3ly Gift Box	W30 × D24.5 × H35.8 CM
		Carton Size	W62 × D51 × H38 CM
Gift Box N.W. / G.W.	3.3/4.0KGS	Carton N.W. / G.W.	13.2/15.2KGS
20GP/ 40GP /40HQ	1020/2118/2484PCS	20GP/ 40GP /40HQ	960/1960/2292PCS

Specification			
Main Material	ABS and Aluminum	Cooling Capacity	18℃ - 20℃ below ambient temperature
Insulation	Poly foam lid & PU foam body	Heating Capacity	55℃ ± 5℃ by set-point thermostat
Product Weight	3.3KGS	Voltage	100-120V AC/12V DC 220-240V AC/12V DC
Features	Keep 8 cans or 4 bottles with 2 shelves and a side basket. JY-D-6L: with mirror and LED light, JY-E-6L: with mirror and LED light and LED temperature display.		
Packaging Information			
1pcs (For online retail)		4pcs	
Carton size	W30.5 × D24 × H36.5 CM	3ly Gift Box	W30 × D24.5 × H35.8 CM
		Carton Size	W62 × D51 × H38 CM
Gift Box N.W. / G.W.	3.3/4.0KGS	Carton N.W. / G.W.	13.2/15.2KGS
20GP/ 40GP /40HQ	1020/2118/2484PCS	20GP/ 40GP /40HQ	960/1960/2292PCS







JY-A-10L JY-AS-10L

10L

THERMOELECTRIC COOLER
AND WARMER

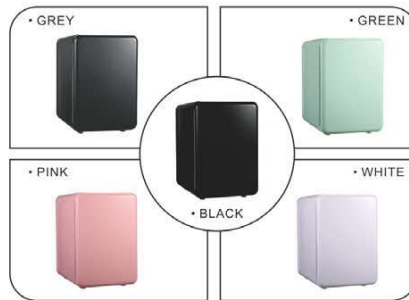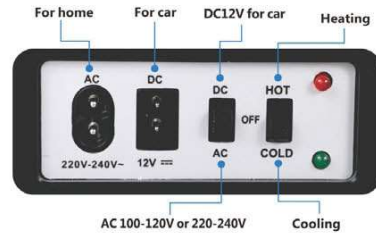

◆ Power consumption

JY-A-10L	
	DC12V
Cold	52W
Warm	45W

◆ Power consumption

JY-AS-10L	
	DC12V
Cold	75W
Warm	60W


		Specification	
Main Material	ABS & Aluminum	Cooling Capacity	JY-A-10L:18℃ - 20℃ below ambient temperature JY-AS-10L:23℃ - 28℃ below ambient temperature
Insulation	Poly foam lid/PU foam body	Heating Capacity	55℃ ± 5℃ by set-point thermostat
Product Weight	JY-A-10L:3.0KGS JY-AS-10L:4.5KGS	Voltage	100-120V AC/12V DC 220-240V AC/12V DC
Features	Attractive outlook and practical function. With two movable shelves. Can store everything you want. JY-A-10L: single cooling system JY-AS-10L: double cooling system		
Packaging Information			
1pcs (For online retail)		2pcs	
Carton size	W35.5 × D27.5 × H37.8 CM	3ly Gift Box	W35.0 × D27.0 × H37.2CM
		Carton Size	W55.5 × D37 × H39CM
Gift Box N.W. / G.W.	JY-A-10L: 3.0/3.4KGS JY-AS-10L: 4.5/5.0KGS	Carton N.W. / G.W.	JY-A-10L: 6.0/8.0KGS JY-AS-10L: 9.0/11.0KGS
20GP/ 40GP/ 40HQ	790/1636/1938PCS	20GP/ 40GP/ 40HQ	726/1412/1730PCS



JY-B-10L JY-BS-10L

10L

THERMOELECTRIC COOLER
AND WARMER

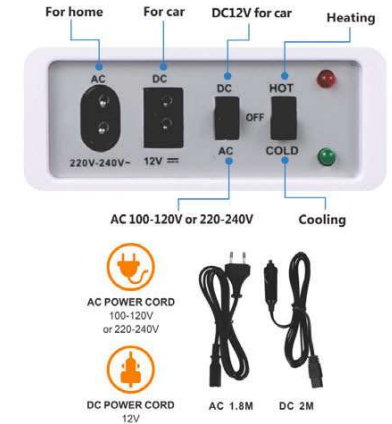

Glass Door



◆ Power consumption

JY-B-10L	
	DC12V
Cold	52W
Warm	45W

◆ Power consumption

JY-BS-10L	
	DC12V
Cold	75W
Warm	60W

		Specification	
Main Material	ABS & Aluminum	Cooling Capacity	JY-B-10L:18℃ - 20℃ below ambient temperature JY-BS-10L:23℃ - 28℃ below ambient temperature
Insulation	Poly foam lid/PU foam body	Heating Capacity	55℃ ± 5℃ by set-point thermostat
Product Weight	JY-B-10L:3.6KGS JY-BS-10L:5.0KGS	Voltage	100-120V AC/12V DC 220-240V AC/12V DC
Features	With the glass door and larger capacity than JY-C-4L. The glass door also can be the white board. Suitable for car, room, office and anywhere. JY-B-10L: single cooling system JY-BS-10L: double cooling system		
Packaging Information			
1pcs (For online retail)		2pcs	
Carton size	W36 × D27.5 × H37.8CM	3ly Gift Box	W35.5 × D27 × H37.2CM
		Carton Size	W55.5 × D37.5 × H39CM
Gift Box N.W. / G.W.	JY-B-10L: 3.6/4.2KGS JY-BS-10L: 5.0/5.5KGS	Carton N.W. / G.W.	JY-B-10L: 7.2/9.2KGS JY-BS-10L: 10.0/12.0KGS
20GP/ 40GP /40HQ	774/1576/1843PCS	20GP/ 40GP /40HQ	716/1432/1706PCS





JY-C-10L JY-CS-10L

10L

THERMOELECTRIC COOLER
AND WARMER



For home For car



AC 100-120V or 220-240V



Intelligent LED Display on Glass Door



DIY Writing Put Favorite labels Scratch Resistant Easy to wipe

Power consumption JY-C-10L

	AC230 V	DC12V
Cold	52W	40W
Warm	45W	36W

Power consumption JY-CS-10L

	AC230 V	DC12V
Cold	75W	60W
Warm	60W	50W



Specification			
Main Material	ABS & Aluminum	Cooling Capacity	JY-C-10L:18℃ - 20℃ below ambient temperature JY-CS-10L:23℃ - 28℃ below ambient temperature
Insulation	Poly foam lid/PU foam body	Heating Capacity	55℃ ± 5℃ by set-point thermostat
Product Weight	JY-C-10L:3.6KGS JY-CS-10L:5.0KGS	Voltage	100-120V AC/12V DC 220-240V AC/12V DC
Features	With the glass door and with the LED digital display. The inside temperature can be read at glance. And can set the temperature. JY-C-10L: single cooling system JY-CS-10L: double cooling system		
Packaging Information			
1pcs (For online retail)		2pcs	
Carton size	W36 × D27.5 × H37.8CM	3ly Gift Box	W35.5 × D27 × H37.2CM
		Carton Size	W55.5 × D37.5 × H39CM
Gift Box N.W. / G.W.	JY-C-10L:3.6/4.2KGS JY-CS-10L:5.0/5.5KGS	Carton N.W. / G.W.	JY-C-10L:7.2/9.2KGS JY-CS-10L:10.0/12.0KGS
20GP/ 40GP /40HQ	774/1576/1843PCS	20GP/ 40GP /40HQ	716/1432/1706PCS



JY-D-10L JY-DS-10L JY-E-10L JY-ES-10L

10L


THERMOELECTRIC COOLER
AND WARMER



JY-D-10L/JY-DS-10L




JY-E-10L/JY-ES-10L



AC 100-120V or 220-240V

Cooling

JY-D-10L
JY-E-10L



AC 100-120V or 220-240V

Heating

JY-DS-10L
JY-ES-10L

Power consumption JY-D-10L/JY-E-10L

	AC230 V	DC12V
Cold	52W	40W
Warm	45W	36W

Power consumption JY-DS-10L/JY-ES-10L

	AC230 V	DC12V
Cold	75W	60W
Warm	60W	50W



		Specification	
Main Material	ABS & Aluminum	Cooling Capacity	JY-D/E-10L:18°C - 20°C below ambient temperature JY-DS/ES-10L:23°C - 28°C below ambient temperature
Insulation	Poly foam lid/PU foam body	Heating Capacity	55°C ± 5°C by set-point thermostat
Product Weight	JY-D/E-10L:3.6KGS JY-DS/ES-10L:5.0KGS	Voltage	100-120V AC/12V DC 220-240V AC/12V DC
Features	JY-D-10L: with mirror and LED light. Single cooling system JY-DS-10L: with mirror and LED light. Double cooling system JY-E-10L: with mirror and LED light and LED temperature display. Single cooling system JY-ES-10L: with mirror and LED light and LED temperature display. Double cooling system		
Packaging Information			
1pcs (For online retail)		2pcs	
Carton size	W36 × D27.5 × H37.8CM	3ly Gift Box	W35.5 × D27 × H37.2CM
		Carton Size	W55.5 × D37.5 × H39CM
Gift Box N.W. / G.W.	JY-D/E-10L: 3.6/4.2KGS JY-DS/ES-10L: 5.0/5.5KGS	Carton N.W. / G.W.	JY-D/E-10L: 7.2/9.2KGS JY-DS/ES-10L: 10.0/12.0KGS
20GP/ 40GP /40HQ	774/1576/1843PCS	20GP/ 40GP /40HQ	716/1432/1706PCS








JY-B-15L JY-BS-15L

15L

THERMOELECTRIC COOLER
AND WARMER

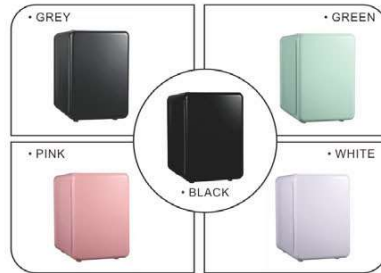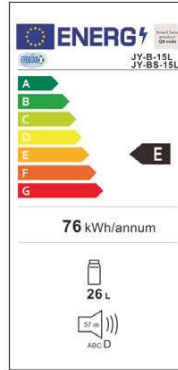

◆ Power consumption JY-B-15L

	AC230 V	DC12V
Cold	60W	45W
Warm	55W	40W

◆ Power consumption JY-BS-15L

	AC230 V	DC12V
Cold	75W	60W
Warm	60W	50W



Specification			
Main Material	ABS & Aluminum	Cooling Capacity	JY-B-15L:18℃ - 20℃ below ambient temperature JY-BS-15L:23℃ - 28℃ below ambient temperature
Insulation	Poly foam lid/PU foam body	Heating Capacity	55℃ ± 5℃ by set-point thermostat
Product Weight	JY-B-15L: 4.5KGS JY-BS-15L: 5.6KGS	Voltage	100-120V AC/12V DC 220-240V AC/12V DC
Features	Attractive outlook and practical function. With two movable shelves. Can store everything you want JY-B-15L:single cooling system. JY-BS-15L: double cooling system		
Packaging Information			
1pcs (For online retail)		2pcs	
Carton size	W40 × D31.5 × H45.3CM	3ly Gift Box	W38.5 × D31.3 × H44.5CM
		Carton Size	W64.5 × D40 × H46.5CM
Gift Box N.W. / G.W.	JY-B-15L:4.5/5.5KGS JY-BS-15L: 5.6/6.6KGS	Carton N.W. / G.W.	JY-B-15L:9.0/11.0KGS JY-BS-15L: 11.2/13.2KGS
20GP/ 40GP /40HQ	500/1000/1200PCS	20GP/ 40GP /40HQ	470/960/1040PCS



JY-C-15L JY-CS-15L

15L

THERMOELECTRIC COOLER
AND WARMER

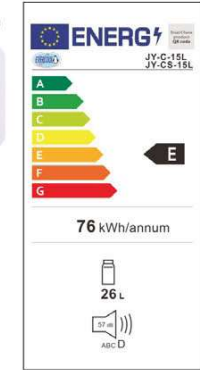

◆ Power consumption JY-C-15L

	AC230 V	DC12V
Cold	60W	45W
Warm	55W	40W

◆ Power consumption JY-CS-15L

	AC230 V	DC12V
Cold	75W	60W
Warm	60W	50W

		Specification	
Main Material	ABS & Aluminum	Cooling Capacity	JY-C-15L:18℃ - 20℃ below ambient temperature JY-CS-15L:23℃ - 28℃ below ambient temperature
Insulation	Poly foam lid/PU foam body	Heating Capacity	55℃ ± 5℃ by set-point thermostat
Product Weight	JY-C-15L: 5.0KGS JY-CS-15L: 5.8KGS	Voltage	100-120V AC/12V DC 220-240V AC/12V DC
Features	Attractive outlook and practical function. With two movable shelves. Can store everything you want. JY-C-15L: single cooling system. JY-CS-15L: double cooling system		
Packaging Information			
1pcs (For online retail)		2pcs	
Carton size	W40 × D31.5 × H45.3CM	3ly Gift Box	W39.5 × D31.3 × H44.5CM
		Carton Size	W64.5 × D41 × H46.5CM
Gift Box N.W. / G.W.	JY-C-15L: 5.0/6.0KGS JY-CS-15L: 5.8/6.8KGS	Carton N.W. / G.W.	JY-C-15L: 10.0/12.0KGS JY-CS-15L: 11.6/13.6KGS
20GP/ 40GP /40HQ	500/1000/1200PCS	20GP/ 40GP /40HQ	470/960/1040PCS







JY-D-15L JY-DS-15L 15L

THERMOELECTRIC COOLER AND WARMER




JY-E-15L JY-F-15L JY-ES-15L JY-FS-15L 15L

THERMOELECTRIC COOLER AND WARMER

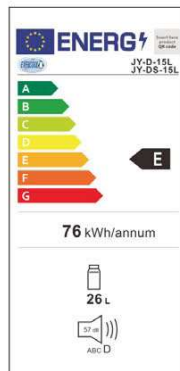

Intelligent LED Display on Glass Door

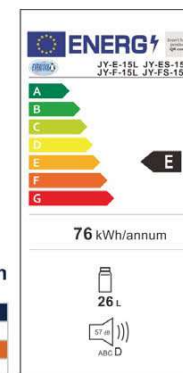

Power consumption

JY-D-15L	
	AC230 V
Cold	60W
Warm	55W

Power consumption

JY-DS-15L	
	AC230 V
Cold	75W
Warm	60W



Power consumption

JY-E-15L/ JY-F-15L	
	AC230 V
Cold	60W
Warm	55W

JY-ES-15L/ JY-FS-15L	
	AC230 V
Cold	75W
Warm	60W

Specification		
Main Material	ABS & Aluminum	Cooling Capacity
Insulation	Poly foam lid/PU foam body	JY-D-15L:18°C - 20°C below ambient temperature
Product Weight	JY-D-15L: 5.0KGS	JY-DS-15L:23°C - 28°C below ambient temperature
Features	With the glass door and with the LED digital display. The inside temperature can be read at glance. And can set the temperature.	Heating Capacity
	JY-D-15L:single cooling system. JY-DS-15L: double cooling system	55°C ± 5°C by set-point thermostat
Packaging Information		
1pcs (For online retail)	2pcs	
Carton size	W40 × D31.5 × H45.3CM	3ly Gift Box
Gift Box N.W. / G.W.	JY-D-15L:5.0/6.0KGS	W39.5 × D31.3 × H44.5CM
20GP/ 40GP /40HQ	500/1000/1200PCS	Carton Size
		W64.5 × D41 × H46.5CM
		Carton N.W. / G.W.
		JY-D-15L:10.0/12.0KGS
		JY-DS-15L:11.6/13.6KGS
		20GP/ 40GP /40HQ
		470/960/1040PCS

Specification		
Main Material	ABS & Aluminum	Cooling Capacity
Insulation	Poly foam lid/PU foam body	JY-E-15L:18°C - 20°C below ambient temperature
Product Weight	JY-E-15L: 5.0KGS	JY-F-15L:23°C - 28°C below ambient temperature
Features	JY-E-15L: with mirror and LED light. Single cooling system	Heating Capacity
	JY-ES-15L: with mirror and LED light. Double cooling system	55°C ± 5°C by set-point thermostat
	JY-F-15L: with mirror and LED light and LED temperature display. Single cooling system	Voltage
	JY-FS-15L: with mirror and LED light and LED temperature display. Double cooling system	100-120V AC/12V DC
Packaging Information		
1pcs (For online retail)	2pcs	
Carton size	W40 × D31.5 × H45.3CM	3ly Gift Box
Gift Box N.W. / G.W.	JY-E-15L:5.0/6.0KGS	W39.5 × D31.3 × H44.5CM
20GP/ 40GP /40HQ	500/1000/1200PCS	Carton Size
		W64.5 × D41 × H46.5CM
		Carton N.W. / G.W.
		JY-E-15L:10.0/12.0KGS
		JY-ES-15L:11.6/13.6KGS
		20GP/ 40GP /40HQ
		470/960/1040PCS



**JY-A-15L 15L****THERMOELECTRIC COOLER
AND WARMER**


Specification			
Main Material	ABS & Aluminum	Cooling Capacity	18℃ - 20℃ below ambient temperature
Insulation	Poly foam or PU foam	Heating Capacity	55℃ ± 5℃ by set-point thermostat
Product Weight	5KGS	Voltage	100-120V AC/12V DC 220-240V AC/12V DC
Features	Such mini fridge combine powerful thermoelectric technology with cool elegance and are light weight, compact and portable. Adjustable shelf adjust spacing according to your needs. Made by ABS plastics, anti-seismic.		
Packaging Information			
1pcs (For online retail)		2pcs	
Carton size	W39.5 × D26.5 × H46.5CM	3ly Gift Box	W39.5 × D29.5 × H46.5CM
		Carton Size	W61.0 × D41.5 × H48.5CM
Gift Box N.W. / G.W.	5.0/6.0KGS	Carton N.W. / G.W.	10.0/12.0KGS
20GP/ 40GP /40HQ	530/1060/1270PCS	20GP/ 40GP /40HQ	480/1000/1140PCS

**EC-0214 14L****THERMOELECTRIC COOLER
AND WARMER**

EC-0214A



EC-0214C

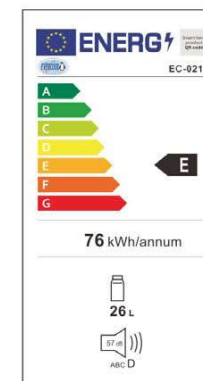

Here's one for the lover of the perfect design. The small 'personal refrigerator' does the job at least as same as home fridge. The difference is it can be taken wherever you need it: kitchen, bar, terrace or garden.

1. Attractive outlook appeals to a wide range of consumers.
2. Several door styles for choice, Transparent door for easy looking inside, more beautiful
3. Adjustable shelves adjust spacing according to your needs
4. Chrome door handle, NO rust
5. Made by ABS plastics, anti-seismic, wear-resisting
6. Installed the condensed water tray
7. High performance, can be placed anywhere you like



Model No.	Storage Capacity	Voltage	Cooling capacity	Heating capacity	Unit dimension (mm)	Giftbox dimension (mm)	Carton dimension (mm)	N.W G.W	20' GP	40' GP	40HQ
EC-0214A	14L	DC 12V AC 100-240V	18-20°C Delta	50-60°C	323*320*424	324*316*430	655*340*455/2PCS	12KGS 13KGS	570pcs	1200pcs	1360pcs
EC-0214C	14L	DC 12V AC 100-240V	18-20°C Delta	50-60°C	323*320*424	340*350*460	690*365*460/2PCS	12KGS 13KGS	500pcs	1055pcs	1200pcs





JYS-22 22L
JYS-28 28L

JYS-24 24L
JYS-32 32L


SOFT BAG COOLER



JYS-15 15L
JYS-36 36L

JYS-20 20L

SOFT BAG COOLER

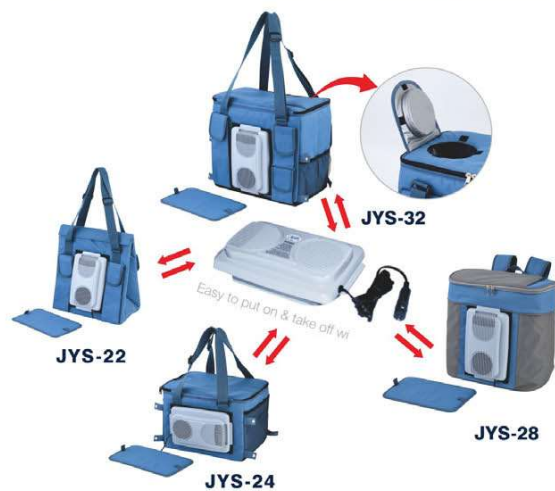

Model No.	Storage Capacity	Voltage	Cooling capacity	Product size	Folded size	Carton dimension	N.W	G.W	20'GP	40'GP	40'HQ	MOQ
JYS-22	22L	DC 12V	10-13°C Delta	36*23*39cm	38*40*10cm	40*42*62cm/6pcs	12KGS	14KGS	1671pcs	3399pcs	3975pcs	500pcs
JYS-24	24L	DC 12V	10-13°C Delta	35.5*28*26cm	38*28*13cm	58*40*67cm/10pcs	11KGS	13KGS	1866pcs	3796pcs	4439pcs	500pcs
JYS-28	28L	DC 12V	10-13°C Delta	37*21.5*37cm	50*38*10cm	52*40*62cm/6pcs	12KGS	14KGS	1349pcs	2745pcs	3210pcs	500pcs
JYS-32	32L	DC 12V	10-13°C Delta	39*24*36cm	40*39*12cm	42*41*74cm/6pcs	12KGS	14KGS	1365pcs	2778pcs	3249pcs	500pcs



RoHS

Model No.	Storage Capacity	Voltage	Cooling capacity	Product size	Folded size	Carton dimension	N.W	G.W	20'GP	40'GP	40'HQ	MOQ
JYS-15	15L	DC 12V	10-13°C Delta	27*18*32cm	28*34*9cm	58*36*56cm/12pcs	17.5KGS	19.5KGS	2976pcs	6055pcs	7081pcs	1000pcs
JYS-20	20L	DC 12V	10-13°C Delta	36*18*35cm	50*38*7cm	52*40*58cm/8pcs	12KGS	14KGS	1923pcs	3912pcs	4576pcs	800pcs
JYS-36	36L	DC 12V	10-13°C Delta	42.5*32.5*33cm	42*36*11cm	44*38*57cm/5pcs	9KGS	11KGS	1521pcs	3095pcs	3620pcs	500pcs





RoHS

MAIN PARTS INTRODUCTION

Thermoelectric cooling system


Our coolers perform by using a thermoelectric Peltier Element. This is a high performance thermoelectric system with extremely reliable technology.



for car DC12V



Peltier element

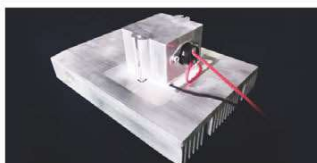

Built-in Switching Power Supply(1)
For AC/DC version




for AC 100-240V

DC compressor cooling system



DC COMPRESSOR

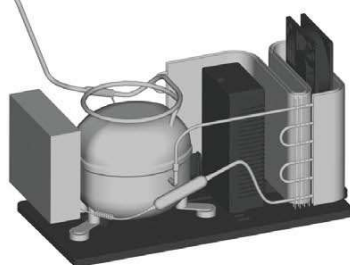

Our compressor fridge freezer adopts compressor cooling system, including DC compressor, control box, condenser, evaporator, switch power supply, etc.

ACCESSORIES(Optional)

Cooling now also with mains connection ! (Small size with good performance!)



Mains Unit(Adaptor)

For connecting 12V Cool Boxes to the AC mains, also an all-purpose mains unit. Ideal for use at home, on camping sites, in hotels or weekend homes.
Art.No. LY065RGM120500

GS&CE, ETL approved
Input voltage: 100-240V AC/50-60Hz
Output: 12V DC 5A



PLUG LIST



AC PLUG LIST

AC POWER CORD
100-120V or 220-240V 1.8M



CCC



VDE



VDE



BS



UL



SAA



PSE



KTL



Inmetro



S-Mark



NEMA



SABS



DC PLUG LIST

DC POWER CORD
12V 20A



PACKING WAY

NORMAL PACKING

3ly color box
and 5ly carton box



TISSUE PAPER



NORMAL PACKING

5ly color box
with shrink wrap



TISSUE PAPER



ONLINE SALES PACKING

Each product with foam
and stronger 5ly carton box



PAPER TRAY



ECONOMIC PACKING

Color paper with shrink wrap
4pcs on Tray





ABOUT OUR COMPANY

47 YEARS OF T.E. PRODUCT EXPERIENCE &
SPECIALIZING IN COOLING TECHNOLOGY



COMPANY INTRODUCTION

Ningbo Jiayuan Electronic Co., Ltd. is one of the most experienced manufacturers of T.E. coolers/warmers in Asia. We excel in product design, tooling, production, and quality control. To maintain our leadership in thermoelectric products and meet the demands of a competitive market, we continuously develop new models every year. We pride ourselves on offering a significantly wider product range compared to our competitors.

Since 1978, our brand "EVERCOOL" has become a globally recognized name. We have consistently led the industry in technology, management, and product development.

Our products are exported to numerous countries and regions, including the UK, Denmark, Finland, France, Norway, Poland, Sweden, the Netherlands, the USA, Argentina, Australia, Brazil, Japan, Saudi Arabia, South Korea, the UAE, and more.

In recent years, we have introduced a variety of cutting-edge equipment, such as the PU foaming machine, constant temperature test rooms, cooling element performance testing instruments, and refrigerant leakage test instruments.

As an ISO 9001 and BSCI-certified company, we have obtained CE, ERP, ETL, GS, LFGB, REACH, ROHS, and SAA certifications for nearly all our products.

We warmly welcome OEM/ODM projects. Whether you are selecting a product from our catalog or seeking engineering assistance for your application, our customer service team is ready to discuss your sourcing needs.


Our president, Mr. Jack Shen, brings 28 years of solid experience in the T.E. product field. Most of Jiayuan's staff are highly experienced and always available to discuss your requirements. We are committed to rigorous quality control, shorter production cycles, and considerate service.

Jiayuan's mission is to become a professional, efficient, innovative, and high-quality enterprise that prioritizes sustainable development, employee well-being, environmental protection, customer feedback, and social contribution.

The Jiayuan Team sincerely welcomes customers, partners, and friends from around the world to collaborate with us. We look forward to meeting you and showcasing more about our company.

Wishing you a wonderful day!

Best regards,
Jiayuan Team

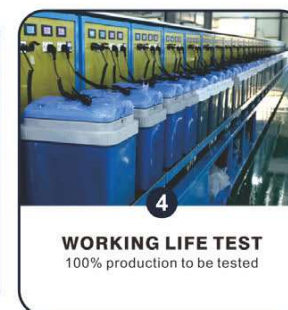



ABOUT OUR COMPANY

47 YEARS OF T.E. PRODUCT EXPERIENCE &
SPECIALIZING IN COOLING TECHNOLOGY

◆ OEM PRODUCT MEETING



◆ INCOMING MATERIAL WAREHOUSE



◆ INCOMING QUALITY CONTROL



◆ TEST ROOM



◆ TESTING EQUIPMENT



PU FOAMING PRODUCTION PROCESS



PU Foaming main equipments- 'CANNON', from Itslian. Automatically set the desired material weight. Help better Insulation foaming effect.




Adopted blowing agent 'cyclopentane' for PU foam insulation which is CFC & HCFC free.



Using metallic fixtures during PU foaming process, then pass through a heat channel which maintain 65°C for the enviroment tempeature, so PU foam insulation is sufficient and uniform foaming.



High density
26-28kg/m³
uniform foaming

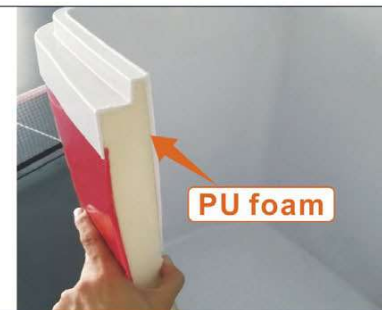

PU foam Insulation crosscutting pictures





**47 YEARS OF T.E. PRODUCT EXPERIENCE &
SPECIALIZING IN COOLING TECHNOLOGY**

OEM PROCESS



ODM PROCESS



We will according to their request to make 2D drawing to let them confirm the size.

Then we will make
3d drawing.

Confirm the structure and the function.

Mold Lead time.

Finally we will send the sample to brand customers.

CERTIFICATE

